

Submitted Model No.: _____

Specific Features: _____



see what Delta can do™

HAND SHOWER

■ Five Spray Setting Hand Shower

FEATURES:

- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:


- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa
- Five spray setting hand shower - pause is a non-positive shut-off
- 60-82" Stretchable metal hose.
- Easy turn dial changes spray patterns
- Traditional slide bar. Suggest 23 3/4" on center: 51508
- Adjustable wall mount: 59515
- Shower arm mount: 59355-▲PK

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.


COMPLIES WITH:

- ASME A112.18.1/CSA B125.1◆

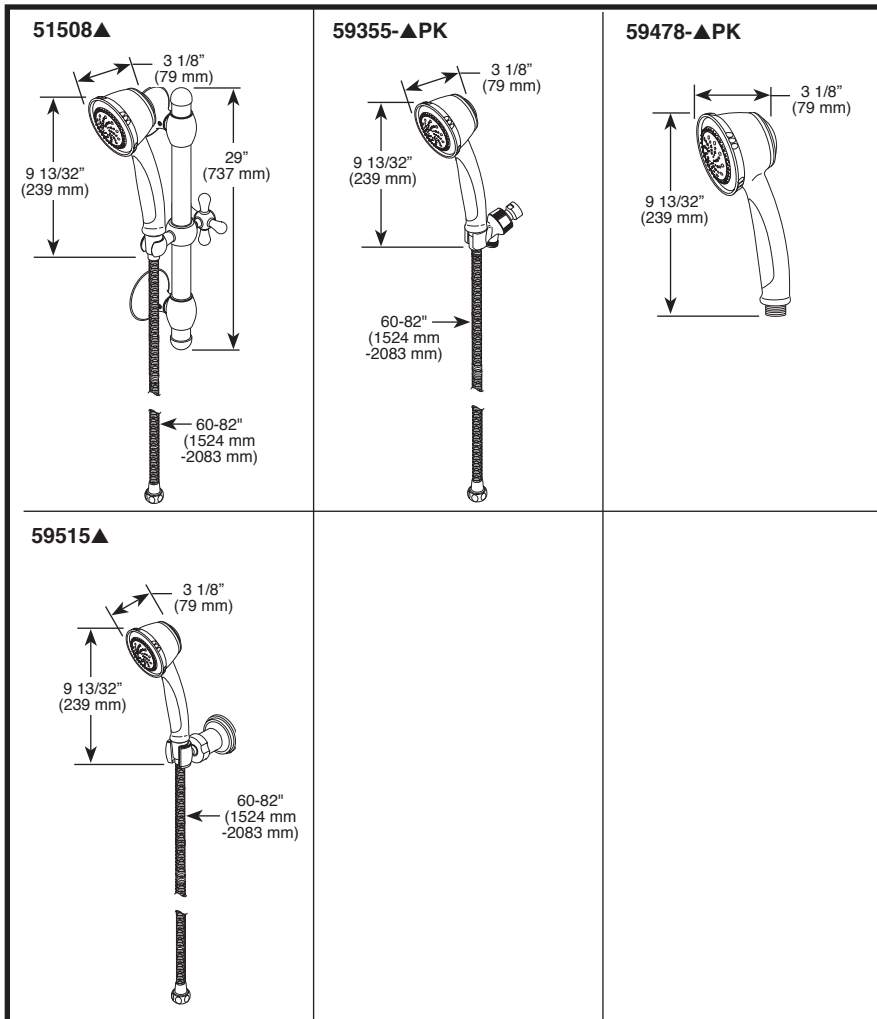

▲ Designate proper finish suffix

Spray Patterns

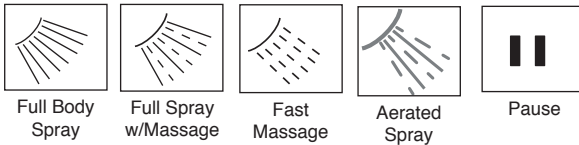

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-51508 Rev. E

Delta Faucet Company
 55 E. 111th Street, Indianapolis, IN 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2018 Delta Faucet Company