

# ETEREA 2.0 collection

Danesi & Buzzoni




# battery lamp applique pendant portable product



applique


Eterea takes inspiration from the classic lantern, proposed in its essential forms. Ancient memories are constituted by pure and geometric lines, able to create an incorporeal volume, made up only of light. By its diffused light, it perfectly fits on terraces, gardens and arcades. Eterea just like the classic lanterns, can be placed directly on the ground or fixed to a wall by means of its bracket. A touch of functional design is given by a transparent clip to secure the cable to the vertical uprights. Eterea is now also available in small, medium and large battery-powered version.

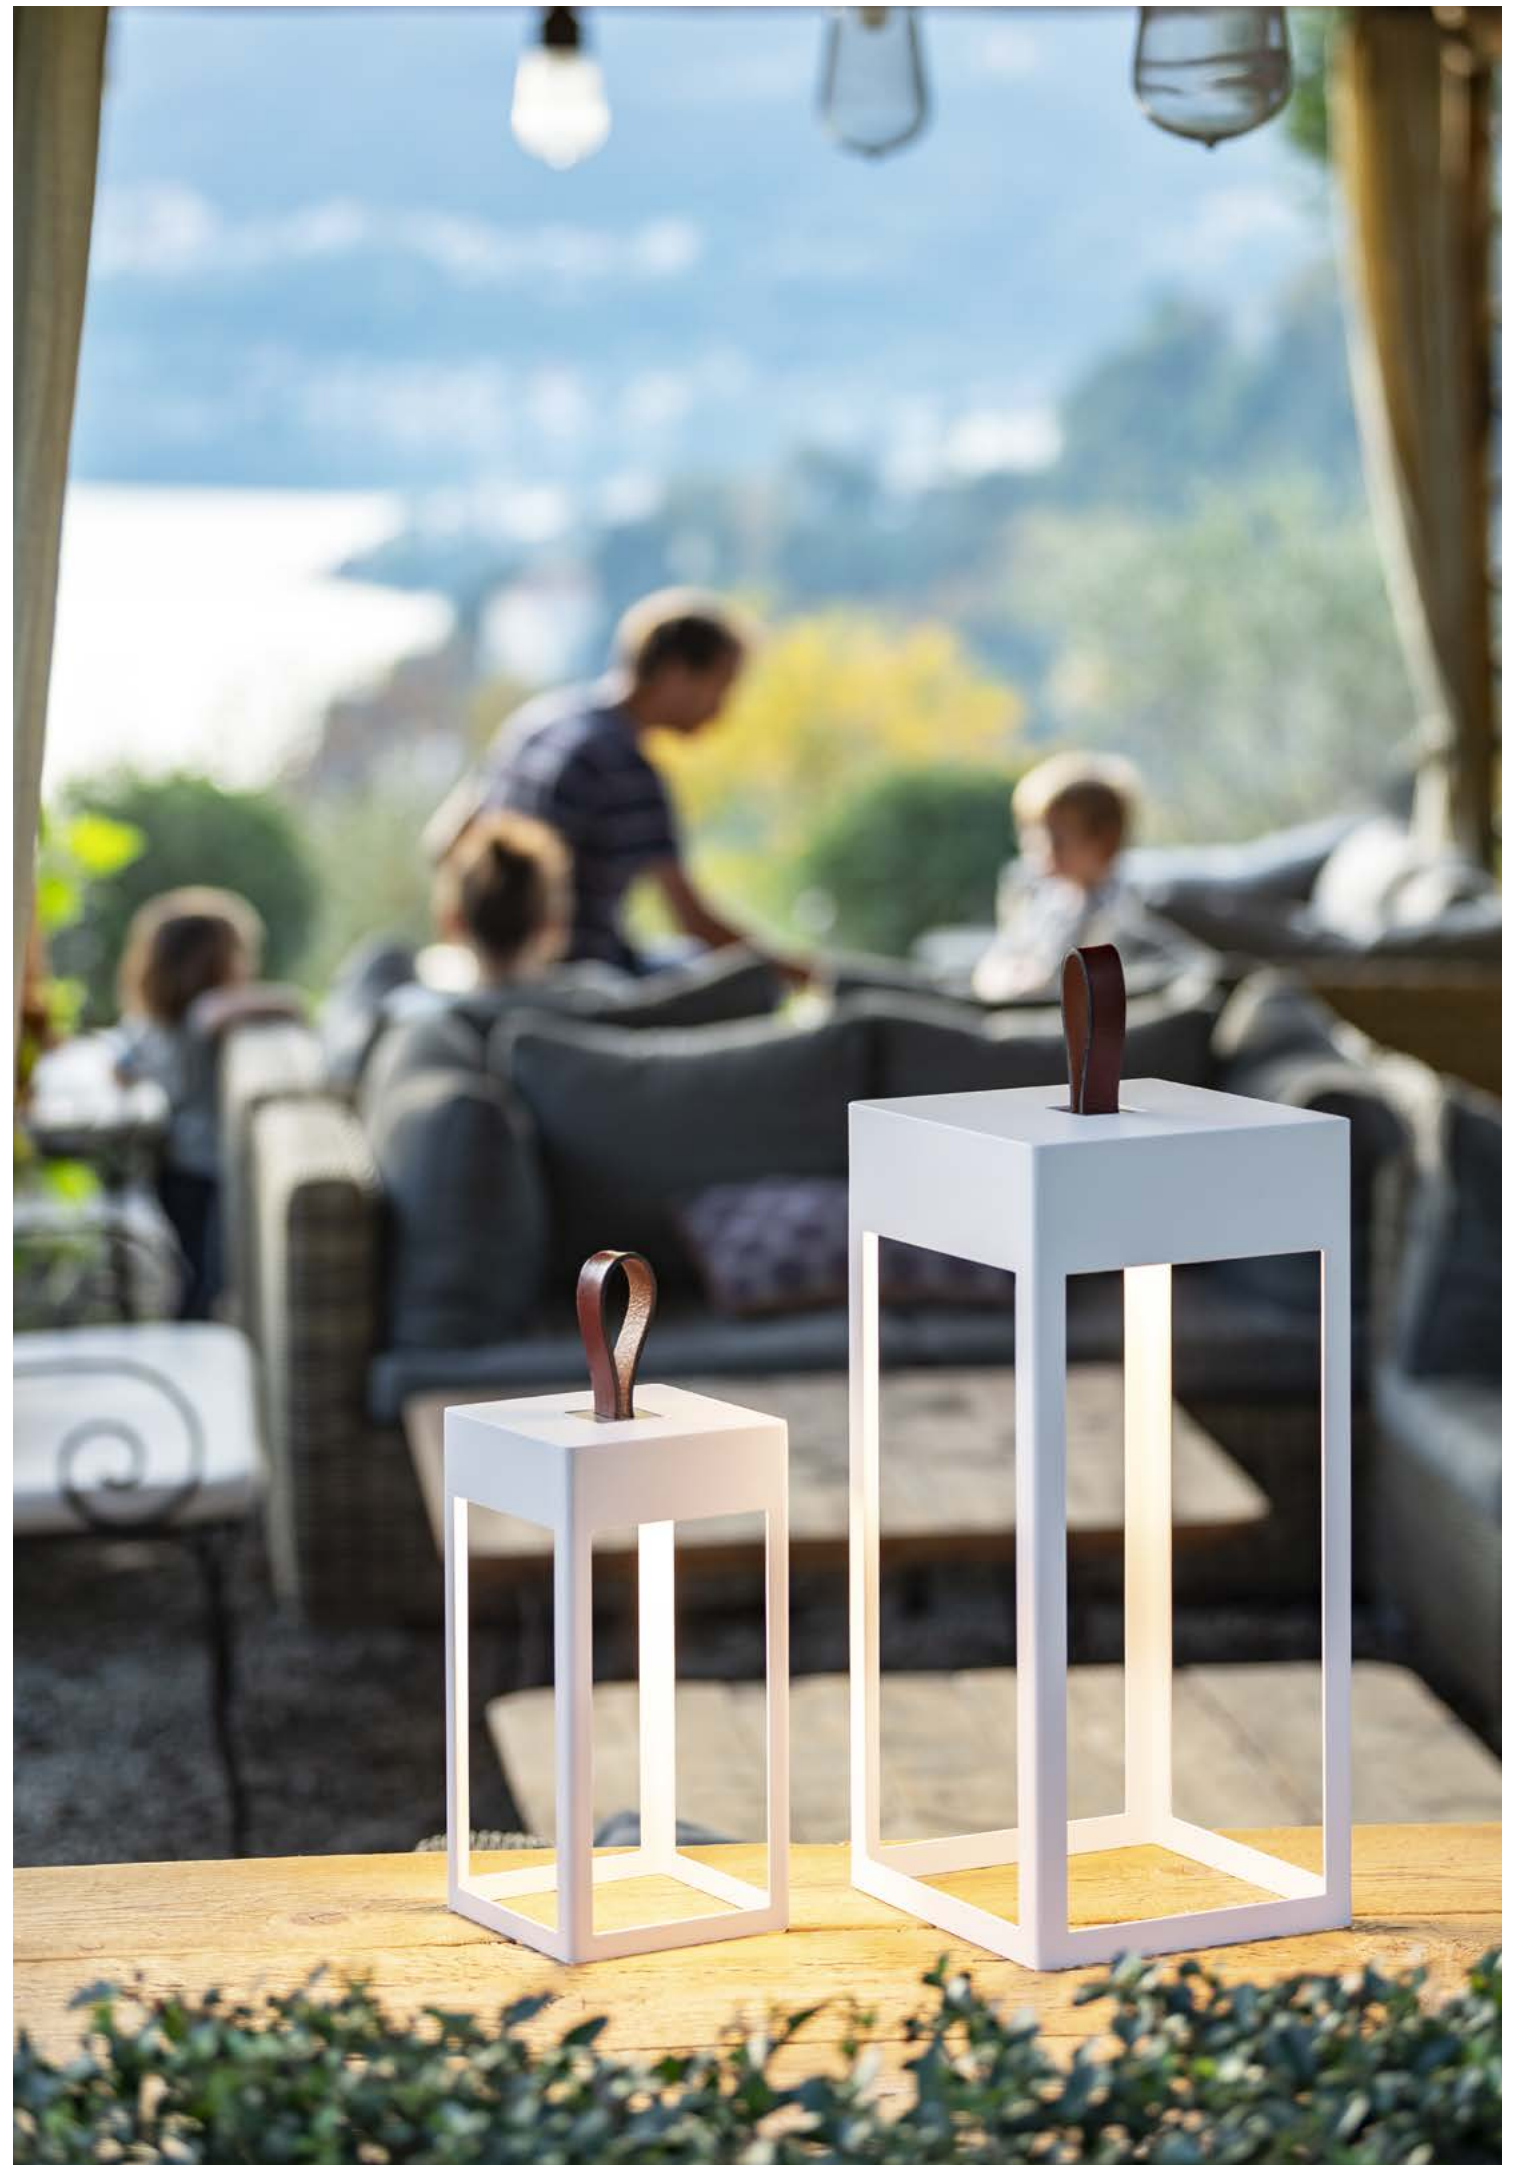

battery lamp




battery lamp

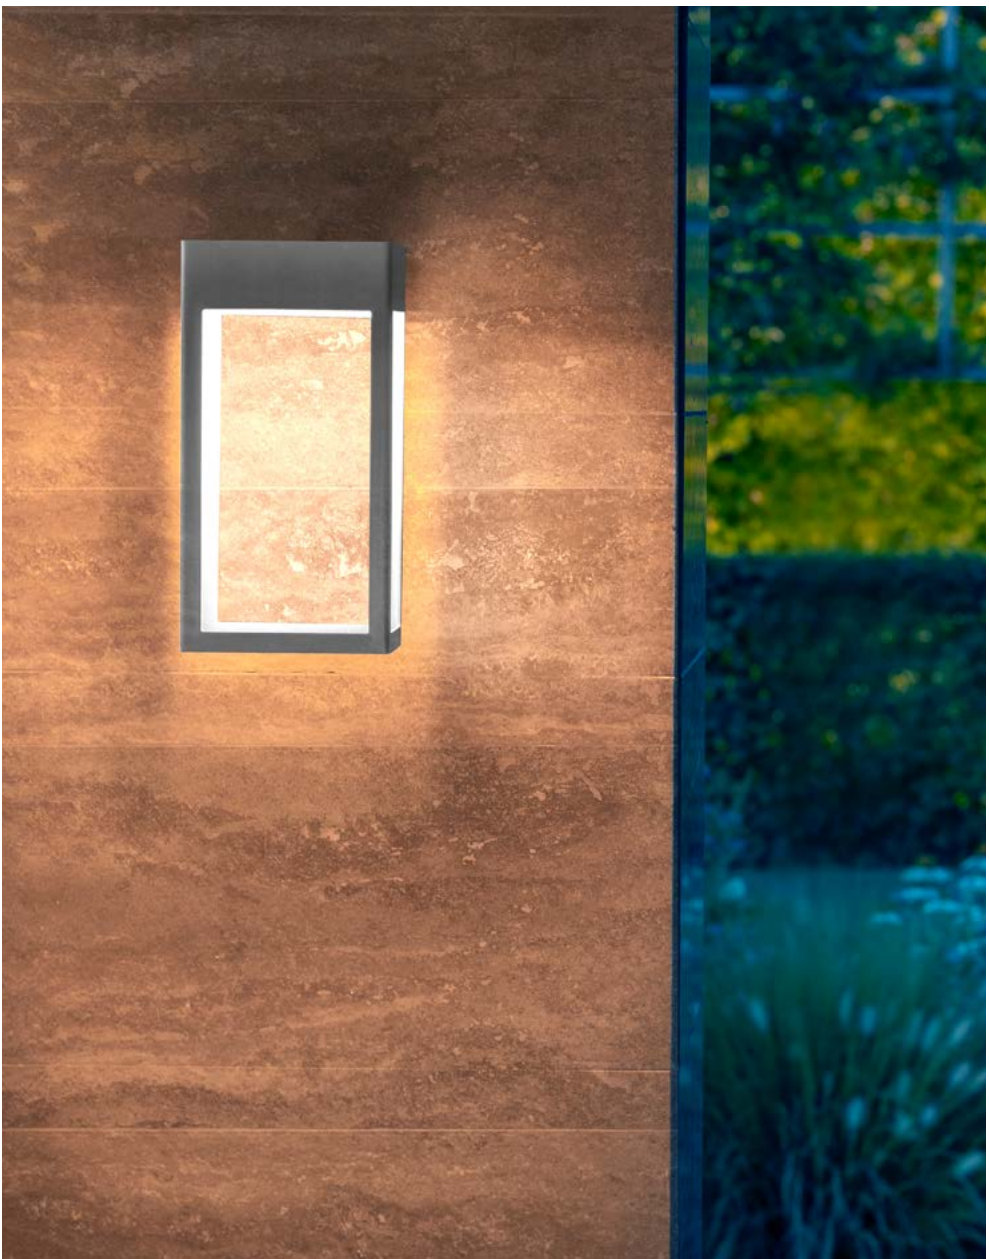

applique




movable cable lamp

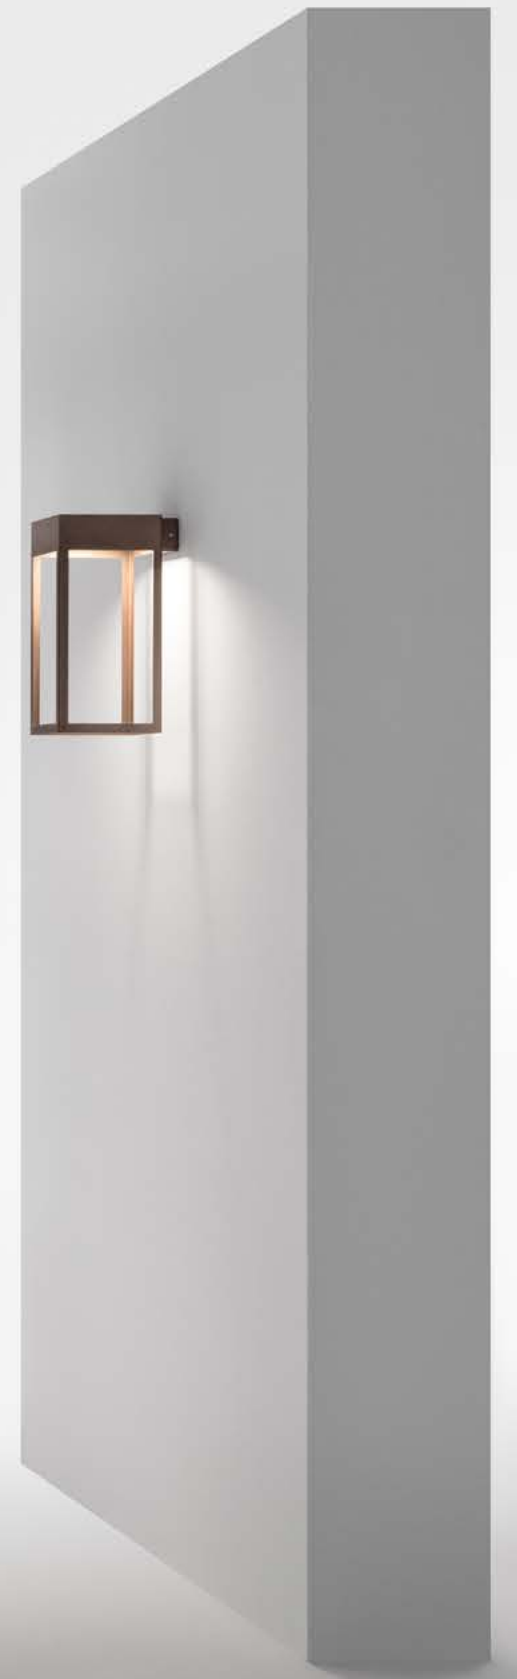




battery lamp

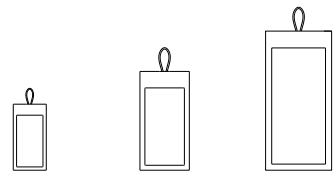
IP65  
IK 072,5 mm Photo-etched  
methacrylate100 x 100 x h. 200 mm  
150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

applique


IP65

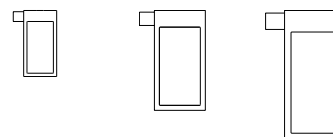small: IK 05  
2,5 mm Photo-etched  
methacrylatemedium and large: IK08  
4 / 6 mm thick white  
tempered glass100 x 100 x h. 200 mm  
150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

downlight

IP65  
IK 084 / 6 mm thick white  
tempered glass150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

portable product

IP65  
IK 084 / 6 mm thick white  
tempered glass150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

## details

→ AISI 430 stainless steel body. Adjustable retractable handle in AISI 304 stainless steel. No visible screws. Support feet in PMMA with anti-scratch rubber. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products. A4 Stainless steel screws.

→ ETEREA Battery version.

Battery-operated IP65 outdoor lighting. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. Etruscan leather handle with 4 mm black edges. Panasonic lithium battery, so as to guarantee long life product. Maintaining the aesthetics of the cable version, a high efficiency and long-lasting battery -powered product has been developed. A luminous flux of 400 lm is guaranteed for 6 hours, with battery recharging time from 0 to 100% in 6 hours, by means of a 1A charger.

## standard finishes



.02 white


.07 corten

.08 anthracite

## battery lamp

small  
medium  
large100 x 100 x h. 200 mm  
150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

USB 1 m cable included

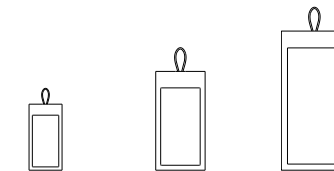

WHITE LED

3000K CRI>80  
battery charged 2700K  
available on request

→ h. 200 mm

1W | 75 lm (\*)  
diffuse100°  
480 cd/klm

→ h. 300 mm

2,8W | 275 lm (\*)  
diffuse100°  
420 cd/klm

→ h. 455 mm

2,8W | 275 lm (\*)  
diffuse100°  
420 cd/klm

(\*) Real Data



# applique




small  
medium  
large

small:  
100 x 100 x h. 200 mm  
IP67 connector included

medium:  
150 x 150 x h. 300 mm  
IP68 connector included

large:  
215 x 215 x h. 455 mm  
IP68 connector included



WHITE LED

→ h. 200 mm

→ h. 300 mm

→ h. 455 mm

3000K CRI>80  
220-240V 50/60Hz ⊕



4W | 180 lm (\*)  
diffuse



9,6W | 385 lm (\*)  
diffuse



17,5W | 735 lm (\*)  
diffuse

2700K / 4000K  
available on request



114°  
400 cd/klm



114°  
400 cd/klm



114°  
420 cd/klm

# pendant

NEW




medium  
large

150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

IP68 connector  
included

5 m cable length



WHITE LED

→ h. 300 mm

→ h. 455 mm

3000K CRI>80  
220-240V 50/60Hz ⊕



9,6W | 385 lm (\*)  
diffuse



17,5W | 735 lm (\*)  
diffuse

2700K / 4000K  
available on request



114°  
400 cd/klm



114°  
420 cd/klm


# portable product



medium  
large

150 x 150 x h. 300 mm  
215 x 215 x h. 455 mm

5 m cable length



WHITE LED

→ h. 300 mm

→ h. 455 mm

3000K CRI>80  
220-240V 50/60Hz ⊕



9,6W | 385 lm (\*)  
diffuse



17,5W | 735 lm (\*)  
diffuse

2700K / 4000K  
available on request



114°  
400 cd/klm



114°  
420 cd/klm

(\*) Real Data

(\*) Real Data