

PICO




walk over wall recessed ceiling recessed




walk over

A small product showing as pure light when switched on and disappearing as soon as it is off. Pico, whose name means "small quantities", is a minimal product in design and size. For that reason it can be used in multiple series, especially as step marker.

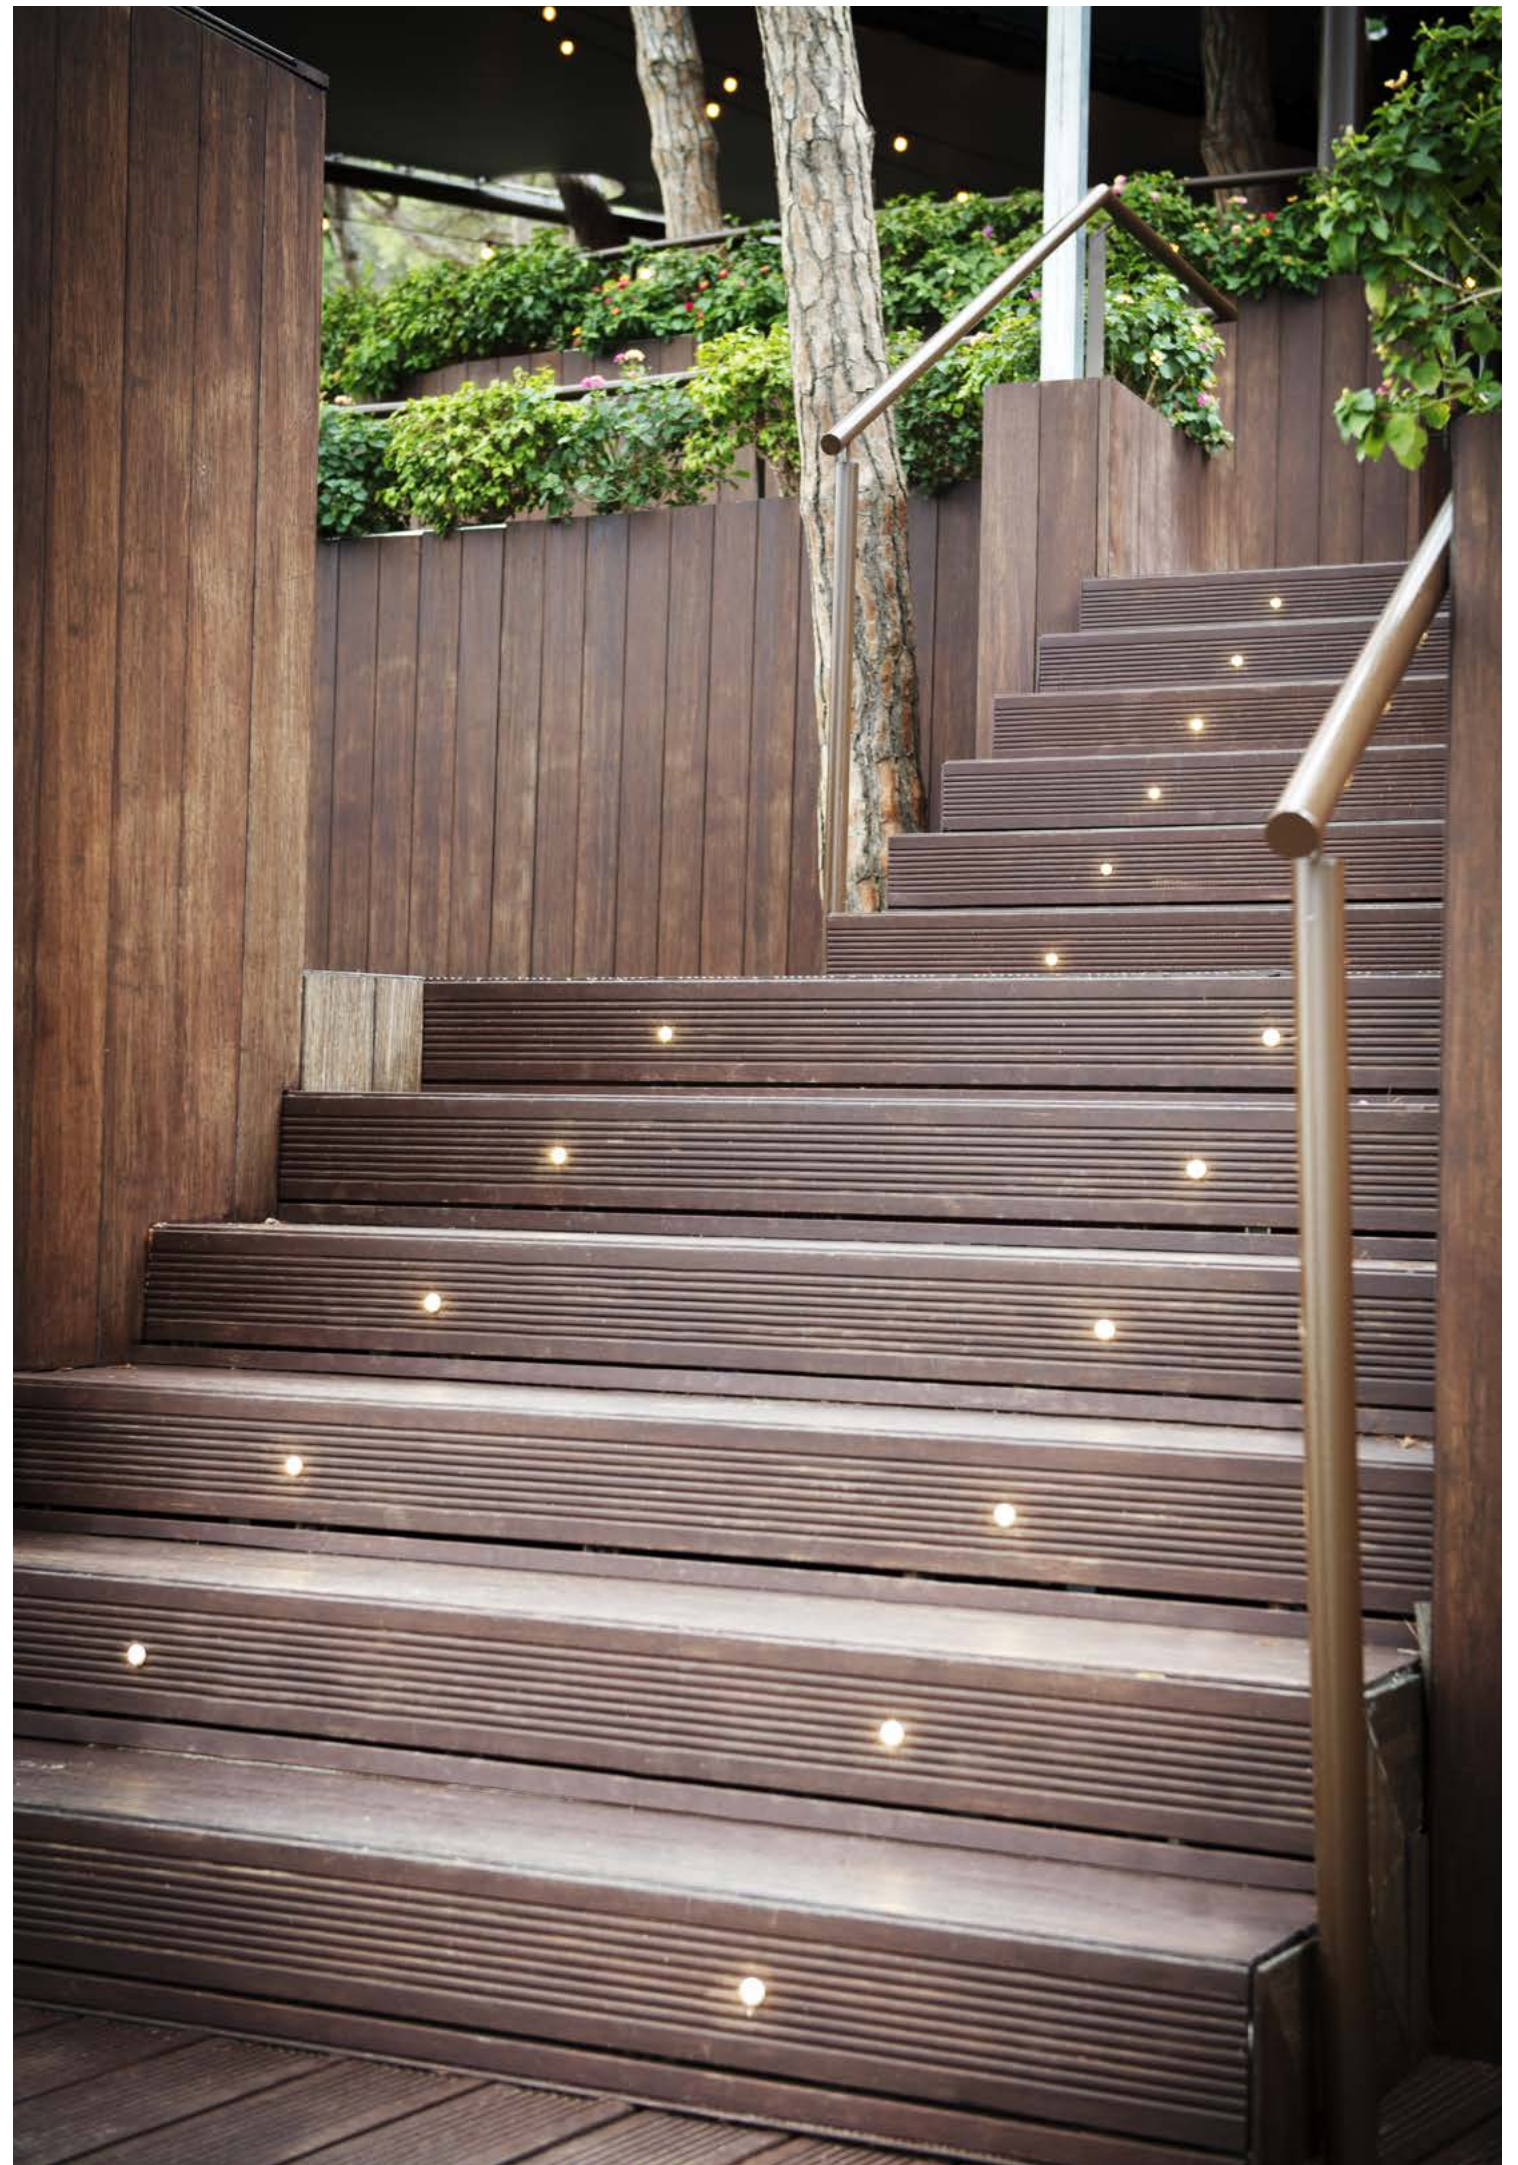

wall recessed

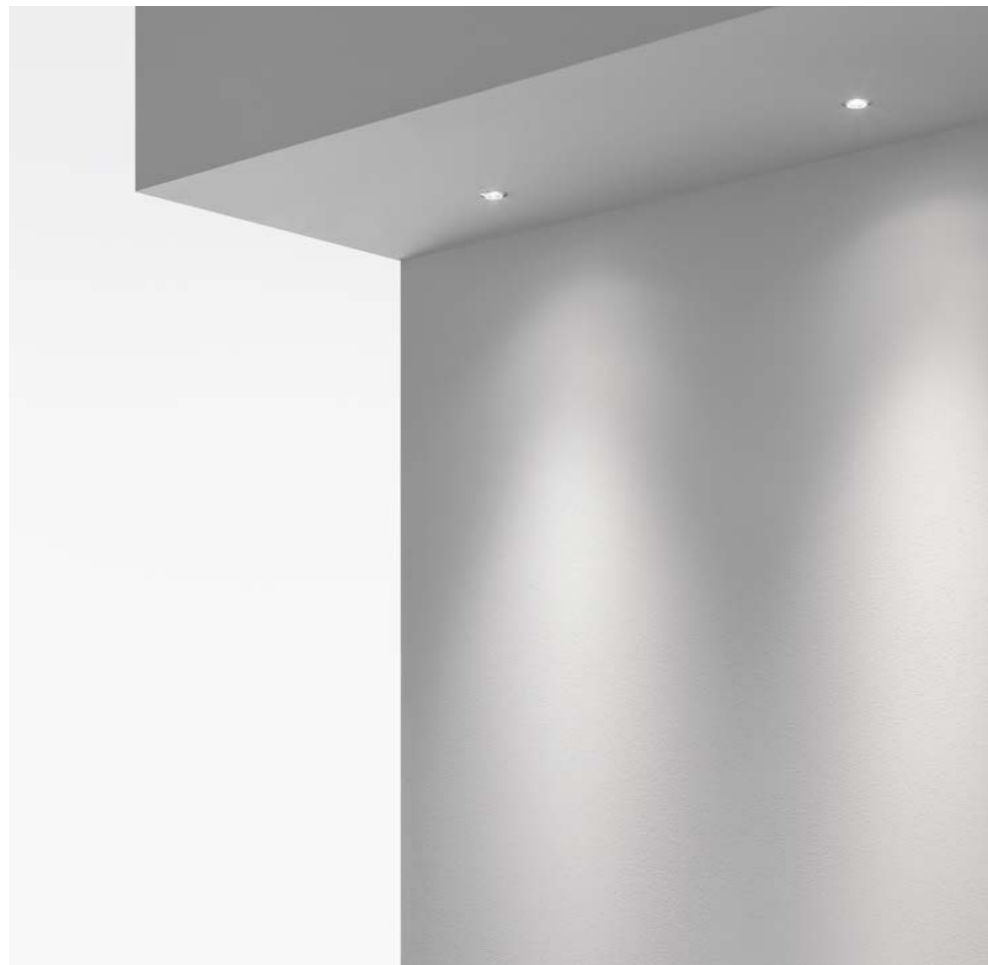

downlight

collection



walk over

IP68 full dry (2m)
IK 07
500 kg

2 mm flat tempered
extra clear glass

5 m cable length

ø 21 x h. 44 mm



wall recessed

IP68 full dry (2m)
IK 07

2 mm flat tempered
extra clear glass

5 m cable length

ø 21 x h. 44 mm



ceiling recessed

IP68 full dry (2m)
IK 07


2 mm flat tempered
extra clear glass

5 m cable length

ø 21 x h. 44 mm
fixing hole ø 17 mm



lighting data

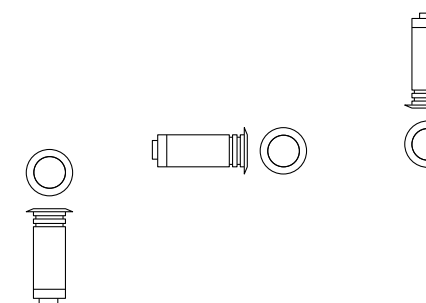

WHITE LED

3000K CRI>80
12V DC

2700K /4000K
available on request



1,3W | 70 lm (*)
spot
transparent glass



20°
5825 cd/klm



1,3W | 55 lm (*)
diffuse
transparent glass




48°
1000 cd/klm

(*) Real Data

details

AISI 316 stainless steel body. No visible screws, fixing with o-ring. IP68 protection rating with Full Dry system which avoids condensing inside the product. Installation cast in concrete with a 20-30 cm gravel drainage bed. Outer casing and connector to be ordered separately. External power supply with 12V DC constant current transformer, to be wired in parallel. Only an IP68 connection to the power supply can guarantee the same protection to the appliance. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

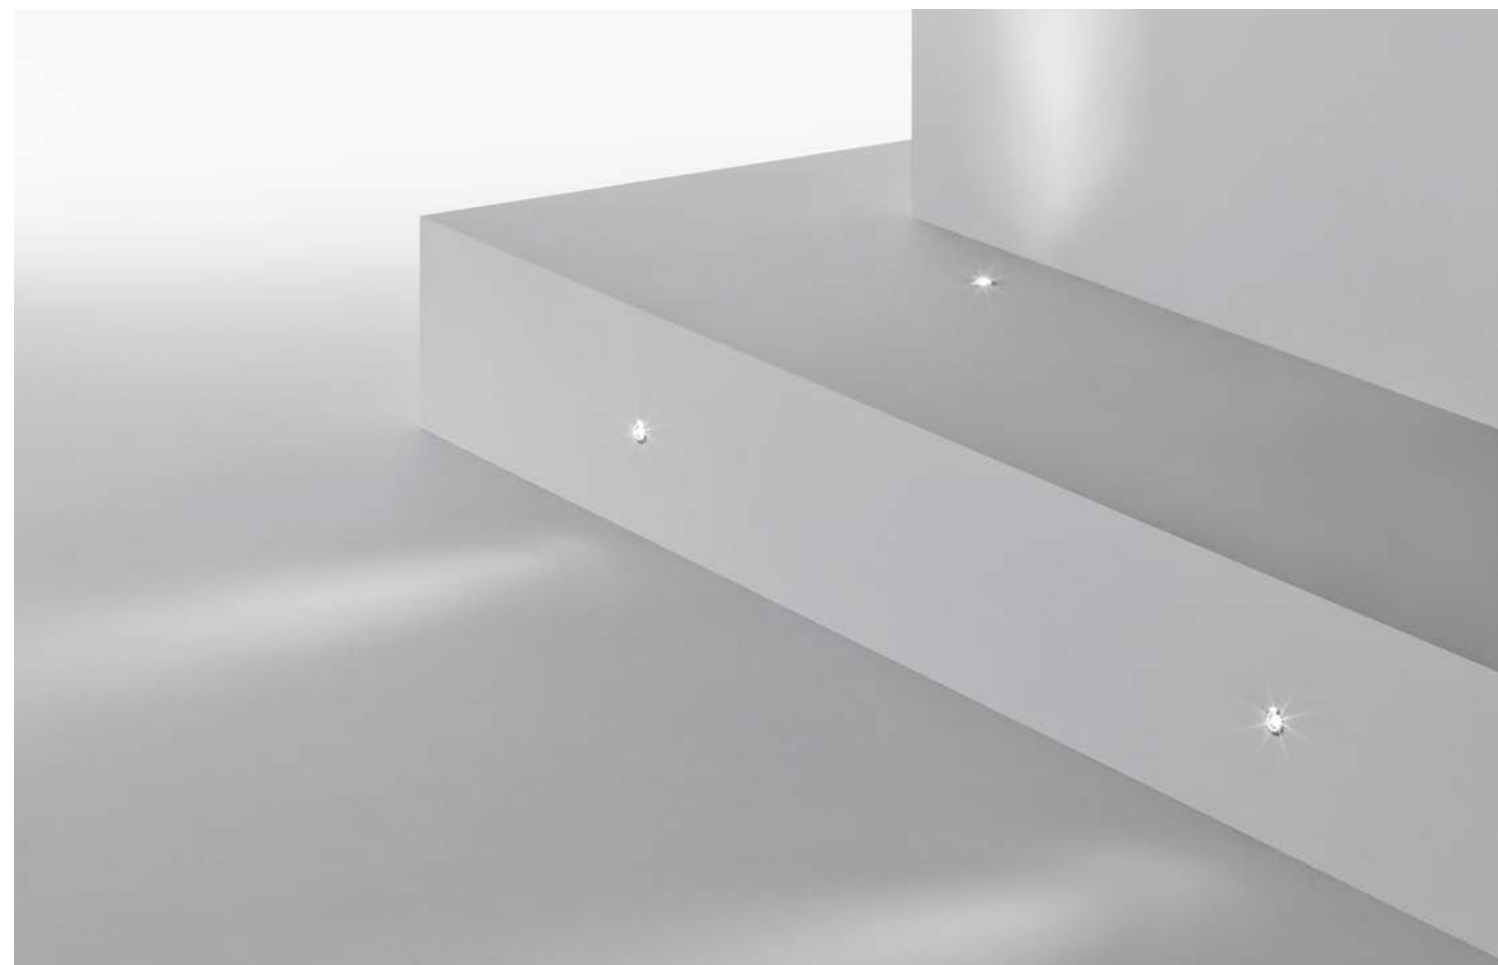

wall recessed / walk over