KOHLER_®

Features

- Bask[®] heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- Single-speed whirlpool offers performance and value, with 5 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Hourglass shape adds style and elegance to your bathroom.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.

Material

Acrylic.

Hydrotherapy

• Whirlpool.

Installation

- Left drain.
- Alcove.

Recommended Products/Accessories

K-1234 Removable Apron K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor K-9695 5-Jet Trim Kit K-24916 Wireless Music Kit K-37380 30" Rough-in Cable Bath Drain K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing K-23726 Drain treatment K-23732 Tub & shower cleaner



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795

KOHLER[®] Plastic Baths and Receptors Lifetime Limited Warranty KOHLER[®] Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune


G9 Sandbar



Mariposa® 5.5' Whirlpool Bath K-1224-LW



Mariposa® 5.5' Whirlpool Bath K-1224-LW

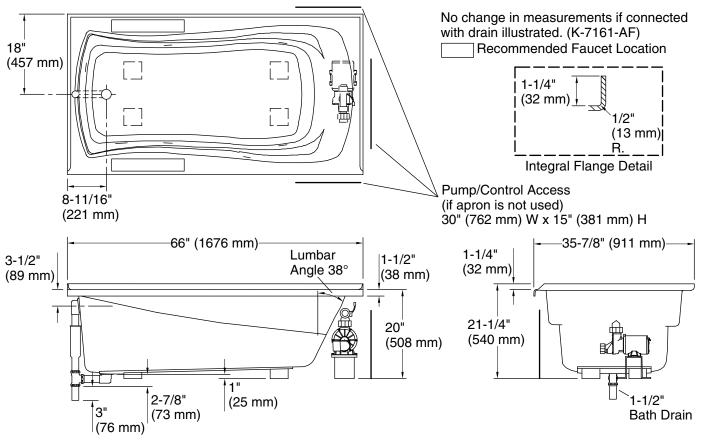

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heated 120 V, 15 A, 60 Hz Surface:

Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	48" x 24" (1219 mm x 610 mm)
Basin area, top:	59" x 30" (1499 mm x 762 mm)
Weight:	116 lbs (52.6 kg)
Minimum floor load:	48 lbs/ft² (234.4 kg/m²)
Water depth:	14" (356 mm)
Water capacity:	67 gal (253.6 L)
Electrical component	Pump: 120 V, 7.5 A, 60 Hz
rating:	Heated Surface: 120 V, 1.1 A, 60 Hz, 65
-	W
Pump speed:	Single
Minimum flat for door:	1-15/16" (49 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.



1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 3-12-2020 07:48 - US/CA