

Walraven VibraTek® SA-3 Silent Absorber

(L2 05 54)

silent rubber absorber for isolating metal to metal contact




2801100300



2801100450

Свойства и преимущества

- formed of two rubber parts which fit into each other, making it suitable for various fixing plate thicknesses
- ideal isolation of HVAC equipment
- for use with M8 threaded rods
- a versatile viscoelastic two-piece rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- prevents transmission of vibration and noise

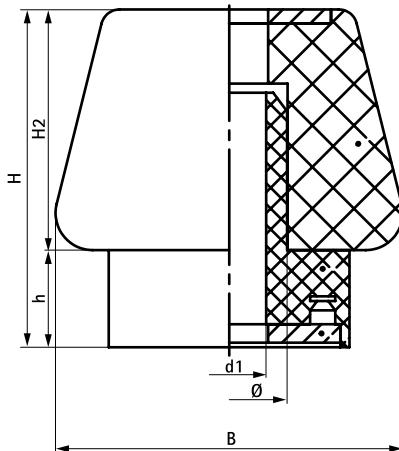

Арт. №	B (мм)	H (мм)	h (мм)	H2 (мм)	d1 (мм)	Ø (мм)	Цвет	Min. Load (Н)	Max. Load (Н)	Min. Optimal Load (Н)	Max. Optimal Load (Н)	Max. Deflection (мм)	Уп.мин
2801100300	37,5	36,5	10,5	26	Ø 8	12,5	Grey + green	5	300	5	200	7,0	150
2801100450	37,5	36,5	10,5	26	Ø 8	12,5	Black + green	10	450	10	400	7,0	150