


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

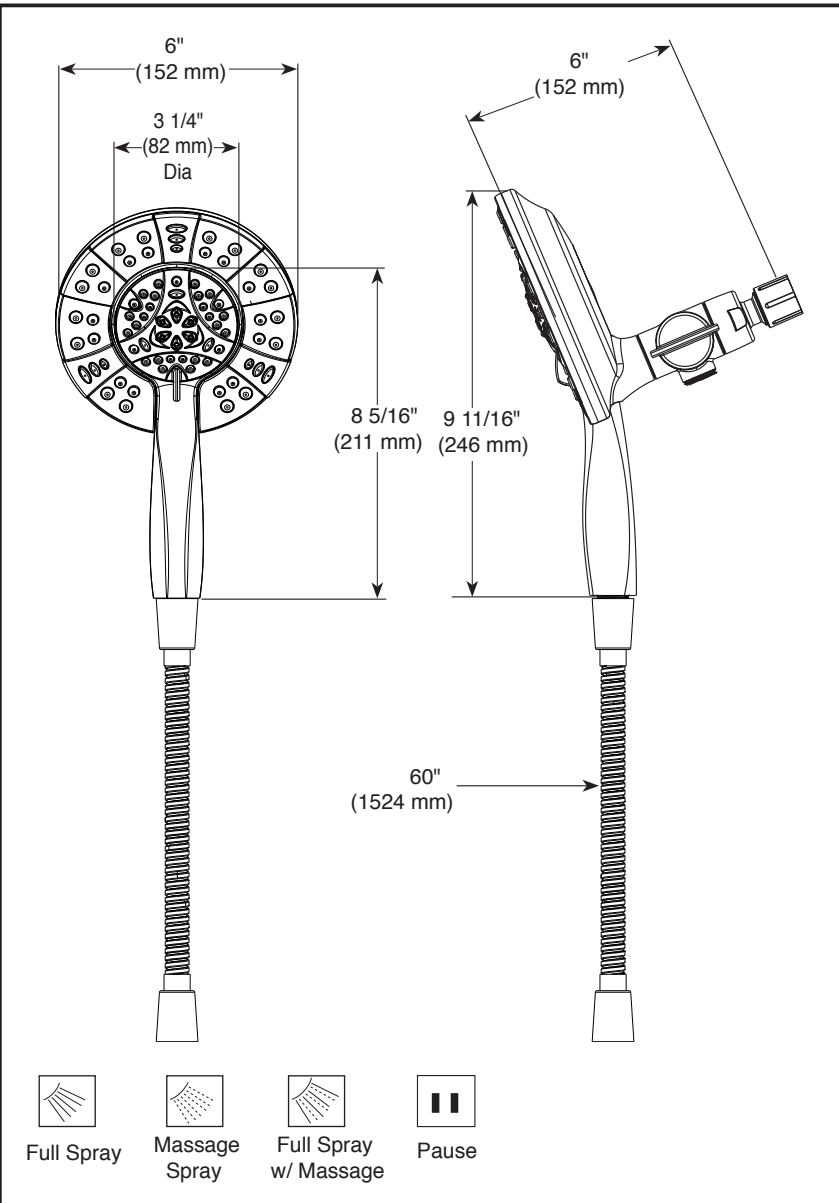

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-B-75499 Rev. A



- 2-In-1 shower
- 4-Spray Setting hand shower

**FEATURES:**

- Touch-Clean® Nozzles

**STANDARD SPECIFICATIONS:**

- Maximum flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550kPa.
- Integrated hand shower docks securely into showerhead when not in use.
- Diverter allows for single or shared operation of showerhead and hand shower.
- Fixed showerhead and hand shower all in one.
- 60" (1524 mm) Stainless steel hose.
- Multiple hand shower spray settings and pause feature - not a positive shut-off.
- Ball connector swivel angle is 35°. (17.5° per side)

**WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

**COMPLIES WITH**

- ASME A112.18.1 / CSA B125.1



55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
 © 2017 Masco Corporation of Indiana