

# built-in

High flow 6way built-in part  
**W21069CR**

## TECHNICAL INFORMATION

Concealed part of 6 ways high flow thermostatic. CHROME

### Flow rate:

p (bar)	0,5	1	1,5	2	2,5	3
<b>Q1 (l-min)</b>	18	24	27,5	30	31,5	33
<b>Q2 (l-min)</b>	20	26,5	30	33,5	36,5	39
<b>Q3 (l-min)</b>	20,5	27	30,5	34	37,5	40
<b>Q4 (l-min)</b>	21	27,5	31	34,5	38	40
<b>Q5 (l-min)</b>	21	27,5	31	34,5	38	40
<b>Q6 (l-min)</b>	21	28	31	35	38	41

Qn = portata 1-2-3-4-5-6 uscite / 1-2-3-4-5-6 outlet flow rate

## PICTURE



## SPARE PARTS



ORIC007




ORIC010  
T°

## FEATURES



Easy installation

## TECHNICAL DRAWING

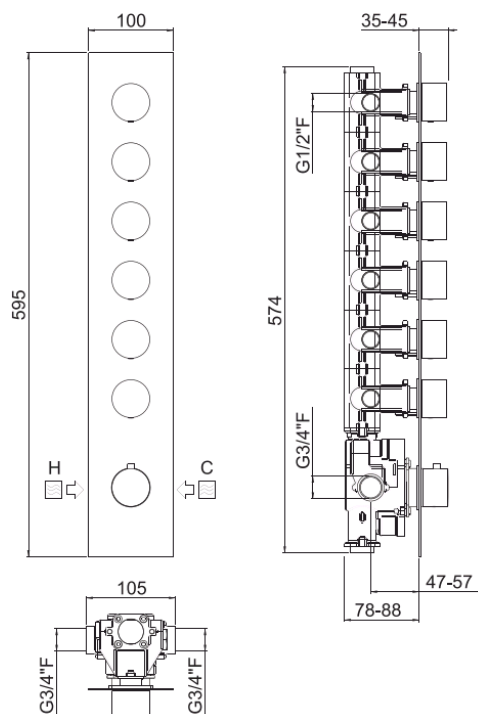

## FINISHINGS

