

Hand shower set with integrated shower holder - Dark Chrome

IMO

27 802 970



Fits: IMO, MEM, CL.1, CYO

- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- with anti-scale system
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- rosette 60 x 60 mm
- 1/2" connection
- WRAS 1912049

Intrinsic protection against back flow.

	Dark Chrome	27 802 970-19
	Chrome	27 802 970-00
	Chrome	27 802 970-00 0010
	Brushed Platinum	27 802 970-06 0010
	Brushed Platinum	27 802 970-06
	Platinum	27 802 970-08 0010
	Platinum	27 802 970-08
	Dark Chrome	27 802 970-19 0010
	Brushed Light Gold	27 802 970-27
	Brushed Light Gold	27 802 970-27 0010
	Brushed Durabass (23kt Gold)	27 802 970-28 0010
	Brushed Durabass (23kt Gold)	27 802 970-28
	Matte Black	27 802 970-33
	Matte Black	27 802 970-33 0010
	Brushed Champagne (22kt Gold)	27 802 970-46 0010
	Brushed Champagne (22kt Gold)	27 802 970-46
	Champagne (22kt Gold)	27 802 970-47
	Champagne (22kt Gold)	27 802 970-47 0010
	Brushed Chrome	27 802 970-93
	Brushed Chrome	27 802 970-93 0010
	Brushed Dark Platinum	27 802 970-99 0010
	Brushed Dark Platinum	27 802 970-99

27 802 970

Recommended miscellaneous




Concealed wall elbow -

- max. recess depth 163 mm
- min. recess depth 90 mm

35 085 970 90

27 802 970

mm [inches]

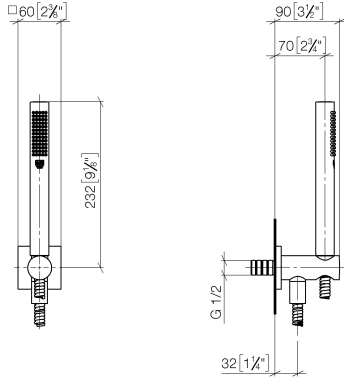

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen




Hand shower set with integrated shower holder - Dark Chrome

IMO

27 802 970

Certificates

LGA_29

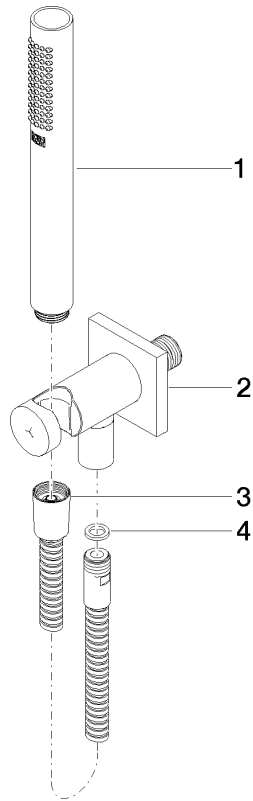



Hand shower set with integrated shower holder - Dark Chrome

IMO

27 802 970

Spare parts list