

### Features

- Freestanding design creates a striking focal point in your bathing area.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- End drain.
- Coordinates with other products in the Archer collection.

### Material

- Acrylic.

### Installation

- Freestanding.
- End ledge allows for deck-mounting capabilities for faucets.

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Products/Accessories

K-24916 Wireless Music Kit

K-23726 Drain treatment

K-23732 Tub & shower cleaner



### Codes/Standards






CSA B45.5/IAPMO Z124

### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.



### Available Colors/Finishes

*Color tiles intended for reference only.*



| Color  | Code | Description |
|--|------|-------------|
|  | 0    | White       |
|  | 96   | Biscuit     |
|  | 47   | Almond      |
|  | NY   | Dune        |
|  | G9   | Sandbar     |

No change in measurements if connected with drain illustrated. (K-7272)

 Recommended Faucet Location

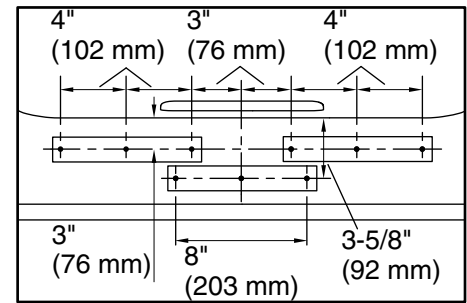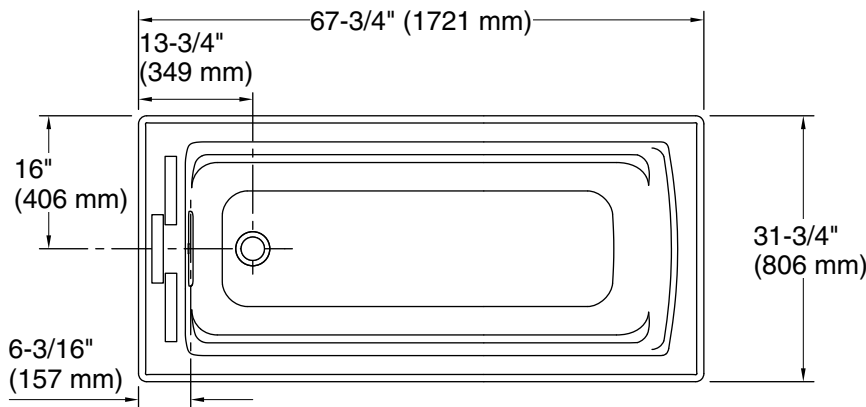

Recommended Faucet Hole Location

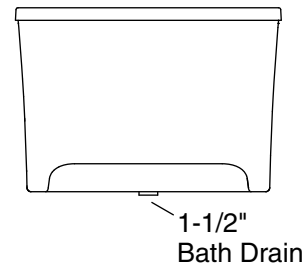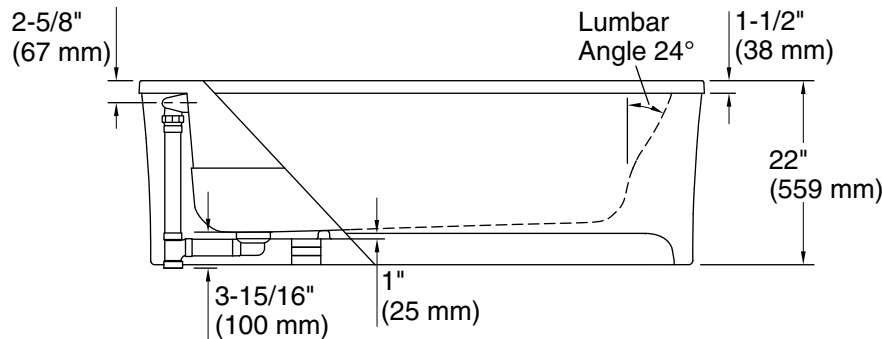

### Technical Information

All product dimensions are nominal.

|                     |   |
|---------------------|---|
| Installation:       | Freestanding  |
| Drain location:     | End   |
| Basin area, bottom: | 51-1/16" x 19-11/16" (1297 mm x 500 mm)             |
| Basin area, top:    | 58-9/16" x 25-5/16" (1487 mm x 643 mm)              |
| Weight:             | 95 lbs (43.1 kg)                                    |
| Minimum floor load: | 43.8 lbs/ft <sup>2</sup> (213.9 kg/m <sup>2</sup> ) |
| Water depth:        | 15-1/16" (383 mm)                                   |
| Water capacity:     | 65 gal (246.1 L)                                    |
| Template:           | Footprint, 1265461, not required, not included      |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for freestanding installation only.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.