



# SPY collection






# wall recessed

A very particular family of recess to wall: Spy is present there but not visible. The purity of its geometrical shape makes Spy a visually lightweight product, which does not draw attention, but can be very elegant as soon as it is perceived. When on, Spy provides with marked and enveloping light. The rigorous cleanliness of design is enhanced by the total absence of visible screws. The body, in transparent polycarbonate, accommodates the glass diffuser which is available in several colours. Spy can be used for mounting on concrete or drywall surfaces, both indoor and outdoor.

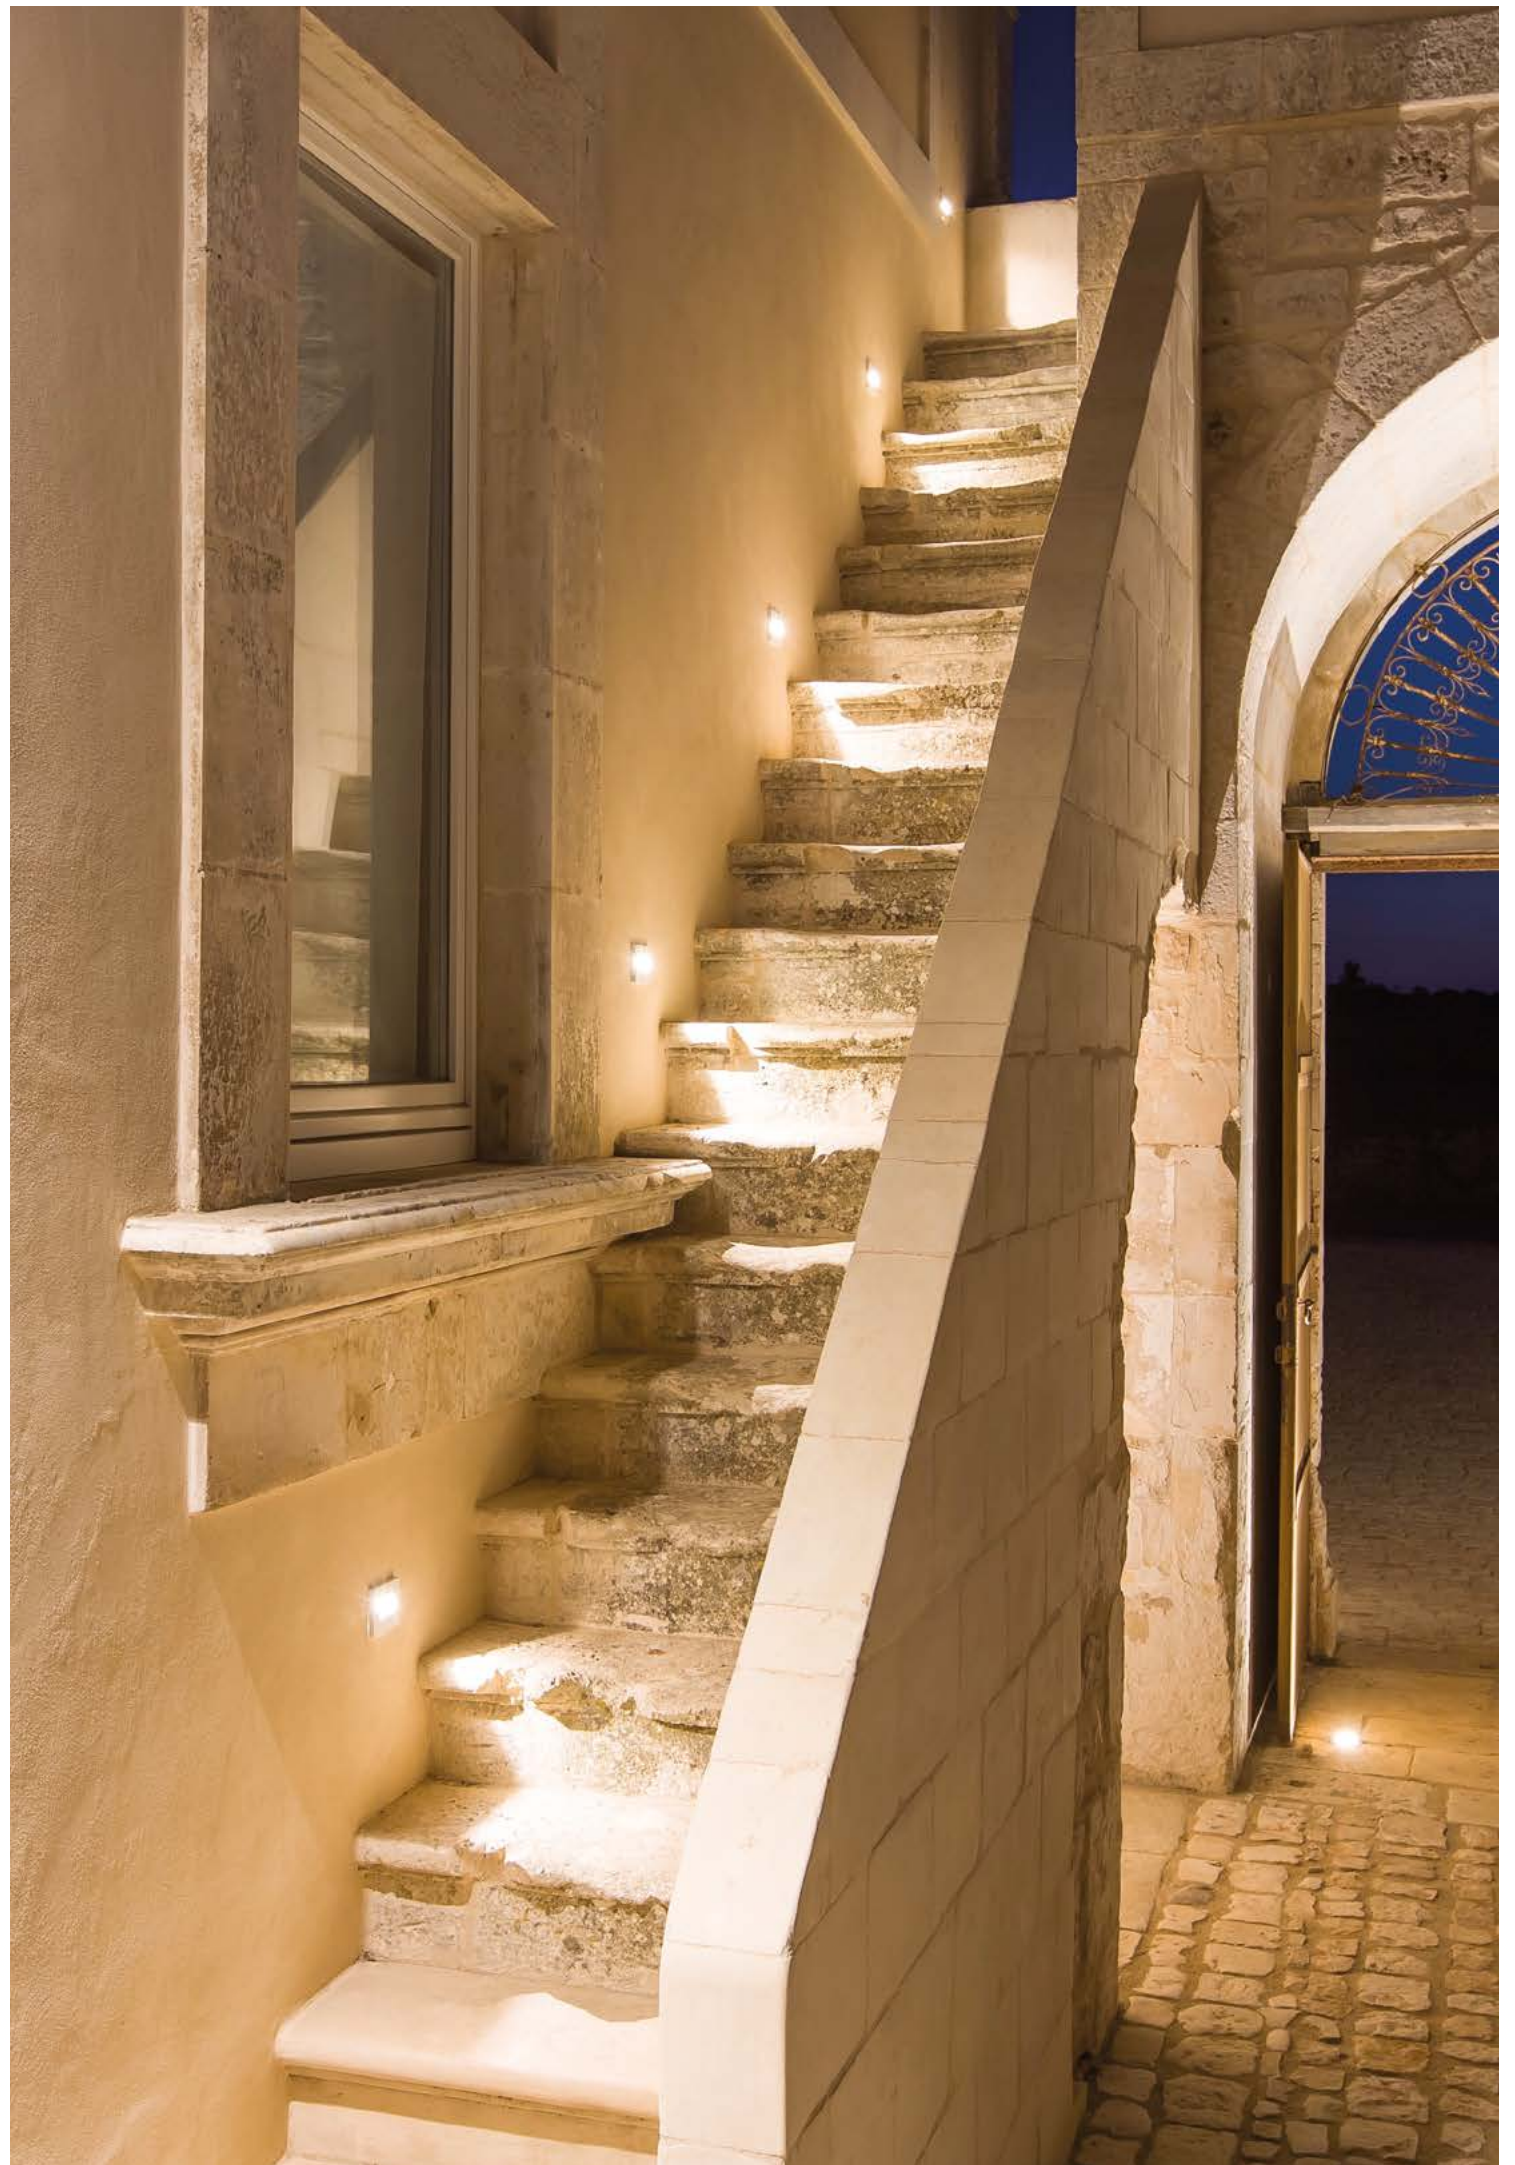

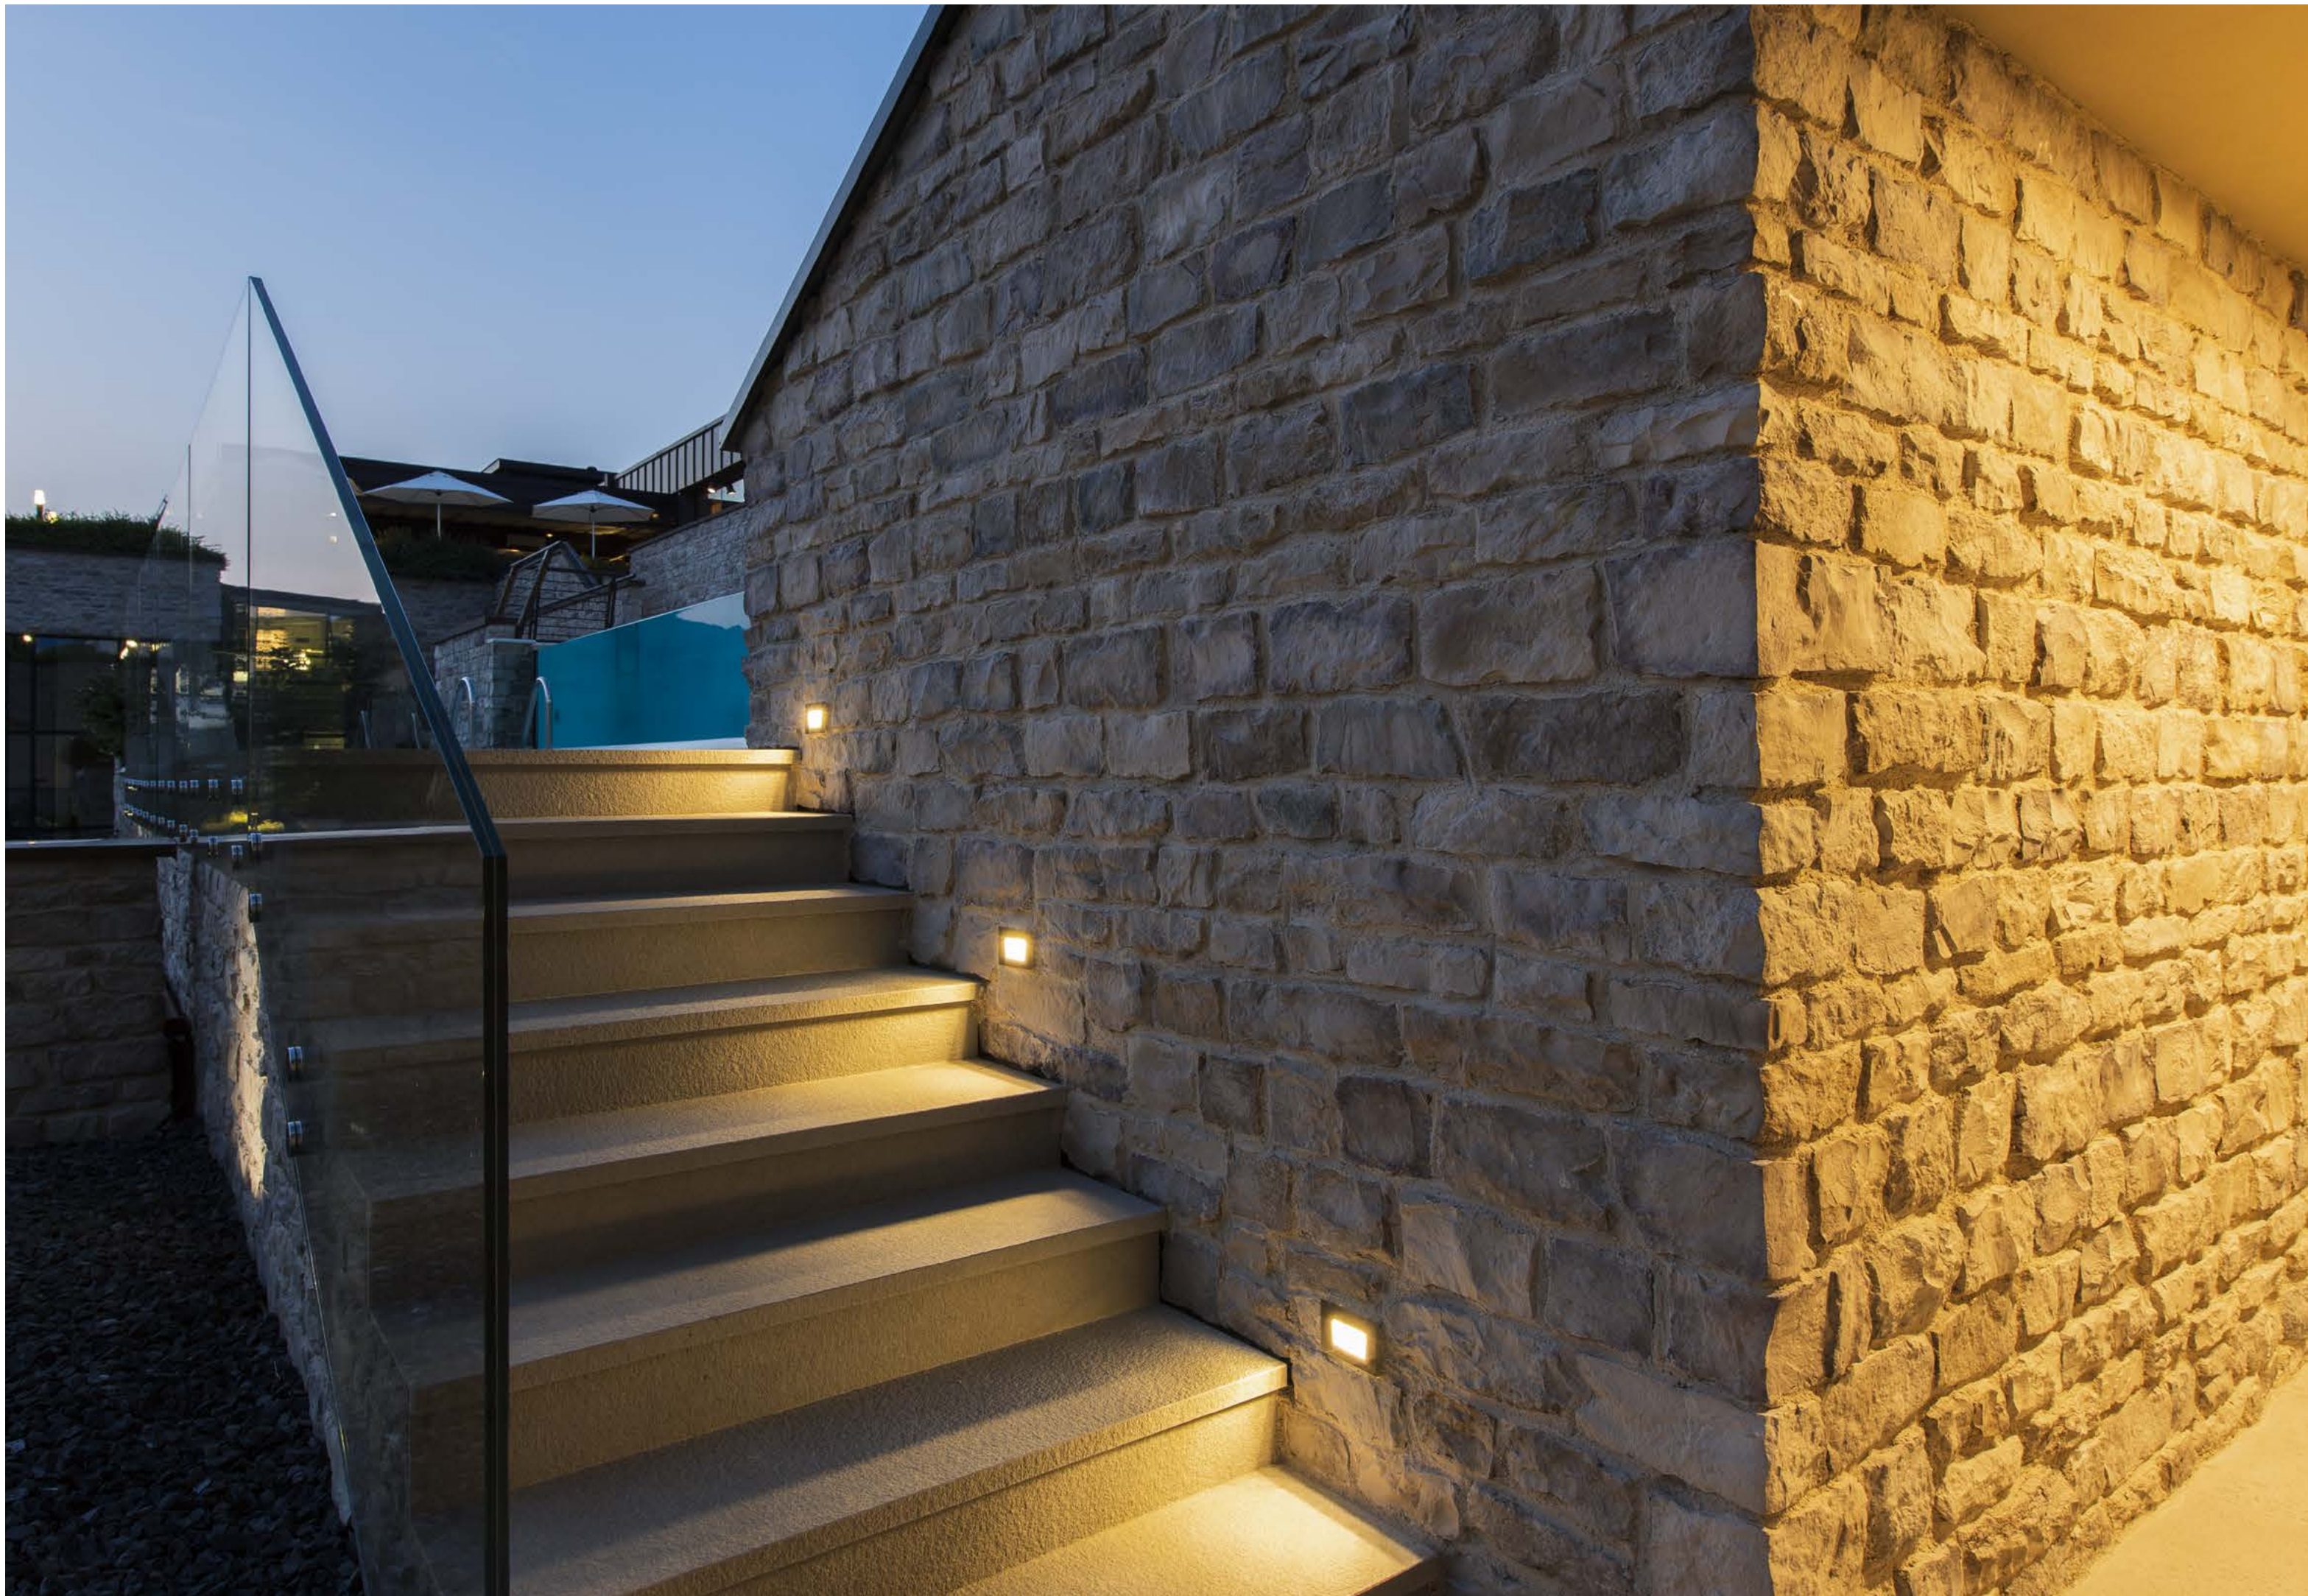

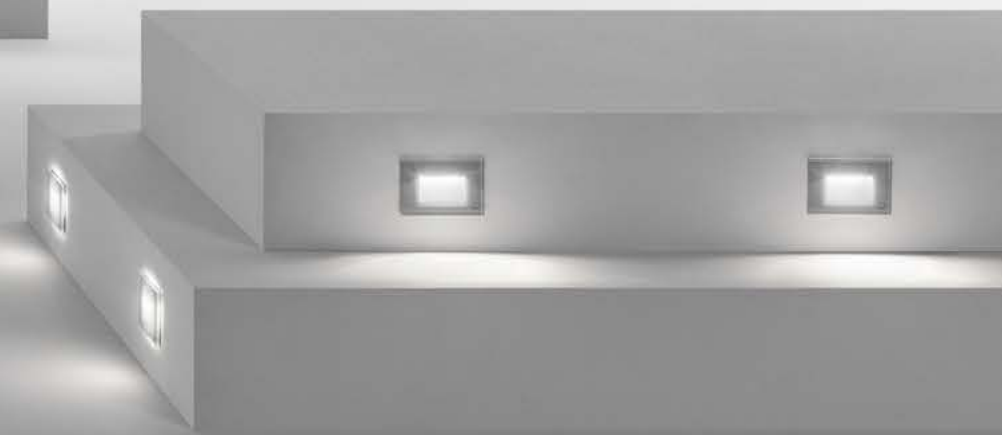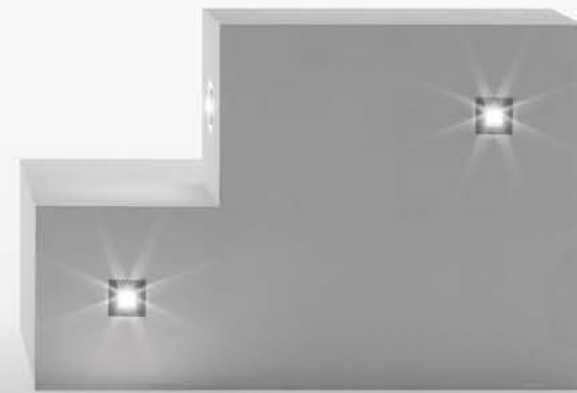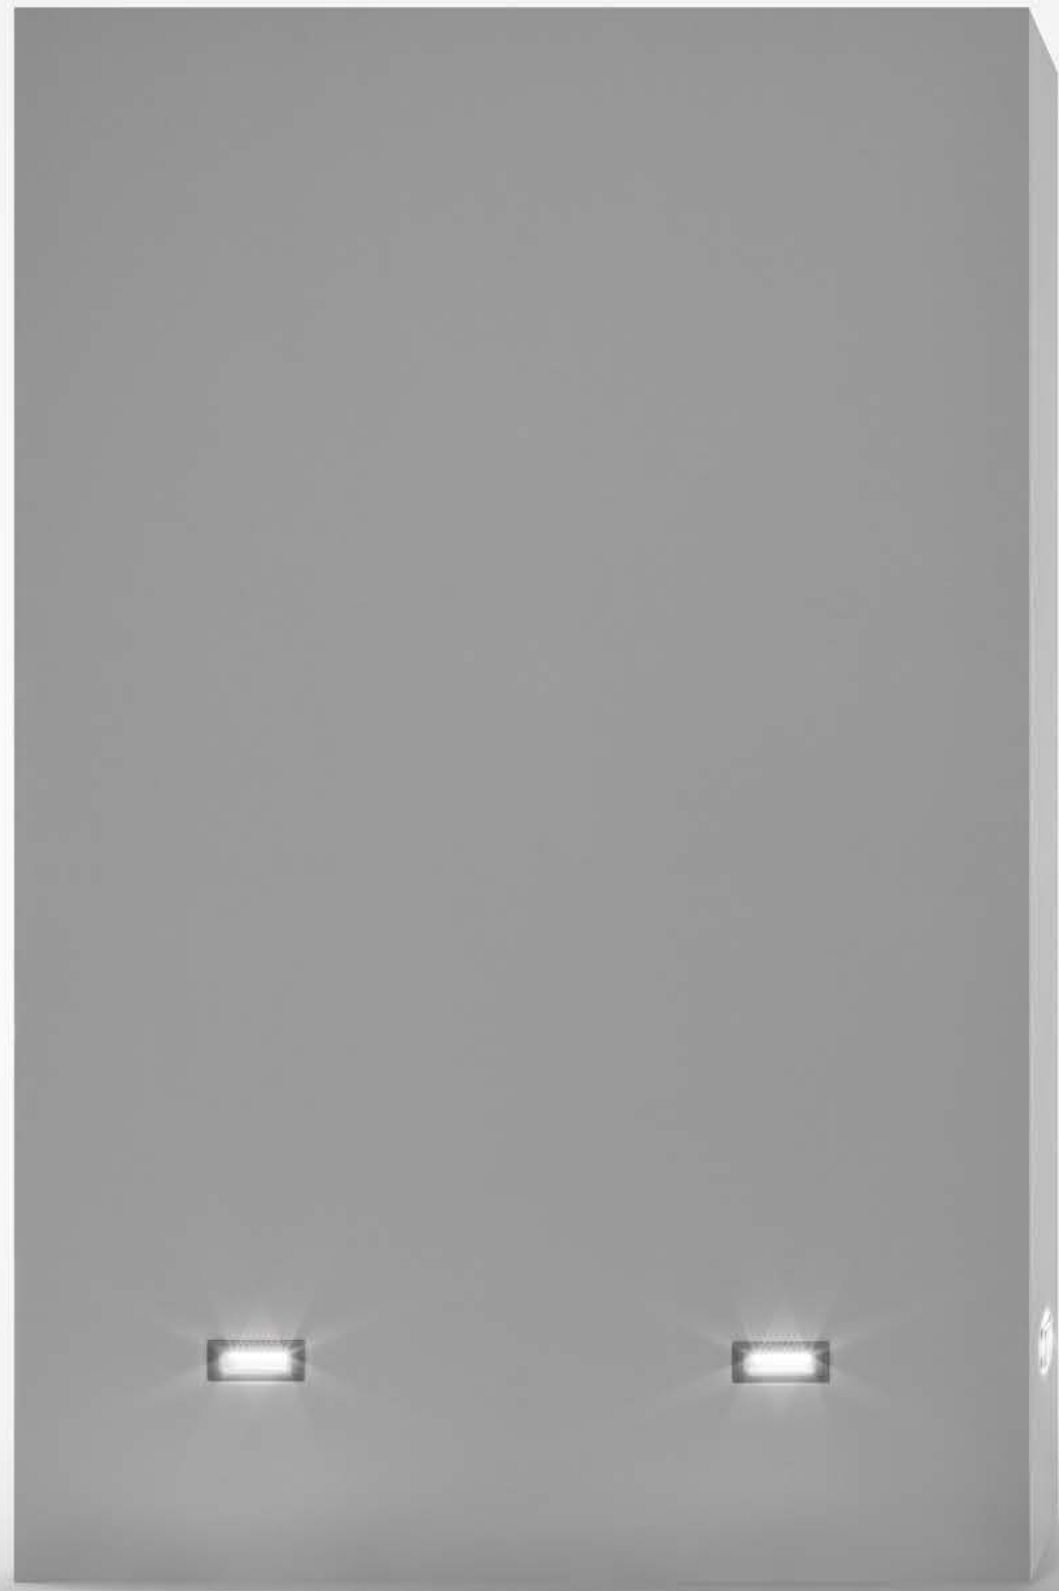

# collection




wall recessed

IP66  
IK 05

5 mm extra clear glass  
transparent / sandblasted

80 x 80 mm  
120 x 80 mm  
190 x 80 mm


0,15 m cable length  
IP67 connector included



# wall recessed



80 x 80 mm  
120 x 80 mm  
190 x 80 mm



## WHITE LED

3000K CRI>80  
220-240V 50/60Hz ⊕

2700K / 4000K  
available on request

### → small



3,8W | 25 lm (\*)  
asymmetrical  
transparent glass



790 cd/klm

### → medium



6W | 130 lm (\*)  
asymmetrical  
transparent glass



710 cd/klm

### → large



8W | 150 lm (\*)  
asymmetrical  
transparent glass



710 cd/klm

## WHITE LED

3000K CRI>80  
220-240V 50/60Hz ⊕

2700K / 4000K  
available on request

### → small



3,8W | 10 lm (\*)  
diffuse  
sandblasted glass



320 cd/klm

### → medium



6W | 50 lm (\*)  
diffuse  
sandblasted glass



320 cd/klm

### → large



8W | 60 lm (\*)  
diffuse  
sandblasted glass



320 cd/klm

# details

Transparent UV-resistant polycarbonate body. Metallized polycarbonate reflector. Masonry outer casing included in the product. Tempered glass screen. No screws in the product. IP67 connector included. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

# standard finishes



(\*) Real Data