



## **Hood New Sky 100 inox 2522 100**

Hoods

Code: 2522 100



## **DETAILS**


Material	Stainless steel
Texture	Satin
Energy class	A+
Ceiling – false ceiling distance	min 200 mm / max 280 mm
Full description	New Sky 100 stainless - Ceiling suction hood
Grease filters	2 grease filters
Operation	Suction hood (filtering modality not available)
Cut out	
Air exhaust hole	230x80 mm



Motors	Brushless
Air flow rate	930mc/h
Motor power	85W
Hood type	Ceiling suction hood
Type of commands	Remote control
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
360° swiveling motor	Swiveling motors are flexible systems that allow an easy installation, in any situation.
Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
Perimetric aspiration	The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.
Remote control	The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.



## **TECHNICAL DATA**

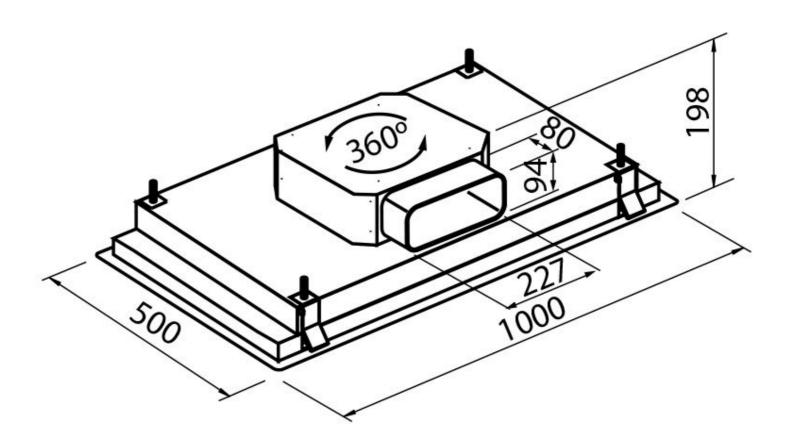

**OPTIONAL ACCESSORIES** 

## Foster ==



Active charcoal refill for Long Life filter 9700 904



Grid for plinth gray color 9700 539



Horizontal 15° Corner connector - rectangular section 9700 536



No-return valve 9700 538



Professional Long Life charcoal filter 9700 903



Rectangular/round adapter 9700 537



White connector - rectangular section 9700 533



White flexible tube with rectangular section 2541 000



White Horizontal 90° Corner connector - rectangular section 9700 534



White tube - rectangular section 9700 532



White Vertical 90° Corner connector - rectangular section 9700 535

