

.25

PTSH71

.25 4 1/4" Shower Head, Arm and Flange



SHOWN IN .25 4 1/4" SHOWER HEAD, ARM AND FLANGE | PTSH71

## TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray  
 Diameter of Head: 4 1/4"  
 Escutcheon Primary Material: Brass  
 Fittings Hole Diameter: 1 1/4"  
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5  
 Depth / Width: 12 1/8"  
 Height: 6 3/8"  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male NPT  
 Installation Type: Wall Mounted  
 Integrated Diverter: N  
 Length: 4 1/8"  
 Pivot: Y  
 Primary Material: Brass  
 Suggested Application: Bath  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 25.0 psi  
 Water Pressure Recommended: 45.0 psi

## INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

## CODES & STANDARDS

Code # PTSH71: ASME A112.18.1 / CSA B125.1, IAPMO, State of MA, CEC

## PRODUCT FEATURES

Clean lines and modern elegance define the .25 family

Customize your shower experience with a shower head, arm, and flange


Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.




.25

PTSH71


.25 4 1/4" Shower Head, Arm and Flange

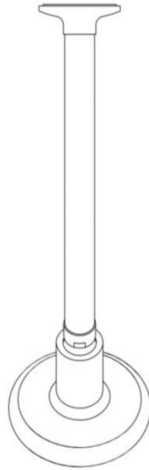

TOP VIEW SCALE: 3"=1'-0"

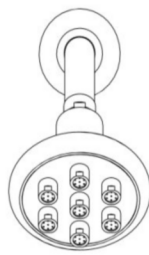

FRONT VIEW SCALE: 3"=1'-0"

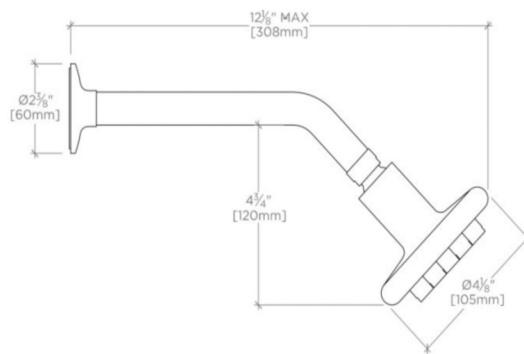

SIDE VIEW SCALE: 3"=1'-0"