



MICRO STEEL collection



recessed floodlight underwater

A range of recessed luminaires and projectors made in stainless steel. The projector has a shape which is soft and sinuous, slender in shape and with marked dimensional changes between body and diffuser. Its refined design creates a pleasant dynamism. It is also available a specific version for underwater use, equipped by watertight recessed box. Micro Steel, is a recessed fitting from formal perfection, with a geometrical design and minimum diameter and projections. Even Micro Steel can be used in immersion.

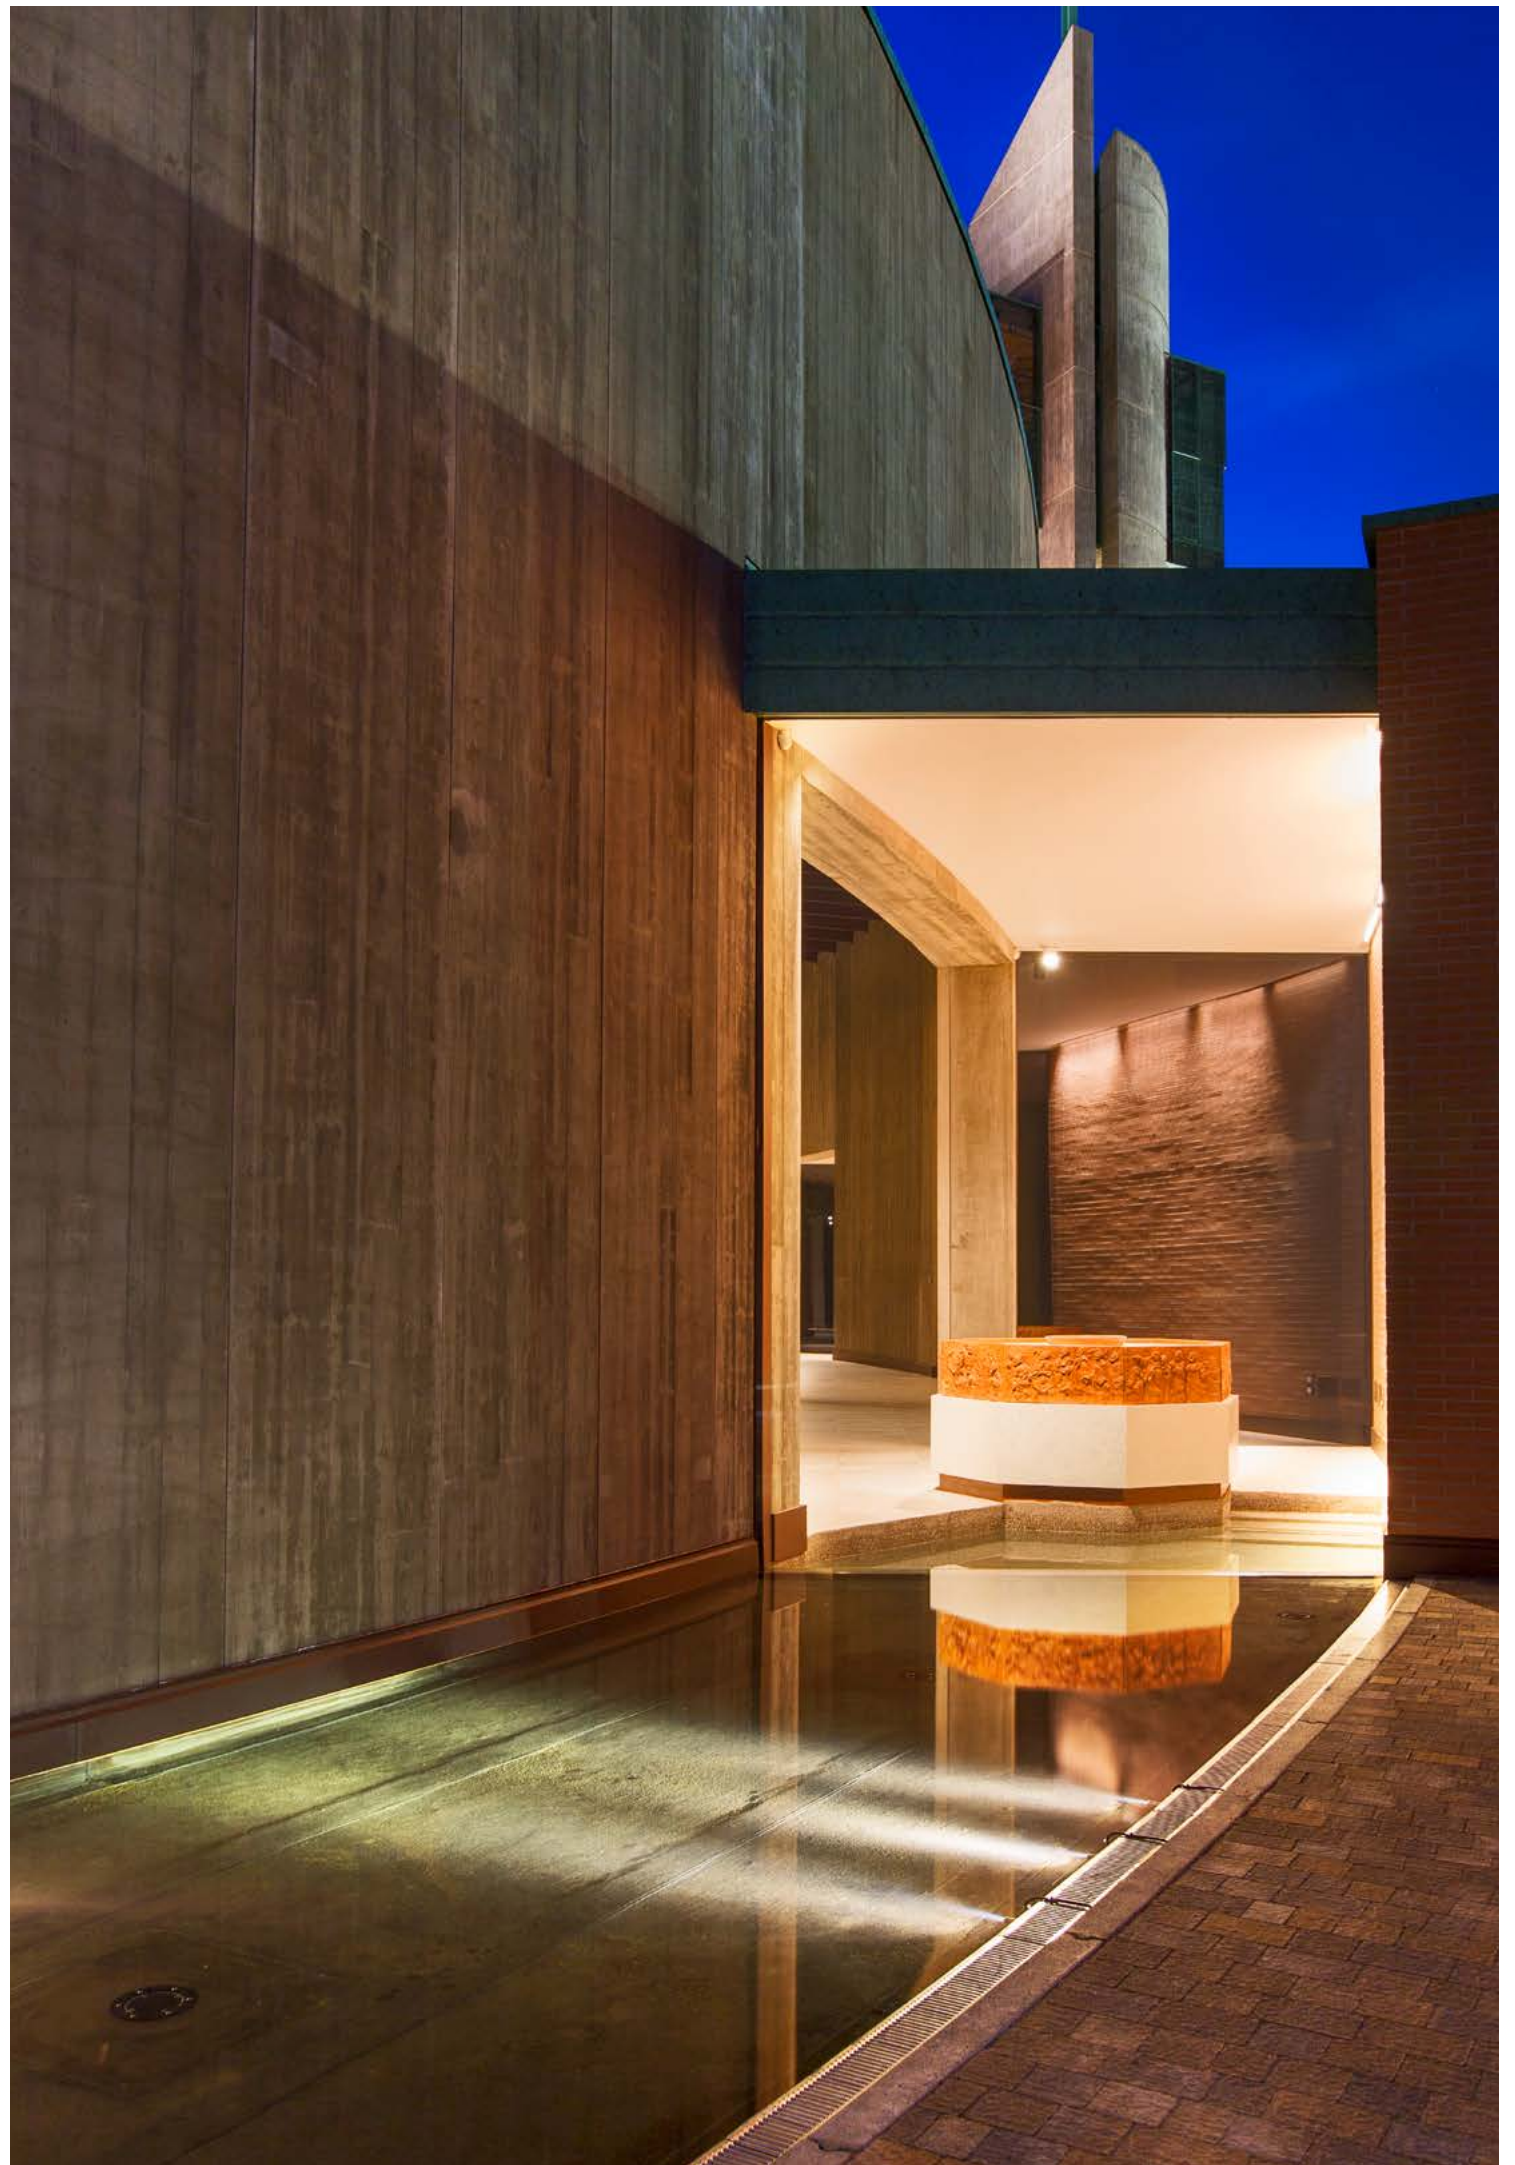

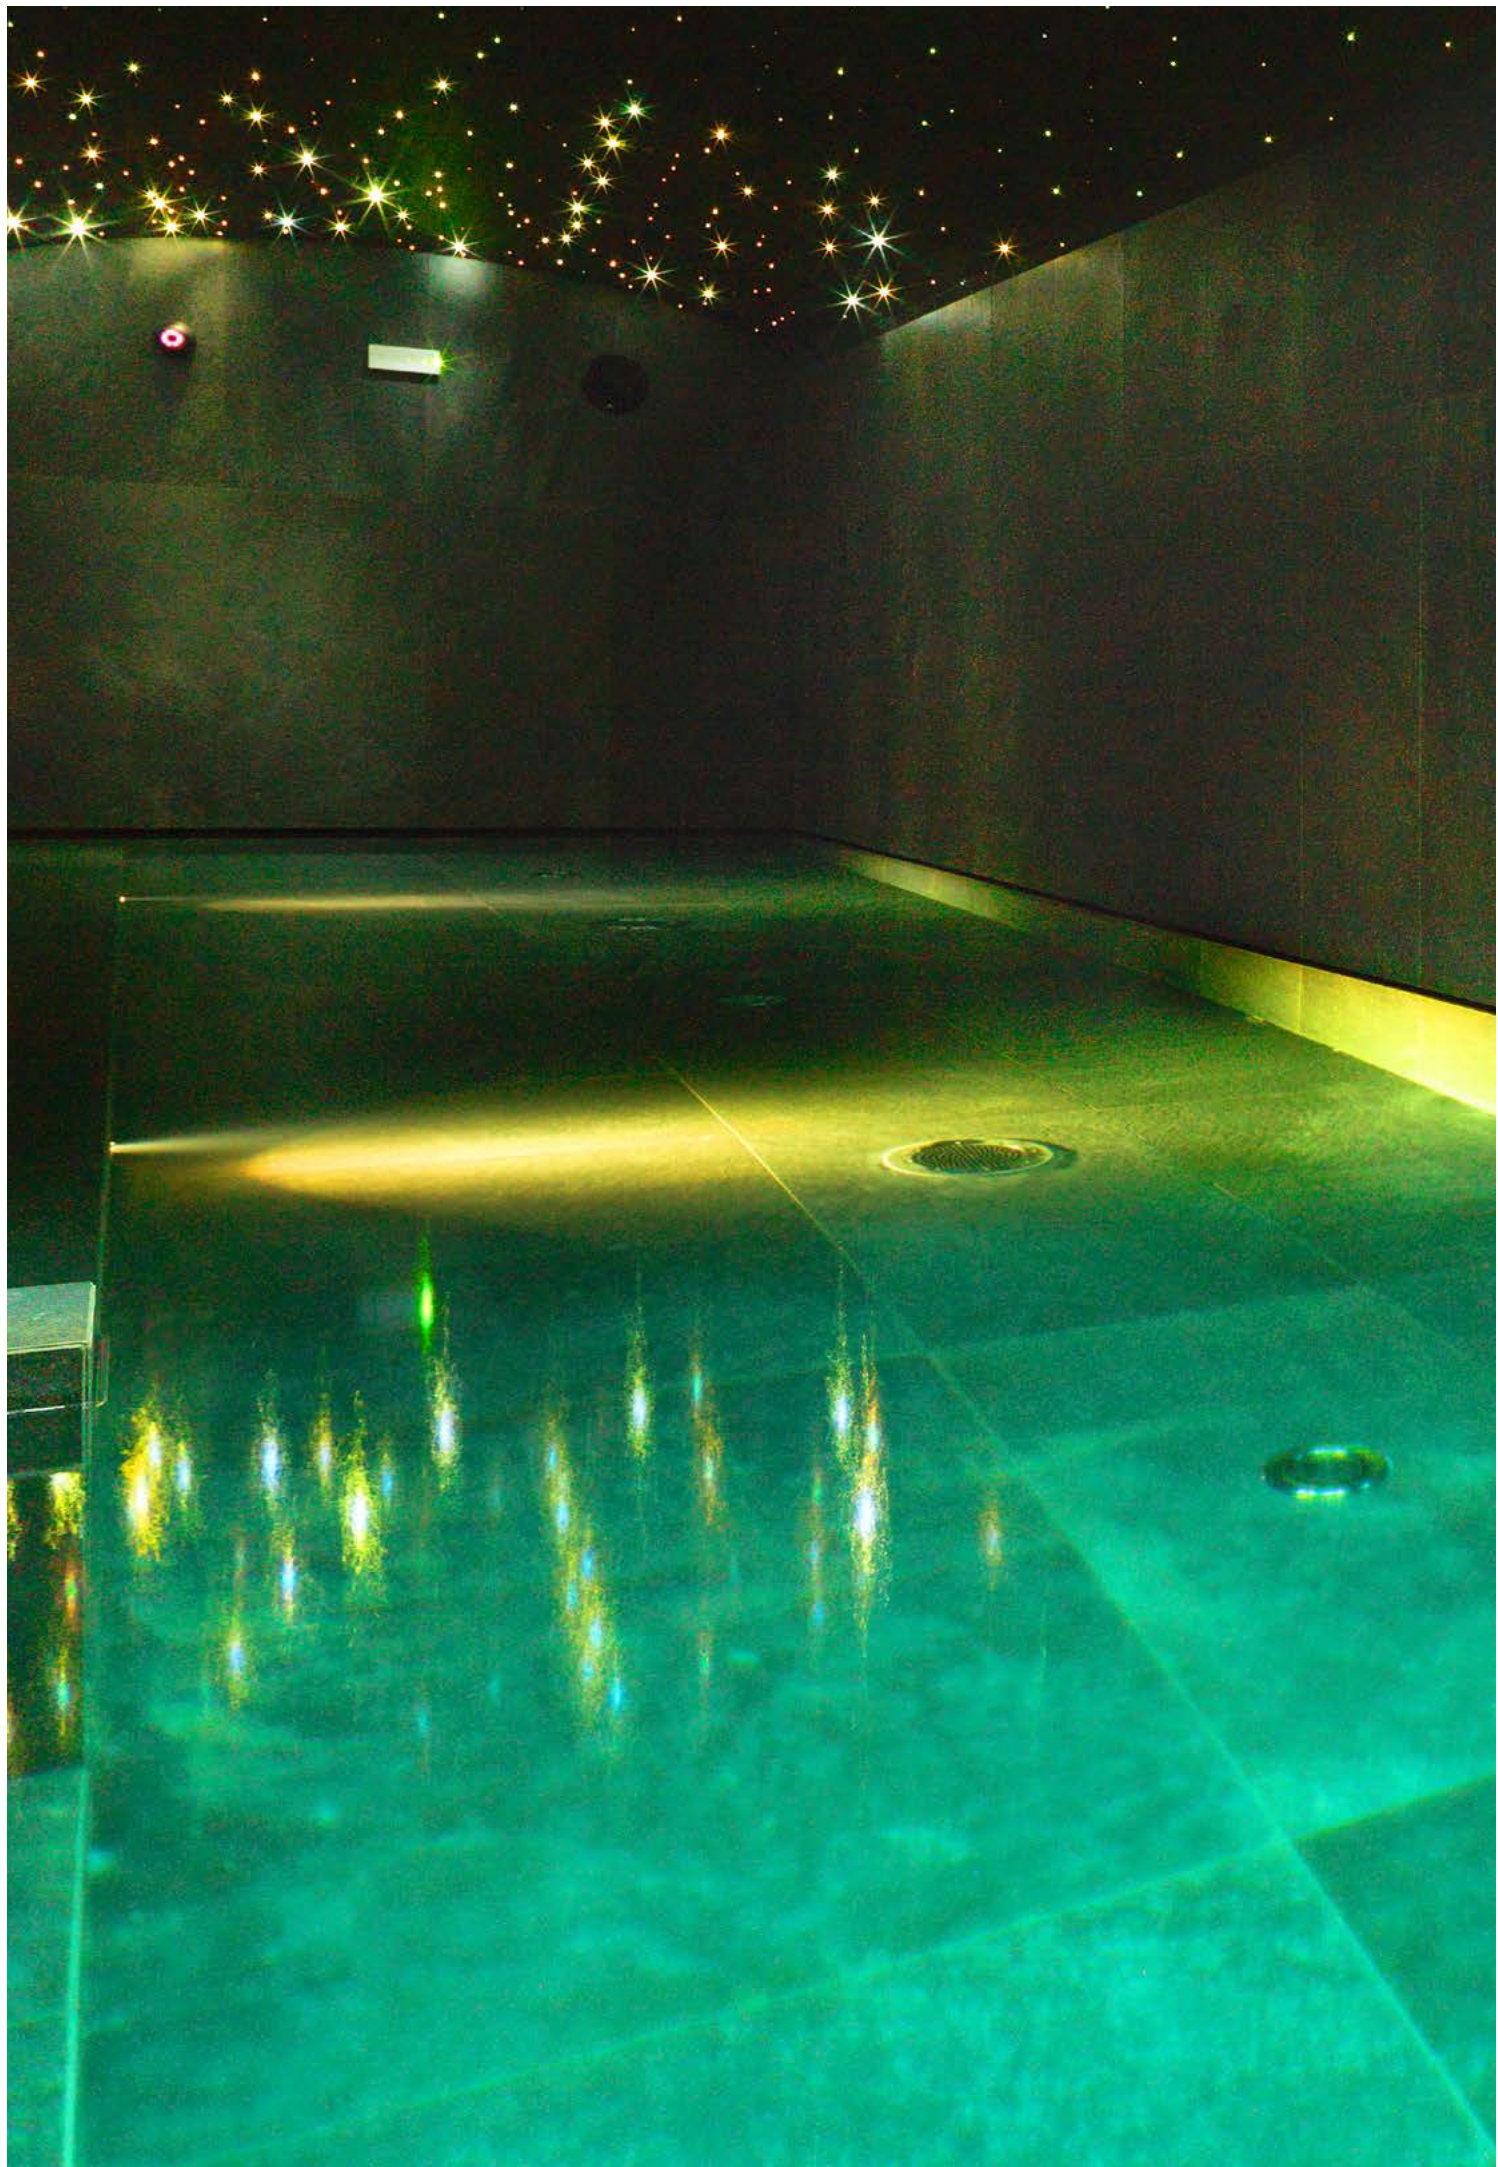

recessed underwater



floodlight underwater

collection



recessed
underwater

IP68 full dry (2m)
IK 10




floodlight
underwater

IP68 full dry (2m)
IK 10

8 mm extra-clear glass
sandblasted / transparent

cable length 5 m

ø 95 x 100 mm



8 mm extra-clear glass
sandblasted / transparent


cable length 5 m



recessed underwater



ø 95 x 100 mm



WHITE 3 LED

→ symmetrical

3000K CRI>80
24V DC

2700K / 4000K
available on request



5,9W 465 lm
transparent glass



5,9W 435 lm
transparent glass



5,9W 440 lm
transparent glass



spot
12°
12280 cd/klm



medium
33°
2555 cd/klm



large
44°
1685 cd/klm

RGBW 4 LED

→ symmetrical

RGBW (W) CRI>80
500 mA



5,8W
sandblasted glass
spot 12°



5,8W
sandblasted glass
medium 33°



5,8W
sandblasted glass
large 44°

floodlight underwater



WHITE 3 LED

→ symmetrical

3000K CRI>80
24V DC

2700K / 4000K
available on request



5,9W 465 lm
transparent glass



5,9W 435 lm
transparent glass



5,9W 440 lm
transparent glass



spot
12°
12280 cd/klm



medium
33°
2555 cd/klm



large
44°
1685 cd/klm

RGBW 4 LED

→ symmetrical

RGBW (W) CRI>80
500 mA



5,8W
sandblasted glass
spot 12°



5,8W
sandblasted glass
medium 33°



5,8W
sandblasted glass
large 44°

details

Body and closing flange made of AISI 316L stainless steel with electropolishing treatment. IP68 Degree of protection with Full Dry system which avoids condensing inside the product. External power supply with 24V constant-current transformer, to be wired in parallel.

(*) Real data