Features

- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding.
- Completes Stillness design solution with KOHLER fixtures and accessories.

Material

- Premium material construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Technology

- Rite-Temp® pressure-balancing technology maintains water temperature within +/-3 degrees Fahrenheit.

Required Products/Accessories

K-11748 Series Rite-Temp® Valves

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

88526 Thin Wall Trim Kit
1016154 Rite-Temp® Deep Rough-In

Codes/Standards

ASME A112.18.1/CSA B125.1

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

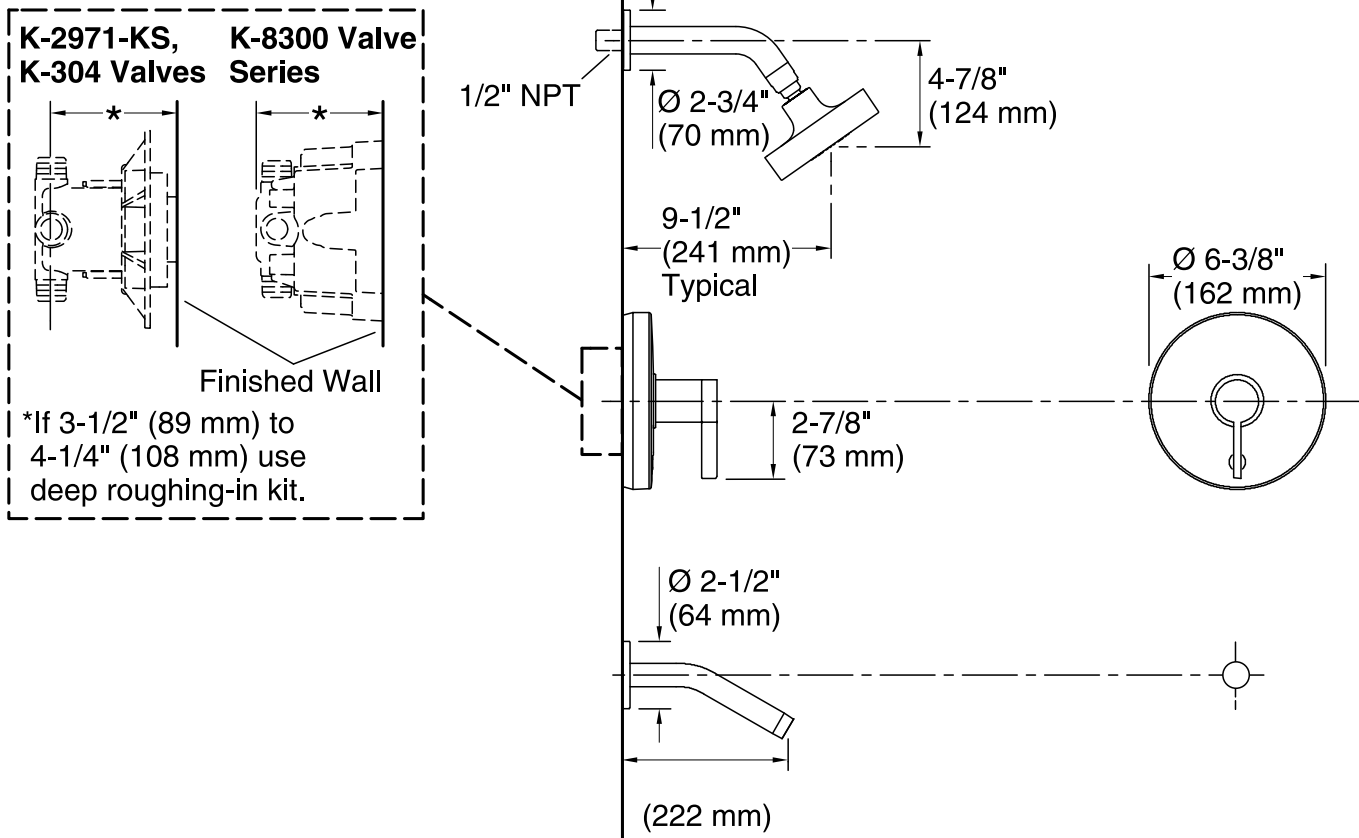| Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
3-22-2020 11:01 - US/CA/MX

THE BOLD LOOK
OF **KOHLER**®

K-2971-KS, K-304 Valves

K-8300 Valve Series

Finished Wall

*If 3-1/2" (89 mm) to 4-1/4" (108 mm) use deep roughing-in kit.

1/2" NPT

Ø 2-3/4" (70 mm)

4-7/8" (124 mm)

9-1/2" (241 mm) Typical

Ø 6-3/8" (162 mm)

2-7/8" (73 mm)

Ø 2-1/2" (64 mm)

(222 mm)

Technical Information

All product dimensions are nominal.

Valve body:	Cast brass
Drain included:	No

Notes

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Install this product according to the installation guide

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7 " (178 mm) to 18 " (457 mm) with single elbow between valve and wall-mount (457 mm) with single elbow between valve and wall-mount spout.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
3-22-2020 11:01 - US/CA/MX

THE BOLD LOOK OF KOHLER.