


R360

Sensor tap

The R360 electronic wall-mounted sensor tap has a 170mm long spout and is designed for an installation on a dry wall or panel with permanent access to the mounting tail/nut for servicing and/or repairs. Suitable for all types of sanitary facilities thanks to its multiple choice of finishes and its minimalist look.

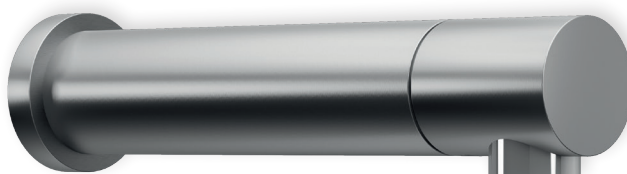

References	Power supply	Finishes
R360-S_SEC	Mains	Brushed stainless steel
R360-B_SEC	Mains	Chrome finish
R360-N_SEC	Mains	Matte black finish
R360-S_BAT	Battery	Brushed stainless steel
R360-B_BAT	Battery	Chrome finish
R360-N_BAT	Battery	Matte black finish

Characteristics

Finishes	Brushed stainless steel (S) / Chrome finish (B) / Matte black finish (N)
Dimensions	Ø38 x L170mm
Min/Max water inlet pressure	0.5 – 8 bars
Flow rate	3L/min (possibility of 1.3L/min, 1.89L/min or 6L/min)
Aerator	PCA spray (1.3L/min, 1.89L/min, 3L/min) – spray flow SSR PCA Stream (6L/min) – cascade flow
Sensor range	Sensor range Self-adjusting (adjustable with remote control)
Min. sensor range	35mm
Max. sensor range	300mm
Security time	90 seconds (Can be reduced with remote control)
Water inlet	1 water inlet for cold or pre-mixed water
Maximum temperature	70°C
Hygiene flush	24 hours after the last use (anti-bacterial)
Power supply	Adaptor 9V (_SEC) - cable length 5M Battery case IP67 (_BAT) - 6 x 1.5V battery - battery supplied
Length of cable from rear of tap	0.35M (possibility to add a cable extension)
Hose length	0.40M (possibility to order with 0.70M hose - minimum quantities required)
Warranty	10 years

Optional accessories

06001001	Power splitter with 2 outputs
06001002	Power splitter with 3 outputs
06009016	Electrical cable male-female extension 1 meter
06009021	Electrical cable male-female extension 3 meters
07100005	Remote control for electronic taps
08510012	Aerator 1.89L/min flow rate
08510054	Aerator 3L/min flow rate
08510034	Aerator 6L/min flow rate
06530013	Junction box 230/12V for connecting up to 10 taps
06000084	Output cable for junction box female connector

Installation info

Wall cut-out

The R360 is designed to be installed through a partition where there is a technical duct and/or permanent access to the mounting tail/nut for servicing and/or repairs. Drill a 23-24mm hole where you want to install the spout of the faucet, and a small M3 diameter hole just above in the centre line of the previous one for the anti-rotation pin (contact us for the cut-out plan: contact@duten.fr). It is always advisable to use thread lock when tightening the nut.

Water inlet

Flush the water supply lines thoroughly before installing the faucet. Do not allow dirt, teflon tape or metal particles to enter the faucet. Shut off water supply.

Planning of sanitary facilities

To avoid reflection problems, do not install the sensor directly opposite other faucet/soap dispenser sensors, other infrared devices or a reflective surface such as a stainless steel surface. The choice of other accessories must also be taken into consideration, such as the finish of the waste drain which may reflect light and interfere with the sensor. Particular care must also be taken in positioning the light in the room, especially with tap sensors that are directed downwards. A distance of at least 300mm should be maintained between the sensor and the bottom of the washbasin.

Maintenance

Never use products containing hydrochloric acid, formic acid, acetic acid or bleach containing chlorine. Never use abrasive products or tools (scouring liquid, scouring sponge, dish sponge, stainless steel ball, etc.). Use of any prohibited cleaning or maintenance products or substances could damage the surface of the tap. Only use soap and water when cleaning the surface of the taps and then wipe dry with a clean cloth or towel. When cleaning other areas of the washroom, the faucets should be protected from any splattering of the products that are used.

Certifications

ACS
 CE
 WRAS
 UPC
 WaterMark


Related products

Soap dispenser	S260
----------------	------

Related documents

Installation manuel	contact@duten.fr
Certifications	contact@duten.fr

Technical diagram - mains version

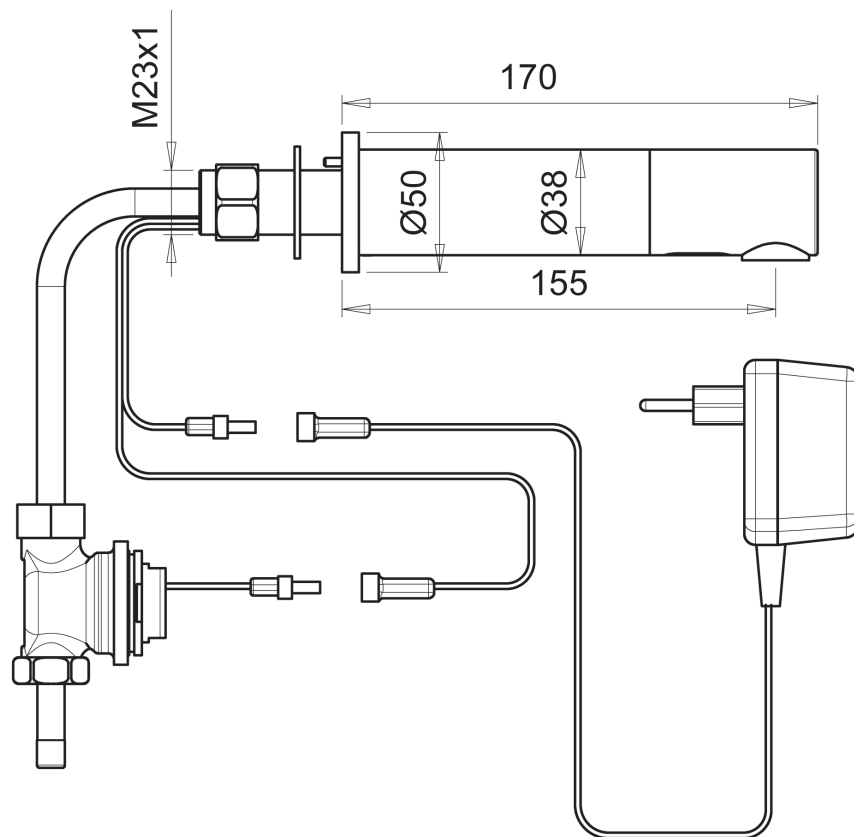

Technical diagram - battery version

