

# MOON collection




Lundbergdesign







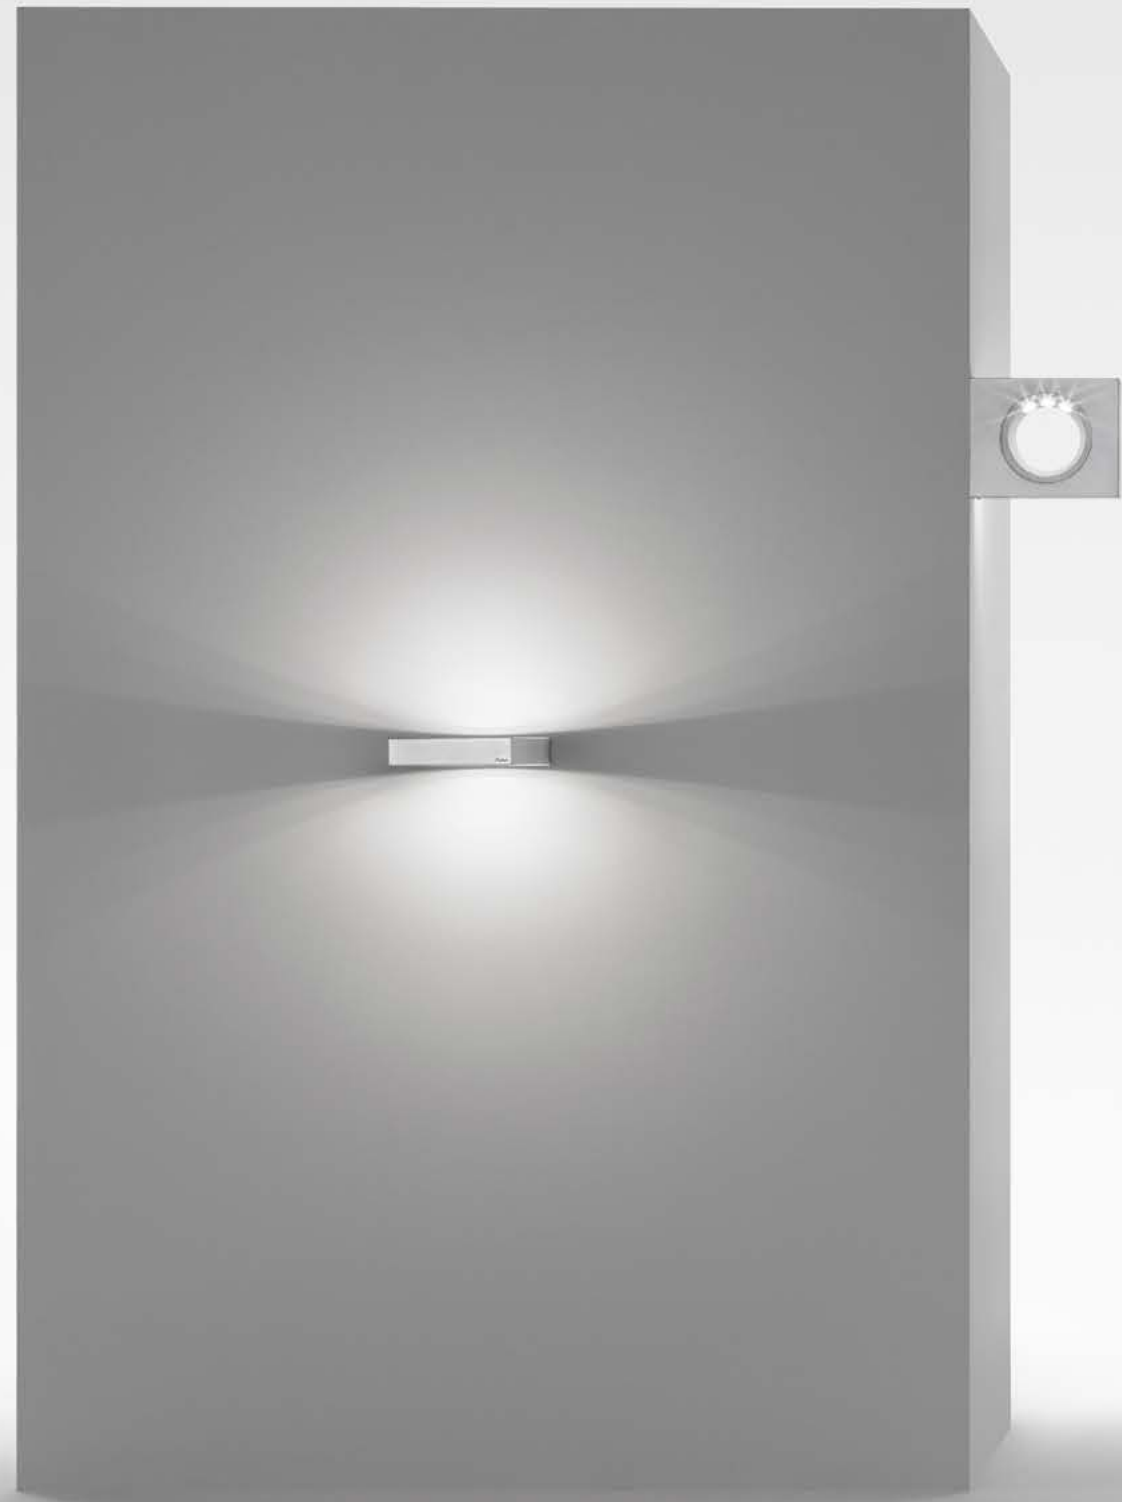



applique

IP65  
IK 05




vertical emission  
horizontal emission



bollard

IP66  
IK 05

h. 300 mm  
h. 800 mm  
h. 1100 mm



WHITE LED

3000K CRI>80  
220-240V 0/50/60 Hz

2700K / 4000K  
available on request

→ vertical



8W | 400 lm (\*)  
single emission  
asymmetrical



420 cd/klm

→ horizontal



8W | 400 lm (\*)  
single emission  
asymmetrical



420 cd/klm

→ vertical



14W | 775 lm (\*)  
double emission  
asymmetrical



320 cd/klm

→ horizontal



14W | 775 lm (\*)  
double emission  
asymmetrical




320 cd/klm

## bollard



h. 300 mm  
h. 800 mm  
h. 1100 mm



WHITE LED

3000K CRI>80  
220-240V 0/50/60Hz

2700K / 4000K  
available on request

→ h. 300 mm



8W | 400 lm (\*)  
single emission  
asymmetrical



420 cd/klm

→ h. 800 mm



8W | 400 lm (\*)  
single emission  
asymmetrical



420 cd/klm

→ h. 1100 mm



8W | 400 lm (\*)  
single emission  
asymmetrical



420 cd/klm

→ h. 300 mm



14W | 775 lm (\*)  
double emission  
asymmetrical



320 cd/klm

→ h. 800 mm



14W | 775 lm (\*)  
double emission  
asymmetrical



320 cd/klm

→ h. 1100 mm



14W | 775 lm (\*)  
double emission  
asymmetrical



320 cd/klm

## details

Extruded aluminium alloy body. Die-cast ring and base made of aluminium alloy with very low copper content. No visible screws and completely concealed wall attachment. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

## standard finishes

## on request finishes



.06 grey




.08 anthracite



.09 bronze



.01 black



.02 white



.07 corten

(\*) Real Data