

Shift® Square

Handshower, 2.0 gpm K-45203-GR

Features

- Multi-function handshower offers full-coverage and targeted massage spray settings.
- MasterClean[™] sprayface is easy-to-clean.
- Ergonomic design is comfortable and easy to grip.
- Contains flow-regulating check valve for backflow prevention.
- 2.0 gpm (7.6 l/min) maximum flow rate.
- Requires shower hose (sold separately).

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

Recommended Products/Accessories

K-23723 Faucet cleaner





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	СР	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel





Shift® Square

Handshower, 2.0 gpm K-45203-GR

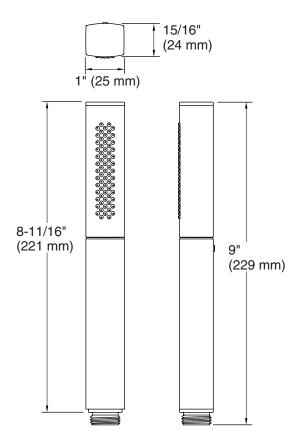

Technical Information

All product dimensions are nominal.

Drain included: No

Notes

For use with automatic compensating valves rated at 2.0 gal/min (7.6 l/min) or less.

Install this product according to the installation quide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

Note: Handshower contains flow regulating check valve for backflow prevention.

