

E75766



Collection: BRIVE

Finish*:



CP - Chrome

Main features:



Features

- MATERIAL: 54
- NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C2 A2 U3 - ACS : 15 ACC LY 472
- FLOW RATE: 21 l/min under 3 bar
- CONNECTION: With connectors and wall escutcheons
- HOLE CONFIGURATION: 150 ± 15
- INSTALLATION TYPE: Wall-mount
- DIVERTER: Automatic diverter with locking feature
- Non-return valve on shower outlet

- INSTALLATION TYPE: Wall-mount
- TYPE: Single-lever
- SPOUT PROJECTION: 150 - 163
- MECHANISM: Ceramic disc cartridge
- WATER/ENERGY-SAVING: WATER-SAVING
- NON-RETURN VALVE: Yes
- MECHANISM GUARANTEE: 5 years

Consumer benefits

- Temperature limiter ring
- Water savings: Sensitive flow control.
- Automatic diverter with locking feature, practical in case of low water pressure


Installation benefits

- Connectors and wall escutcheons.

Required products

- E14320: Shower set
- E14321: Shower set

Technical drawing

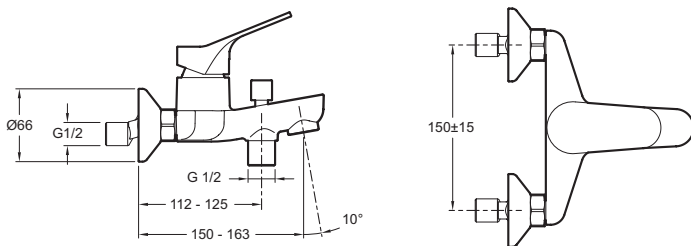

Product Specification: Single-lever wall bath/shower mixer. E75766. Collection: BRIVE. MATERIAL: 54. INSTALLATION TYPE: Wall-mount. NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C2 A2 U3 - ACS : 15 ACC LY 472. TYPE: Single-lever. FLOW RATE: 21 l/min under 3 bar. SPOUT PROJECTION: 150 - 163. CONNECTION: With connectors and wall escutcheons. MECHANISM: Ceramic disc cartridge. HOLE CONFIGURATION: 150 ± 15. WATER/ENERGY-SAVING: WATER-SAVING. INSTALLATION TYPE: Wall-mount. NON-RETURN VALVE: Yes. DIVERTER: Automatic diverter with locking feature. MECHANISM GUARANTEE: 5 years. Non-return valve on shower outlet.

*Due to possible variations in computer and printer calibrations, technical factors and certain finish characteristics, the colors you see may not accurately portray the actual colors and are provided as a guide only.