

# **Underscore® Rectangle**

5' VibrAcoustic® Bath K-1168-VBC

#### **Features**

- VibrAcoustic calms and soothes with sound vibration technology.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Four original instrumental compositions offer different levels of relaxation.
- Syncs with devices enabled with BLUETOOTH® wireless technology including smartphones, MP3 players, tablets, and laptops located up to 33 feet away.\*
- Customize your experience with the high-resolution color touch screen
- Fully-adjustable volume above and below the water.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Clearflo slotted overflow for deep soaking.
- Includes 25 feet of wiring and amplifier.

### Material

Acrylic.

# **Hydrotherapy**

- VibrAcoustic.
- Chromatherapy.

#### Installation

- Drop-in or undermount.
- Requires 110V electrical service.

## **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

#### Recommended Products/Accessories

1184460 Undermount installation kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-590 5' under-mount installation kit K-1177 Vinyl Tiling-in Bead K-23726 Drain treatment K-23732 Tub & shower cleaner



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

# KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	33	Mexican Sand™
	K4	Cashmere





12-5/8"

(321 mm)

\*10"

(254 mm)

4-1/8

(105 mm)

16"

(406 mm)


2-1/4"

(57 mm)

# **Underscore® Rectangle**

5' VibrAcoustic® Bath K-1168-VBC

No change in measurement if connected with drain illustrated. (K-7272)

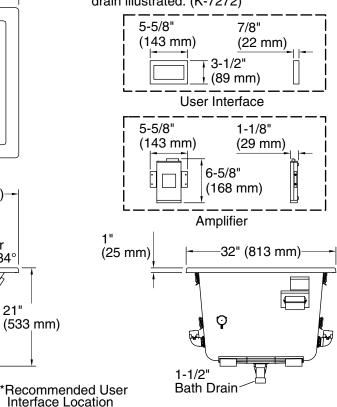



One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

60" (1524 mm)

\*24" (610 mm)-

Q

8

1/2" (13 mm)

Lumbar

Angle 34°

(533 mm)

Amplifier: 120 V, 15 A, 50/60 Hz

9

#### **Technical Information**

All product dimensions are nominal.

Drop-in, Under-mount Installation:

Drain location: End

42" x 23-1/2" (1067 mm x 597 mm) Basin area, bottom: 55-1/8" x 27-1/8" (1400 mm x 689 mm) Basin area, top:

85 lbs (38.6 kg) Weight:

Minimum floor load: 58.6 lbs/ft<sup>2</sup> (286.1 kg/m<sup>2</sup>)

17-1/8" (435 mm) Water depth: 81 gal (306.6 L) Water capacity:

Cutout: Drop-in, 59-1/2" x 31-1/2" (1511 mm x

800 mm)

Electrical component Amplifier: 120 V, 1.1 A, 50/60 Hz

rating:

Amplifier channels: 2 at 15 W per channel

2 at 30 W per channel

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

Kit is required for under-mount installations (sold separately).

Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

