

Exhale® B120 Multi-Function Handshower, 2.0 gpm K-72595

Features

- Handshower features transitional design, inspired by nature.
- Advanced spray engine provides four spray experiences: full coverage, drenching rain, intense massage and soft silk spray.
- Full-coverage spray produces an encompassing spray for everyday use and utilizes Katalyst[®] air induction to create large, full drops.
- Drenching rain delivers a soothing circular water pattern.
- Intense massage spray targets sore muscles to ease away aches and pains.
- Soft silk spray releases a dense, luxurious downpour of water.
- Full 360-degree rotation of entire sprayface cycles through spray functions.
- Silicone sprayface is easy to clean.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose

- or
 - K-9514 60" Shower Hose

or

- K-45981 72" ribbon hose
- or

K-45982 60" ribbon hose

Recommended Products/Accessories

K-23723 Faucet cleaner





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description




- CP Polished Chrome
- SN Vibrant® Polished Nickel
- BN Vibrant® Brushed Nickel




Exhale® B120

KOHLER. Faucets

Multi-Function Handshower, 2.0 gpm K-72595

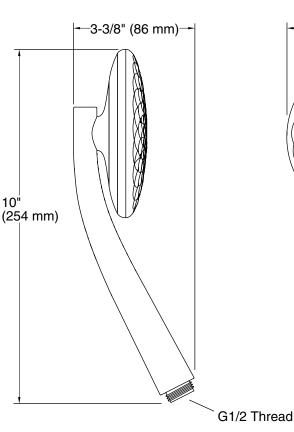

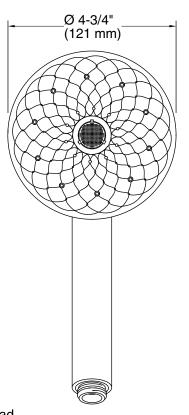

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

Notes

Install this product according to the installation guide.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.

