

BOND

BLS330

Bond Solo Series Wall Mounted Lavatory Faucet with Single Knob Handle



TECHNICAL DETAILS

ADA Compliance: Yes
 Control Valve Rough-in Depth Maximum: 5 1/4"
 Control Valve Rough-in Depth Minimum: 2 3/4"
 Drain Depth Maximum: 2 5/8"
 Drain Hole Diameter: 1 3/4"
 Drain Style: Push Touch
 Drain Depth Minimum: 3/8"
 Fittings Hole Diameter: 1 3/8"
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female NPT
 Number of Holes: Two Hole
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.2 gpm
 Spout Swivel: N
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern bath designs infused with rare soul and artistry. Explore a range of statement-making elements: fittings, washstands, mirrors and more.

PRODUCT FEATURES

Knob Handle

Includes European size push touch drain

Features Plateable Knob Handle

Stocked in Chrome, Nickel, Brass and Dark Nickel


Available in 1.2gpm (4.5L/min) flow rate; Requires rough valve, sold separately: GULV29

WATERWORKS


BOND

BLS330


Bond Solo Series Wall Mounted Lavatory Faucet with Single Knob Handle

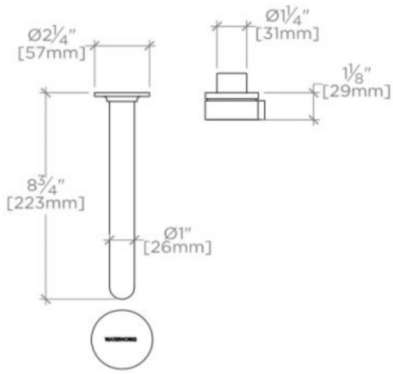

TOP VIEW SCALE: $1\frac{1}{2}"=1'-0"$

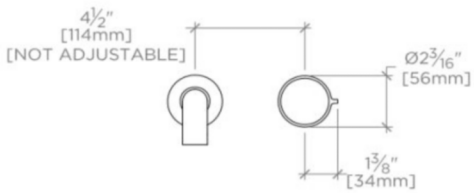

FRONT VIEW SCALE: $1\frac{1}{2}"=1'-0"$

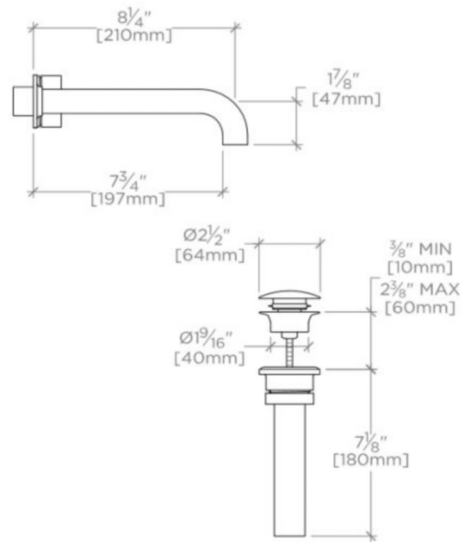

SIDE VIEW SCALE: $1\frac{1}{2}"=1'-0"$