DECORATIVE OUTDOOR LIGHTING

applique bollard



A family of bollards in three heights. Very simple design, the products Chiodo can be used both hidden inside the bushes, or in view. In the first case it highlights the lighting capacity, generating an intense light particularly suitable for scenic lighting of gardens or large vases with flowers and greenery. In the second case it can create magical compositions by using elements of different heights, such as small forests of pure light. Chiodo can be fixed in the ground by its spike, or on the floor through a small base. The product is available also in the applique version, which radiates the wall with a soft light and creates a unique and suggestive atmosphere. Chiodo applique can be used in different combinations, that give life to original lighting effects.




DECORATIVE OUTDOOR LIGHTING


CHIODO collection



DECORATIVE OUTDOOR LIGHTING



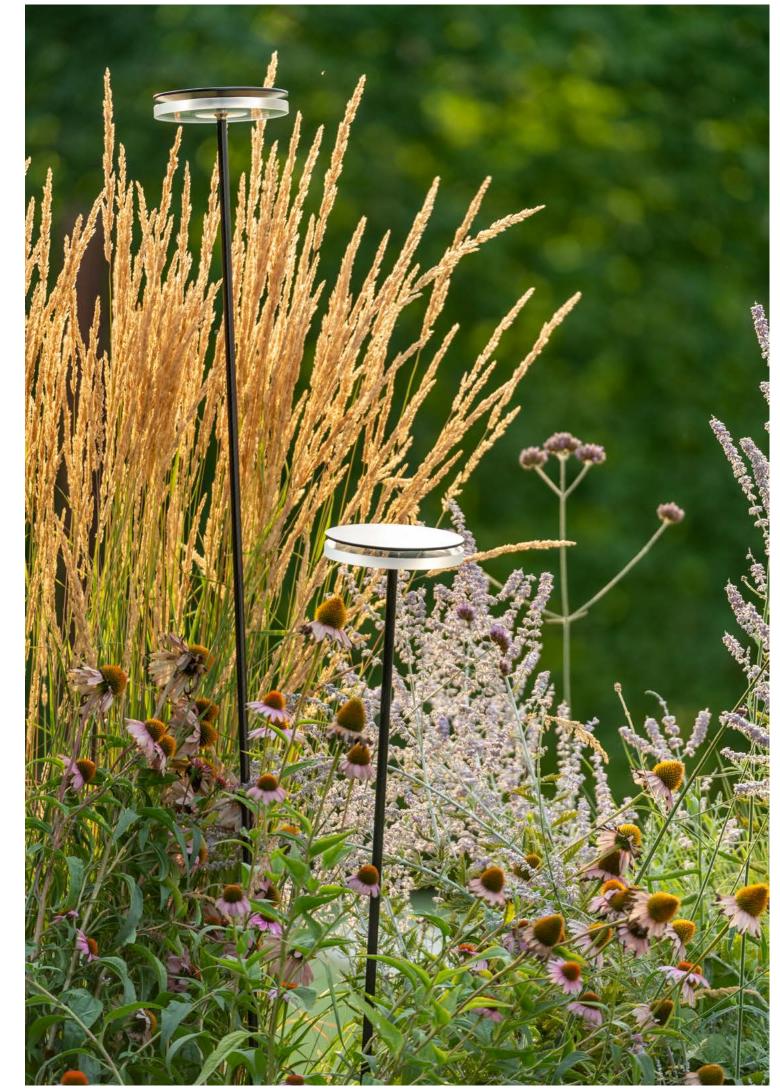

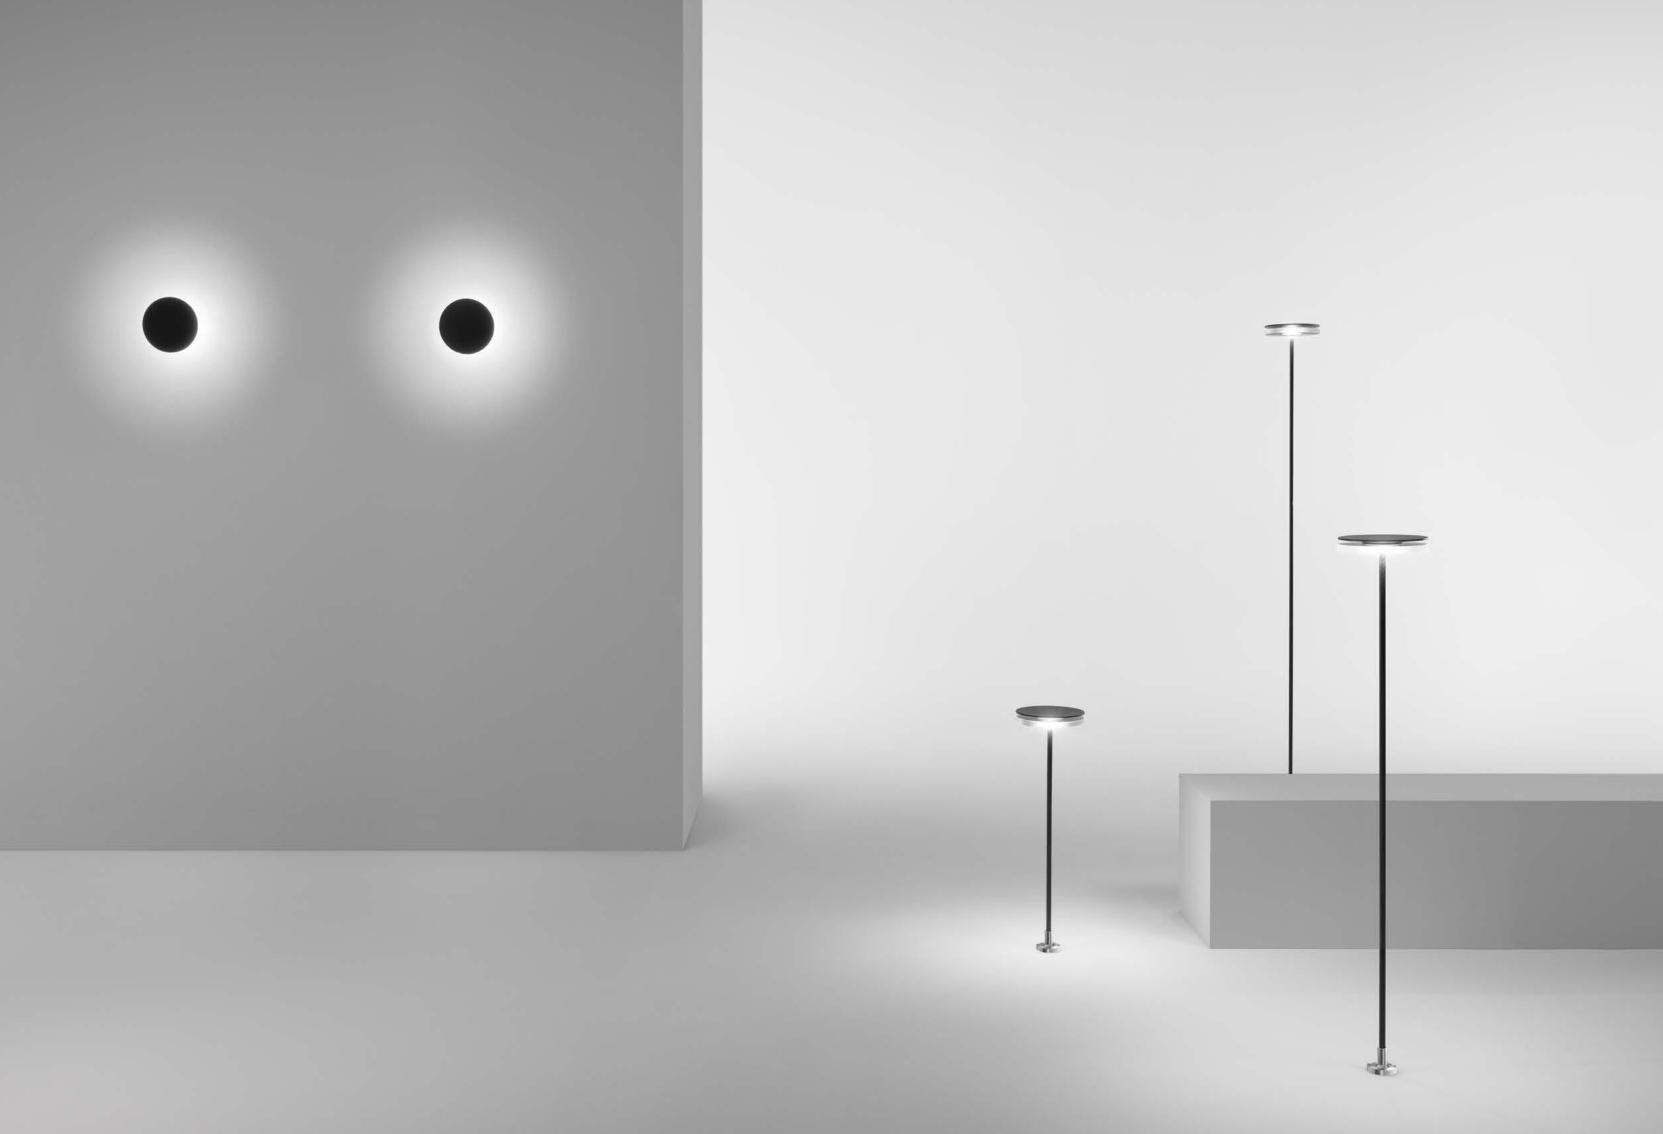

UPDATE

collection



applique

IP65 IK 05

15 mm methacrylate frosted diffuser

ø 180 × h. 90 mm






bollard with spike

IP65 IK 05

> 15 mm methacrylate frosted diffuser

ø 180 × h. 605 mm ø 180 × h. 1105 mm ø 180 × h. 1705 mm



bollard with base plate IP65 IK 05

15 mm methacrylate frosted diffuser

ø 180 × h. 605 mm ø 180 × h. 1105 mm ø 180 × h. 1705 mm



details

.01 black

Aluminum coated carbon fibre finish rod. Spike for ground fixing in AISI 316 stainless steel. PMMA opal diffuser screen. No visible screws. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray.

applique finishes



bollard finishes



applique





WHITE COB LED

3000K CRI>80 220-240V 50/60Hz 🕀

2700K / 4000K available on request



12W | 340 lm (*) diffuse



121° 260 cd/klm


bollard



h. 600 mm 4,4 m cable length

h. 1100 mm 3,9 m cable length

h. 1700 mm 3,3 m cable length



→ ø 180 × h. 1700 mm

WHITE COB LED

3000K CRI>80 220-240V 50/60Hz 🕀

2700K / 4000K available on request → ø 180 × h. 600 mm

12W | 595 lm (*) diffuse

400 cd/klm



12W | 595 lm (*) diffuse



12W | 595 lm (*) diffuse



→ ø 180 × h. 1100 mm

400 cd/klm

(*) Real Data

DECORATIVE OUTDOOR LIGHTING