


# SLIM





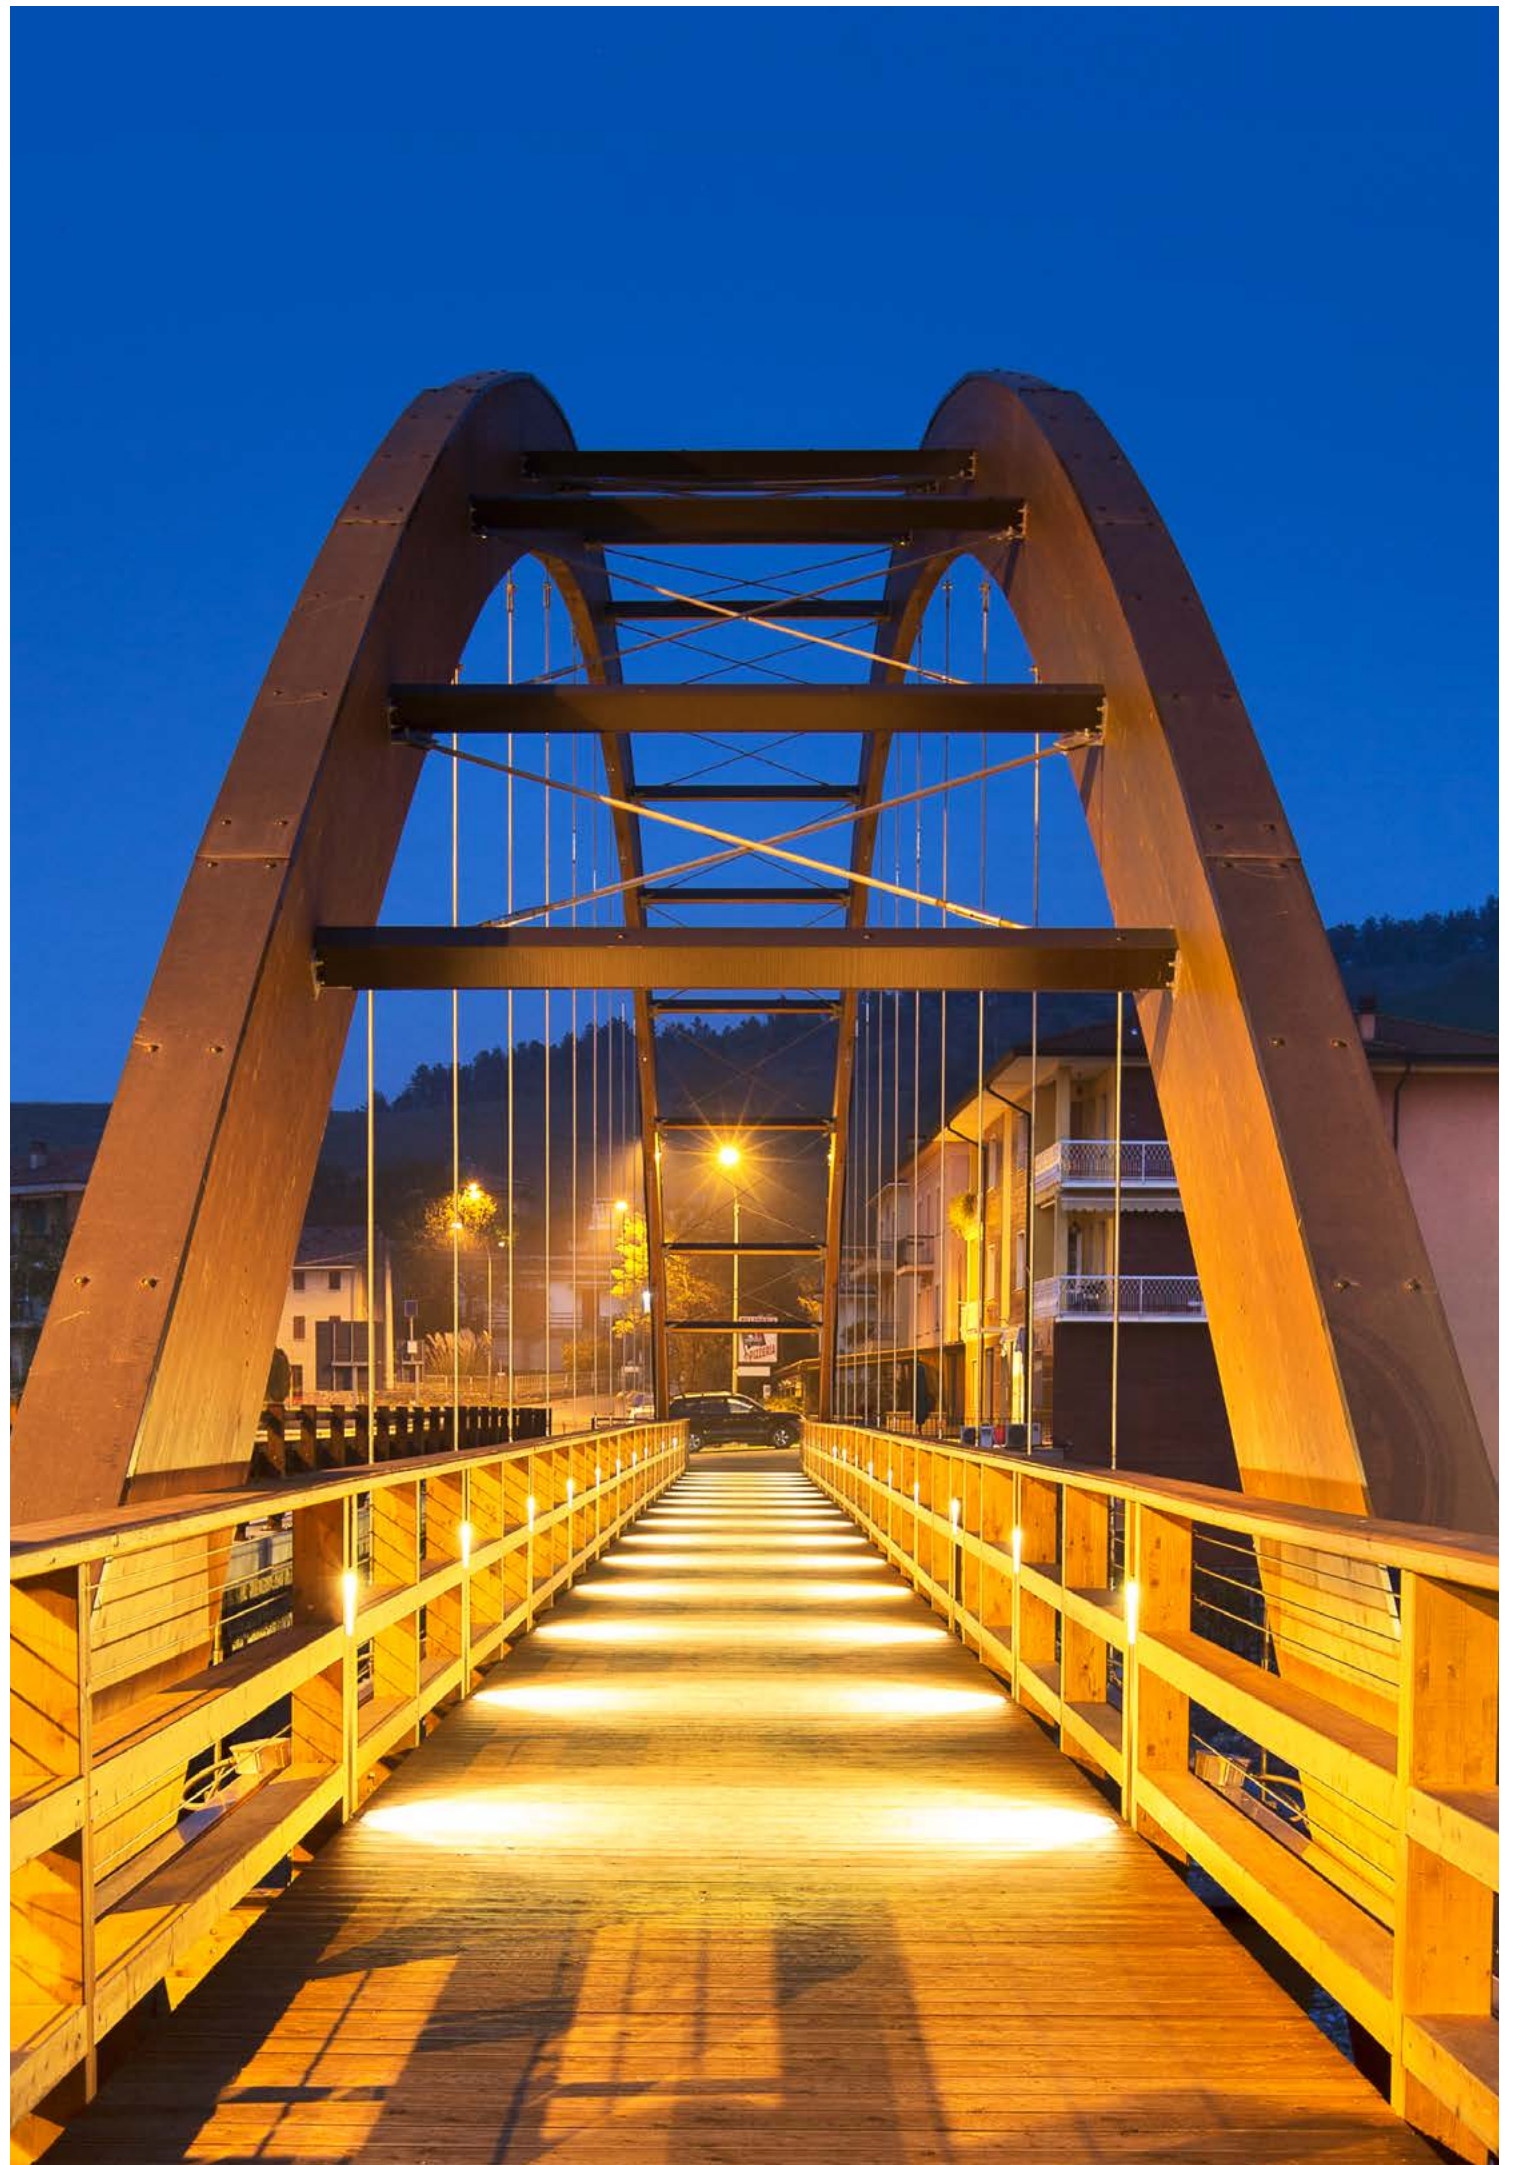

bollard

# bollard



bollard

Family of stalks from clean, elegant design and a thickness of just 36 mm, Slim is a stalk in discrete forms that can also be installed close to different walls, with no encumbrance. A set of rectangles composes the wicket, with a diffuser on the same plane of the body completely flush. Available in two heights and with mono and bi-directional emission, it is suitable for walkways and paths of parks and gardens.



# collection



IP65  
IK 08

5 mm serigraphed  
extra-clear glass

h. 500 mm  
h. 800 mm

## WHITE LED

3000K CRI>70  
220-240V 0/50/60Hz

4000K available on request

### → h. 500 mm



8,8W | 540 lm (\*)  
1 opening



810 cd/klm

### → h. 800 mm



8,8W | 540 lm (\*)  
1 opening



810 cd/klm

### → h. 500 mm



8,8 W | 600 lm (\*)  
2 openings



410 cd/klm

### → h. 800 mm



8,8 W | 600 lm (\*)  
2 openings



410 cd/klm

(\*) Real Data

## details

Extruded aluminium alloy body. Fully concealed floor fixing flange. Gore valve to prevent condensing. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

## standard finishes



.06 grey



.08 anthracite




.09 bronze

## on request finishes



.01 black



.02 white



.07 corten