

LED SOLAR WALL LAMP



Product&Family Code: 078 014 0002

SOLARIS-2

Technical Data

Voltage & Battery type	Li-ion Battery 3.7V 2600mAh
Product Wattage (W)	2
Equivalence with incandescent lamp(W)	16
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4000
Materials	Aluminium Body
Protection Class	III
EEI	A to A++
Luminous Flux (lm)	275
Warm-up time up to 60 %of the full light output	Instant Full Light
Rated Life (hrs) ⌚	50.000
IP Rating	65
Solar Charging Time	4-6 Hours
Duration time	3-12 Hours

WITH MICROWAVE SENSOR

STRONG LIGHT
 3 Hours
 275 lm


WEAK LIGHT
 12 Hours
 18 lm

2 modes available:

First Mode:
 Weak Light all time - Strong Light while motion detected

Second Mode:
 Strong Light all time

Technical Drawing

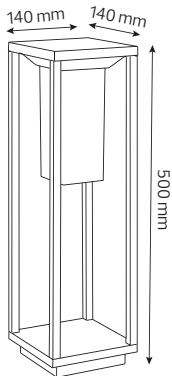

Applications

- Designed Outdoor applications: Gardens

Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- LED Lamp Base.
- Innovative Design of Assembly Structure

