

Reference

2300.

Application

Floor Lamps


Description

Floor light designed by Margot Viarnés. The base is lacquered white or quartz grey and its diffuser is made of shiny opal triplex blown glass. It features a double switch for general ambient light and LEDs.

Diffuser


Shiny opal triplex blown-glass diffuser

Finish



2300-03. White lacquer
2300-18. Quartz grey lacquer

Sketch



Electrical characteristics

2 x LED STRIP 24V 0,84W
AND



OR
2 x LED STRIP 24V 0,84W
2 x COMPACT FLUORESCENT E27 230V 11W



2 x E27 230V 60WX

Total 122 W

Total 24 W



Physical characteristics

2 Box / 1.11 x 0.39 x 0.37 m. / Vol. 0.2400 m³ /
Gross weight 29.0 kg. / Net weight 26.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 55.27%
Coordinate system : C-G
Total flux : 1199.00 lm
Maximum value : 65.94 cd/klm
Light position : C=45.00 G=35.00
Double symmetrical : 3

Isolux : Isolux (Suelo)
Light position :
X=0.00m Y=0.00m Z=3.00m
Light rotation :

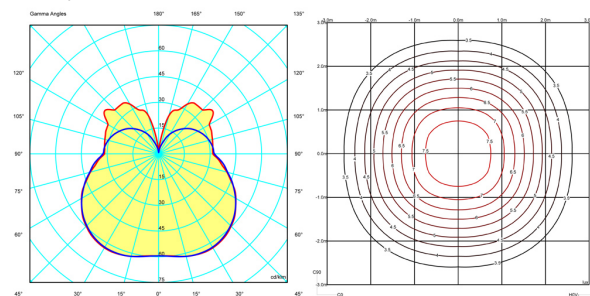

Certificates

