

TUBE collection






lighting post



lighting post



detail

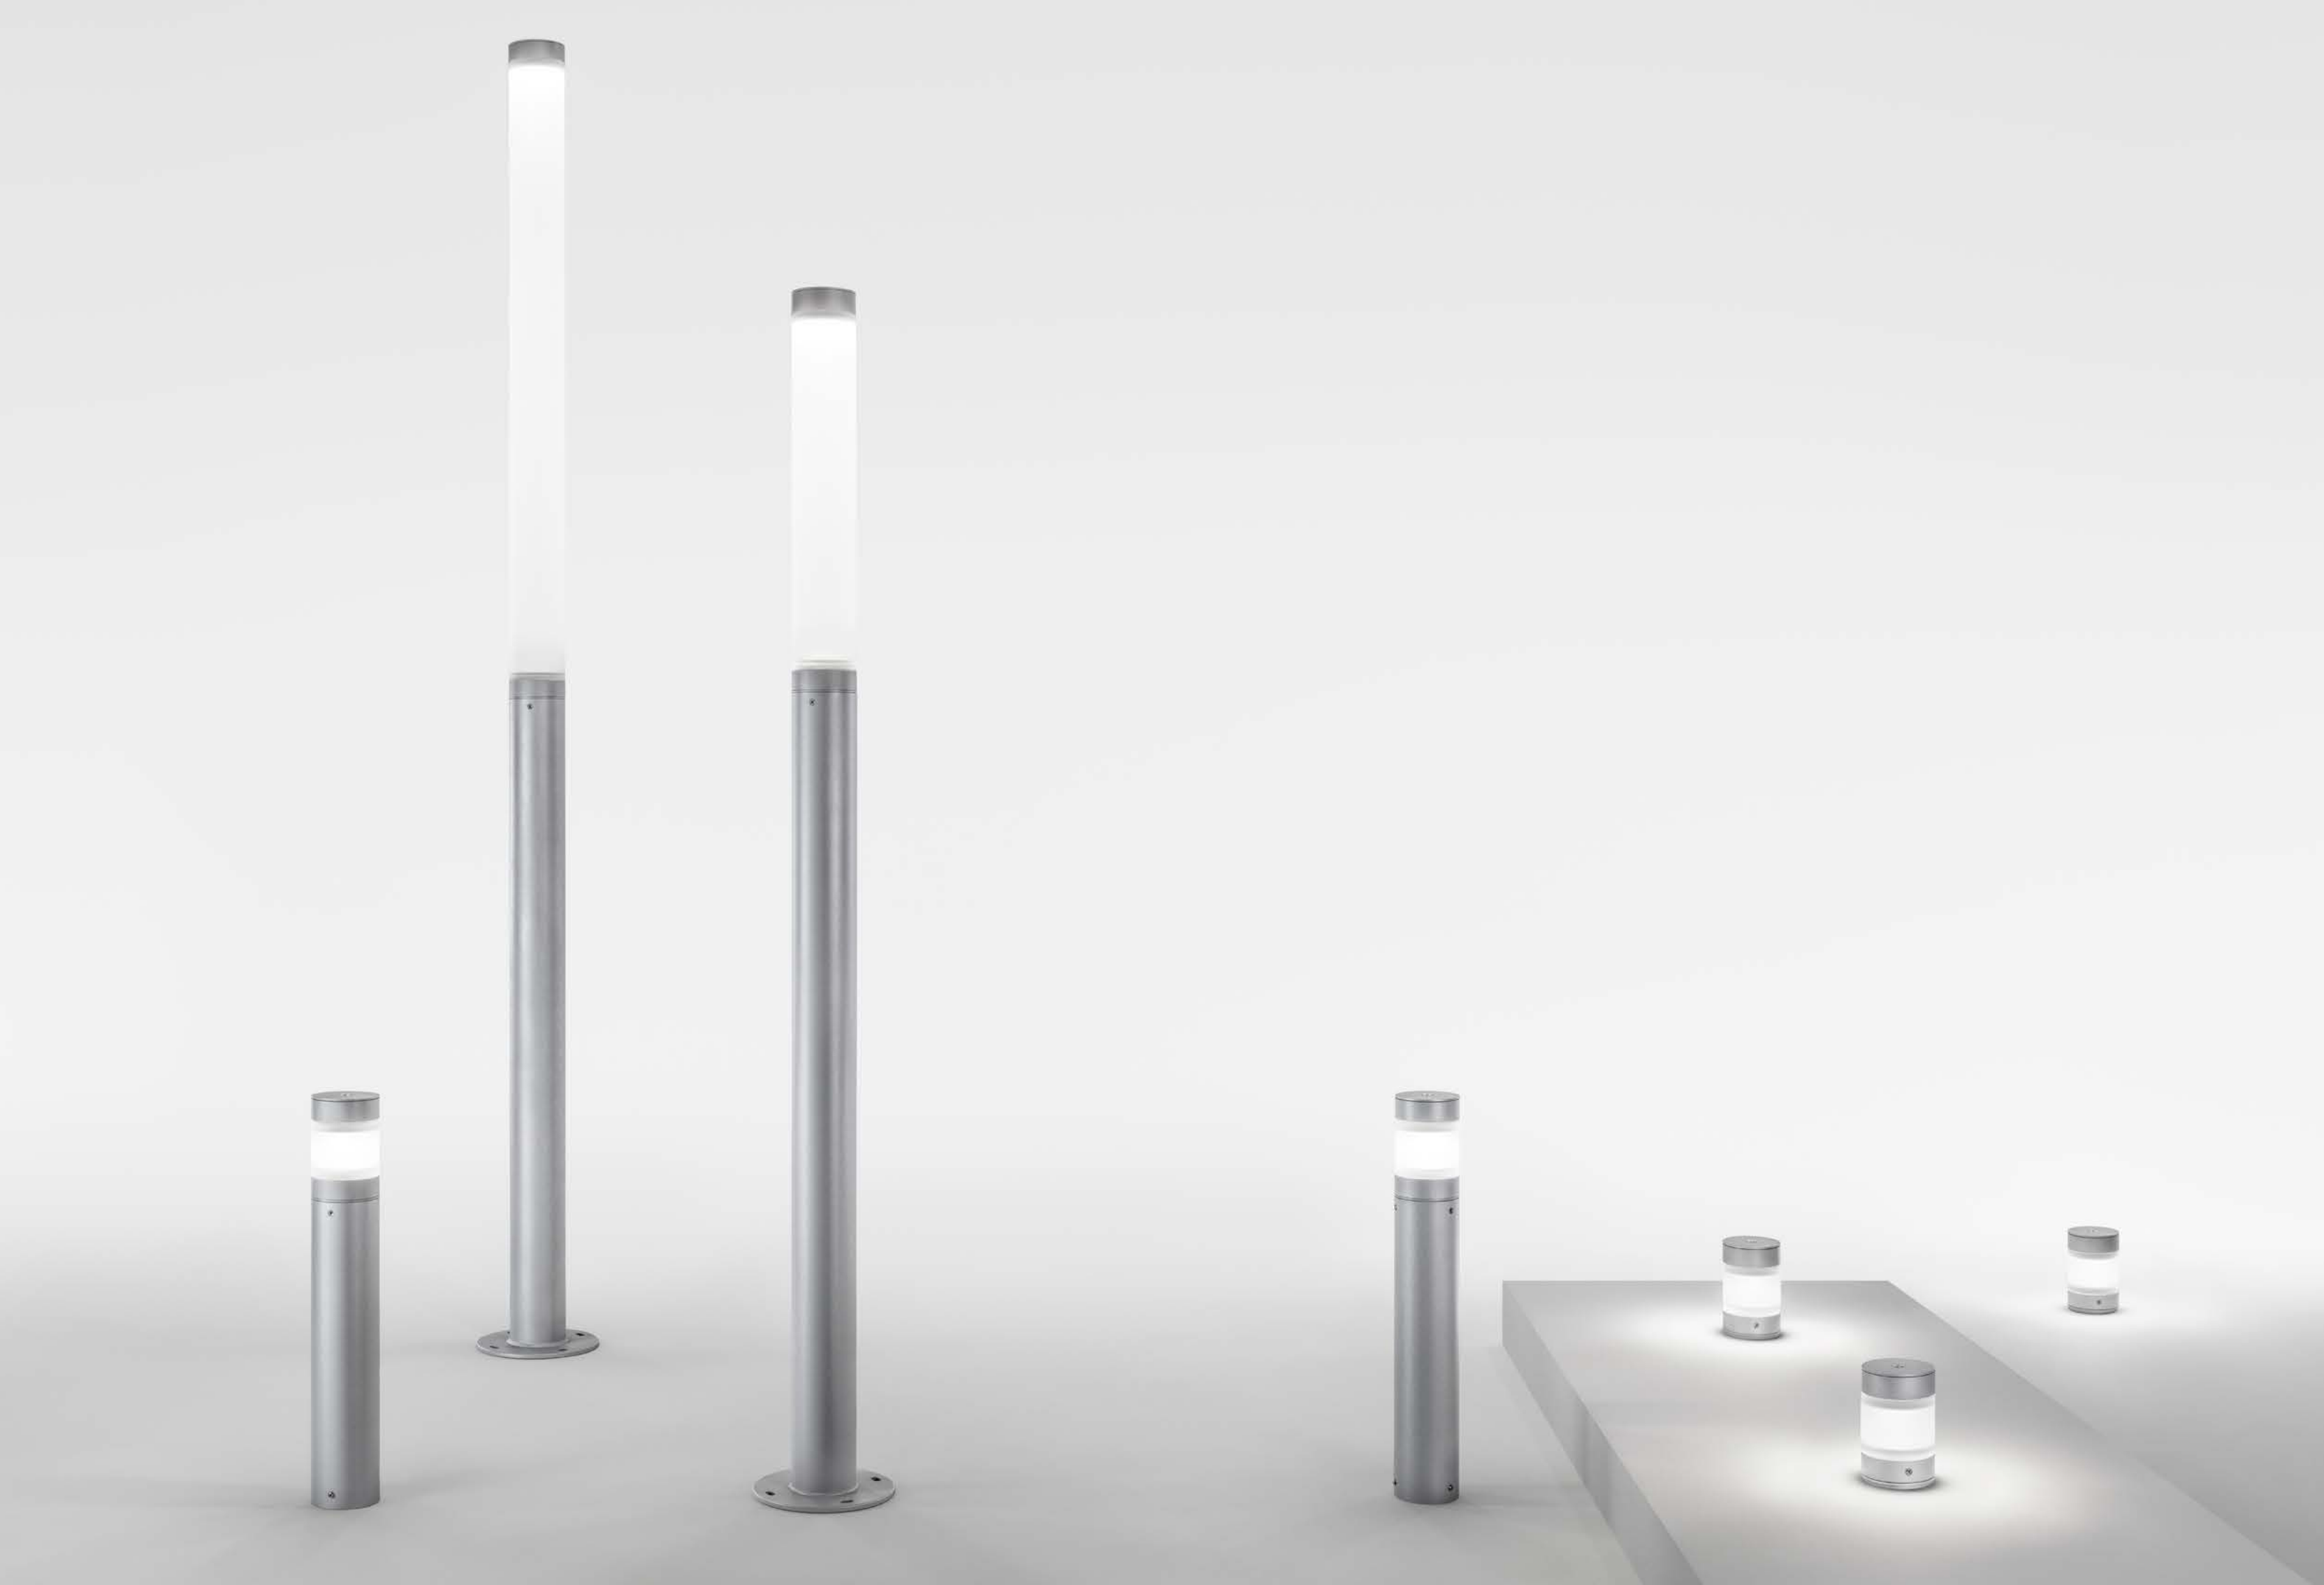

collection




lighting post

IP65
IK 10

PMMA diffuser

ø 160 mm

h. 260 mm
h. 1000 mm




urban lighting

IP65
IK 10

PMMA diffuser

ø 160 mm

h. 3000 mm
h. 4000 mm




lighting post



ø 160 mm

h. 260 mm
h. 1000 mm



WHITE LED

3000K CRI>80
220-240V 0/50/60 Hz

2700K / 4000K
available on request

→ h. 260 mm



10W | 415 lm (*) ⊕
transparent diffuser



105°
260 cd/klm

→ h. 1000 mm



20W | 920 lm (*) ⊞
transparent diffuser



105°
260 cd/klm

→ h. 260 mm



10W | 610 lm (*) ⊕
sandblasted diffuser



120°
150 cd/klm

→ h. 1000 mm



20W | 1250 lm (*) ⊞
sandblasted diffuser



120°
150 cd/klm

RGBW LED

max. 500mA ⬢
4 channels +
1 channel NTC

→ h. 260 mm



11,5W lm (*)
sandblasted diffuser

→ h. 1000 mm



16,5W (*)
sandblasted diffuser

details

Extruded aluminium alloy body. Die-cast head made of aluminium alloy with very low copper content. A4 Stainless steel screws. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. PMMA Diffuser.

standard finishes

on request finishes



.06 grey




.08 anthracite



.09 bronze



.01 black



.02 white



.07 corten

(*) Real Data






urban lighting

urban lighting



ø 160 mm
 h. 3000 mm
 h. 4000 mm



WHITE LED

3000K CRI>80
 220-240V 50/60 Hz

2700K / 4000K
 available on request

→ h. 3000 mm



42W | 2015 lm (*)
 transparent diffuser



75°
 275 cd/klm

→ h. 4000 mm



42W | 2015 lm (*)
 transparent diffuser



75°
 275 cd/klm

→ h. 3000 mm



42W | 2835 lm (*)
 sandblasted diffuser



105°
 150 cd/klm

→ h. 4000 mm



42W | 2835 lm (*)
 sandblasted diffuser



105°
 150 cd/klm

RGBW LED

max. 500mA
 4 channels +
 1 channel NTC

→ h. 3000 mm



35W lm (*)
 sandblasted diffuser

→ h. 4000 mm



35W (*)
 sandblasted diffuser

(*) Real Data