


TRIS collection



lighting post urban lighting

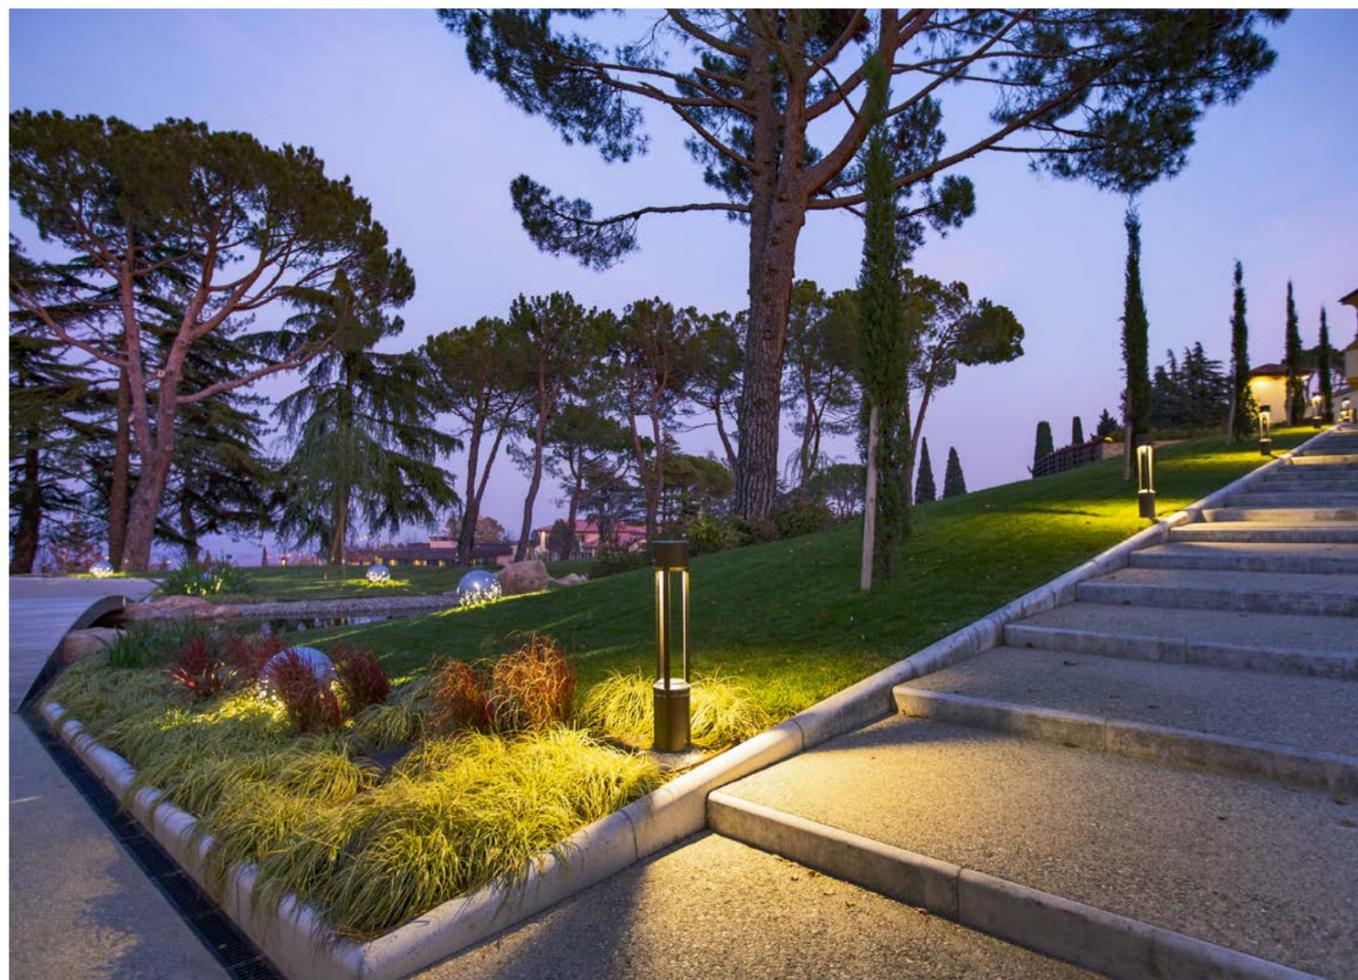

lighting post

This collection is defined by classic elegant lines because of a linear design which is sober, free of sharp corners and generated by a cylindrical volume. The upper part of the structure is separated from the lower one and it is lightened by 3 posts. When on, the structure of Tris disappears from sight, transformed into light. A series dedicated to the urban furniture, suitable for pedestrian areas and parks.






lighting post



urban lighting

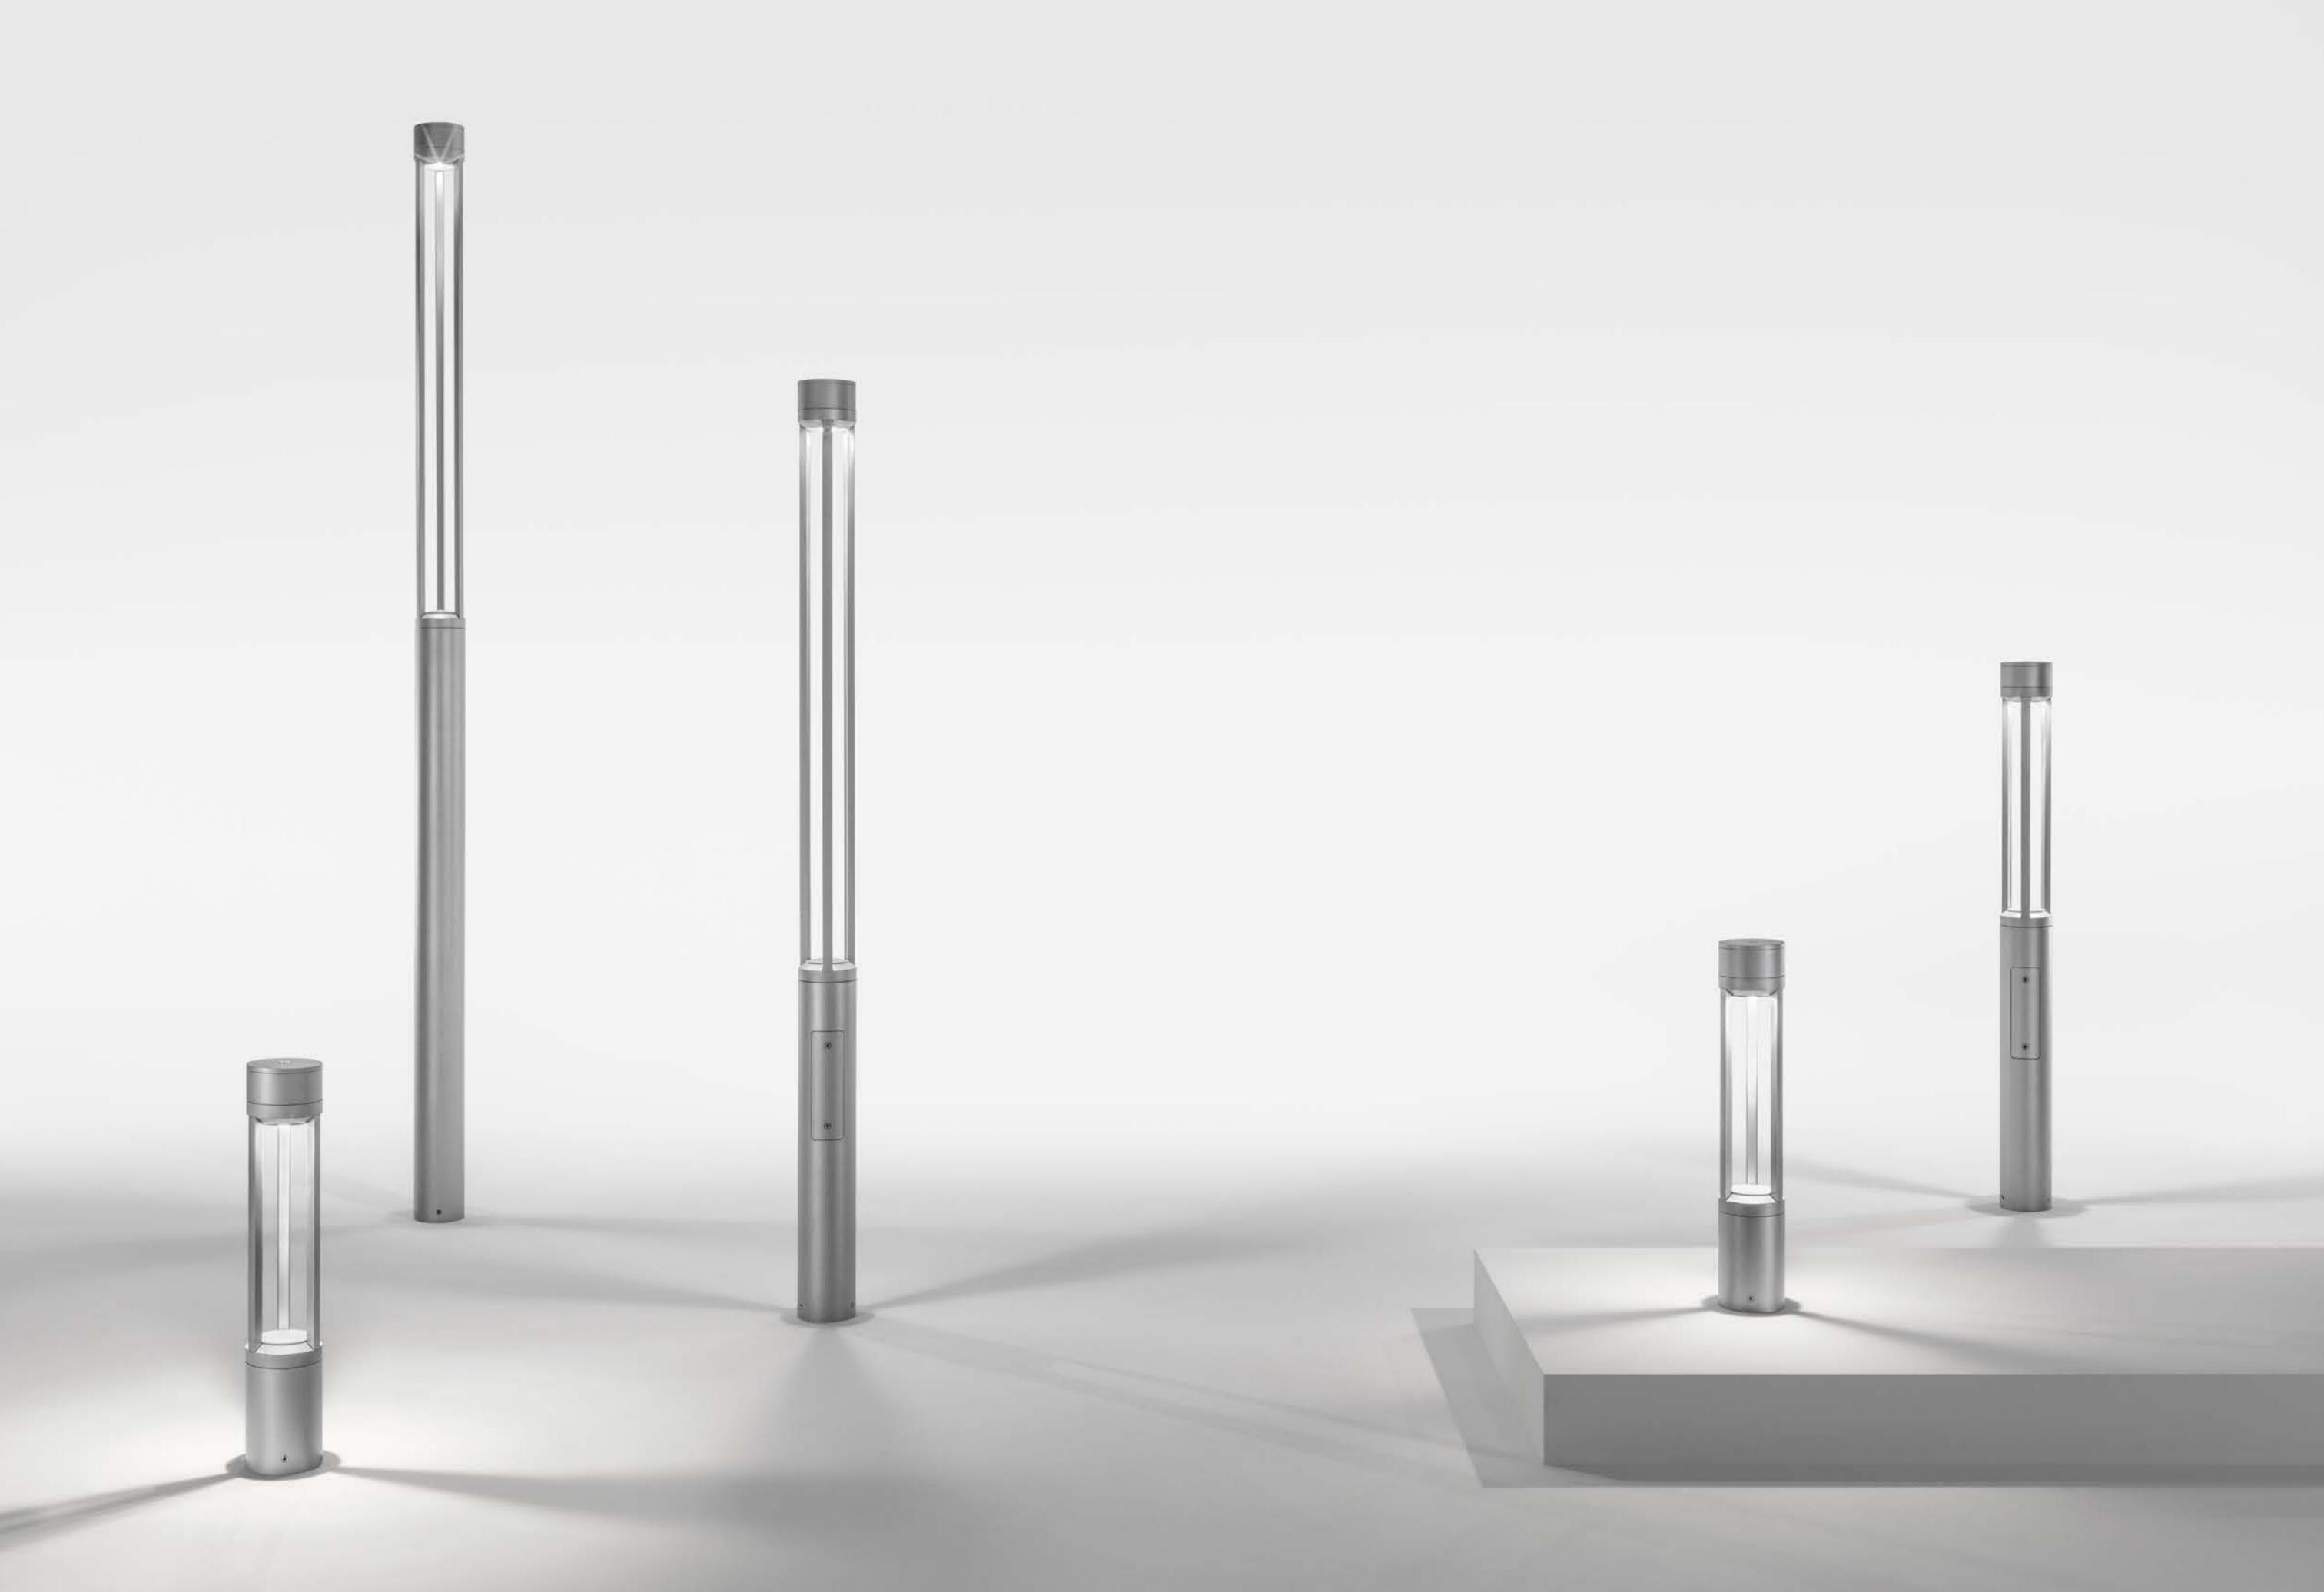

collection




lighting post

IP66
IK 10

4 mm PMMA diffuser

ø 160 mm

h. 900 mm
h. 1800 mm




urban lighting

IP66
IK 10

4 mm PMMA diffuser

ø 160 mm

h. 2600 mm
h. 3600 mm




lighting post



ø 160 mm

h. 900 mm
h. 1800 mm



WHITE COB LED

→ h. 900 mm

→ h. 1800 mm

3000K CRI>80
220-240V 50/60 Hz



21W | 2070 lm (*)
transparent diffuser



26W | 2880 lm (*)
transparent diffuser

2200K / 2700K / 4000K
available on request



309 cd/klm



309 cd/klm

urban lighting



ø 160 mm

h. 2600 mm
h. 3600 mm



WHITE COB LED

→ h. 2600 mm

→ h. 3600 mm

3000K CRI>80
220-240V 50/60 Hz



39W | 3820 lm (*)
transparent diffuser



39W | 3820 lm (*)
transparent diffuser

2200K / 2700K / 4000K
available on request



309 cd/klm



309 cd/klm

details

Extruded aluminium alloy body. Die-cast body and flange made of aluminium alloy with very low copper content. A4 Stainless steel screws. Fully concealed floor fixing flange. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. PMMA diffuser Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

standard finishes

on request finishes



.06 grey




.08 anthracite



.09 bronze



.01 black



.02 white



.07 corten

(*) Real Data