

#### Features

- Low-threshold design for easy entry and exit.
- Recessed rear drain.
- Single threshold for three-wall installation.
- Requires K-9332 Groove aluminum drain cover or K-9336 Groove teak drain cover (sold separately).

#### Material

- Acrylic.

#### Required Products/Accessories

K-9332 Drain Cover

or

K-9336 Drain Cover

#### Recommended Products/Accessories

K-9132 Shower Drain  
K-702208-G54 Frameless Sliding Shower Door  
K-702208-G73 Frameless Sliding Shower Door  
K-702208-L Frameless Sliding Shower Door  
K-702209-L Frameless Sliding Shower Door  
K-705704-L Frameless Pivot Shower Door  
K-705710-L Frameless Pivot Shower Door  
K-705716-L Frameless Pivot Shower Door  
K-705722-L Frameless Pivot Shower Door  
K-705728-L Frameless Pivot Shower Door  
K-705740-L Frameless Pivot Shower Door  
K-705809-L Semi-Frameless Pivot Shower Door  
K-705822-L Semi-Frameless Pivot Shower Door  
K-705823-L Semi-Frameless Pivot Shower Door  
K-706008-D3 Frameless Sliding Shower Door  
K-706008-L Frameless Sliding Shower Door  
K-706010-L Frameless Sliding Shower Door  
K-706011-L Frameless Sliding Shower Door  
K-706014-D3 Frameless Sliding Shower Door  
K-706014-L Frameless Sliding Shower Door  
K-706016-L Frameless Sliding Shower Door  
K-706017-L Frameless Sliding Shower Door  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner



#### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162







ASTM E662


#### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar

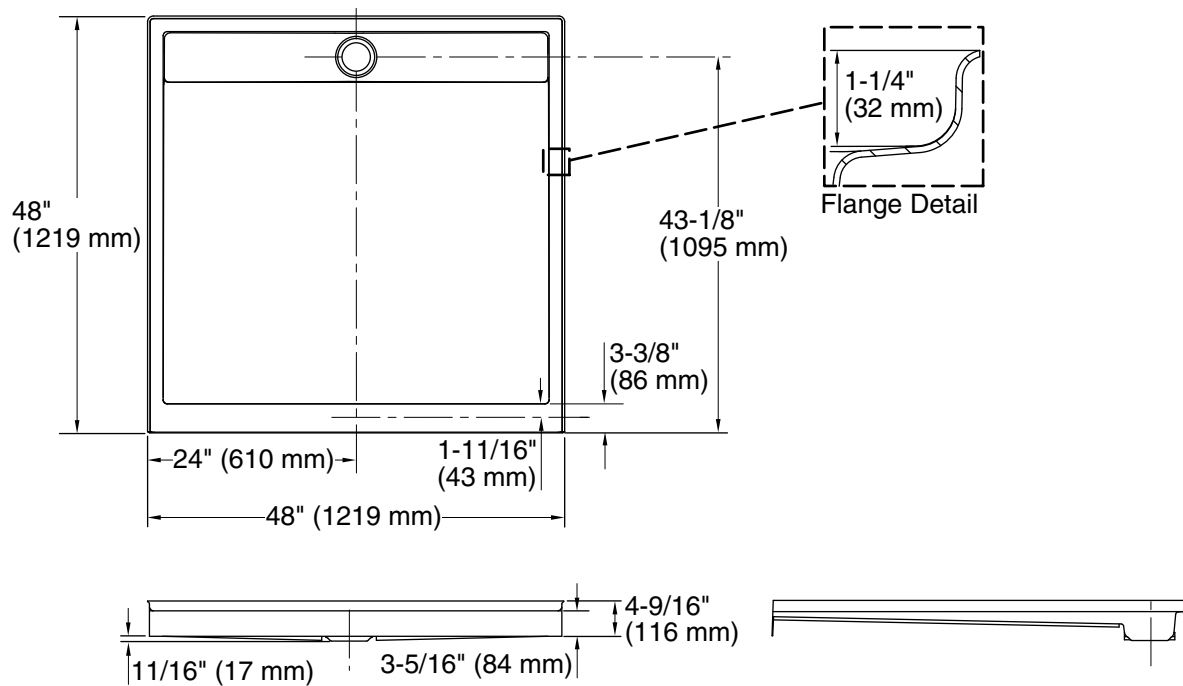

#### Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Center rear
Weight:	66 lbs (29.9 kg)
Minimum floor load:	20 lbs/ft <sup>2</sup> (97.6 kg/m <sup>2</sup> )

#### Notes

- Measure your actual product for rough-in details.
- Install this product according to the installation instructions.
- Shimming may be required to level the fixture.
- Shimming may be required between the stud frame and the fixture.
- Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).