

# TETRA PARCO collection




# lighting post urban lighting




lighting post

A family of poles from rationalist design. Tetra Parco is a small light architectural structure: the body with a square section is composed of two separate volumes by two uprights supporting the light source. At power-on, this ephemeral structure disappears from sight, transforming into two beams of geometrical light which creates a suggestive alternation of light and shadow on the floor. Tetra Parco is an efficient tool for the lighting of open spaces, pedestrian areas and urban zones.

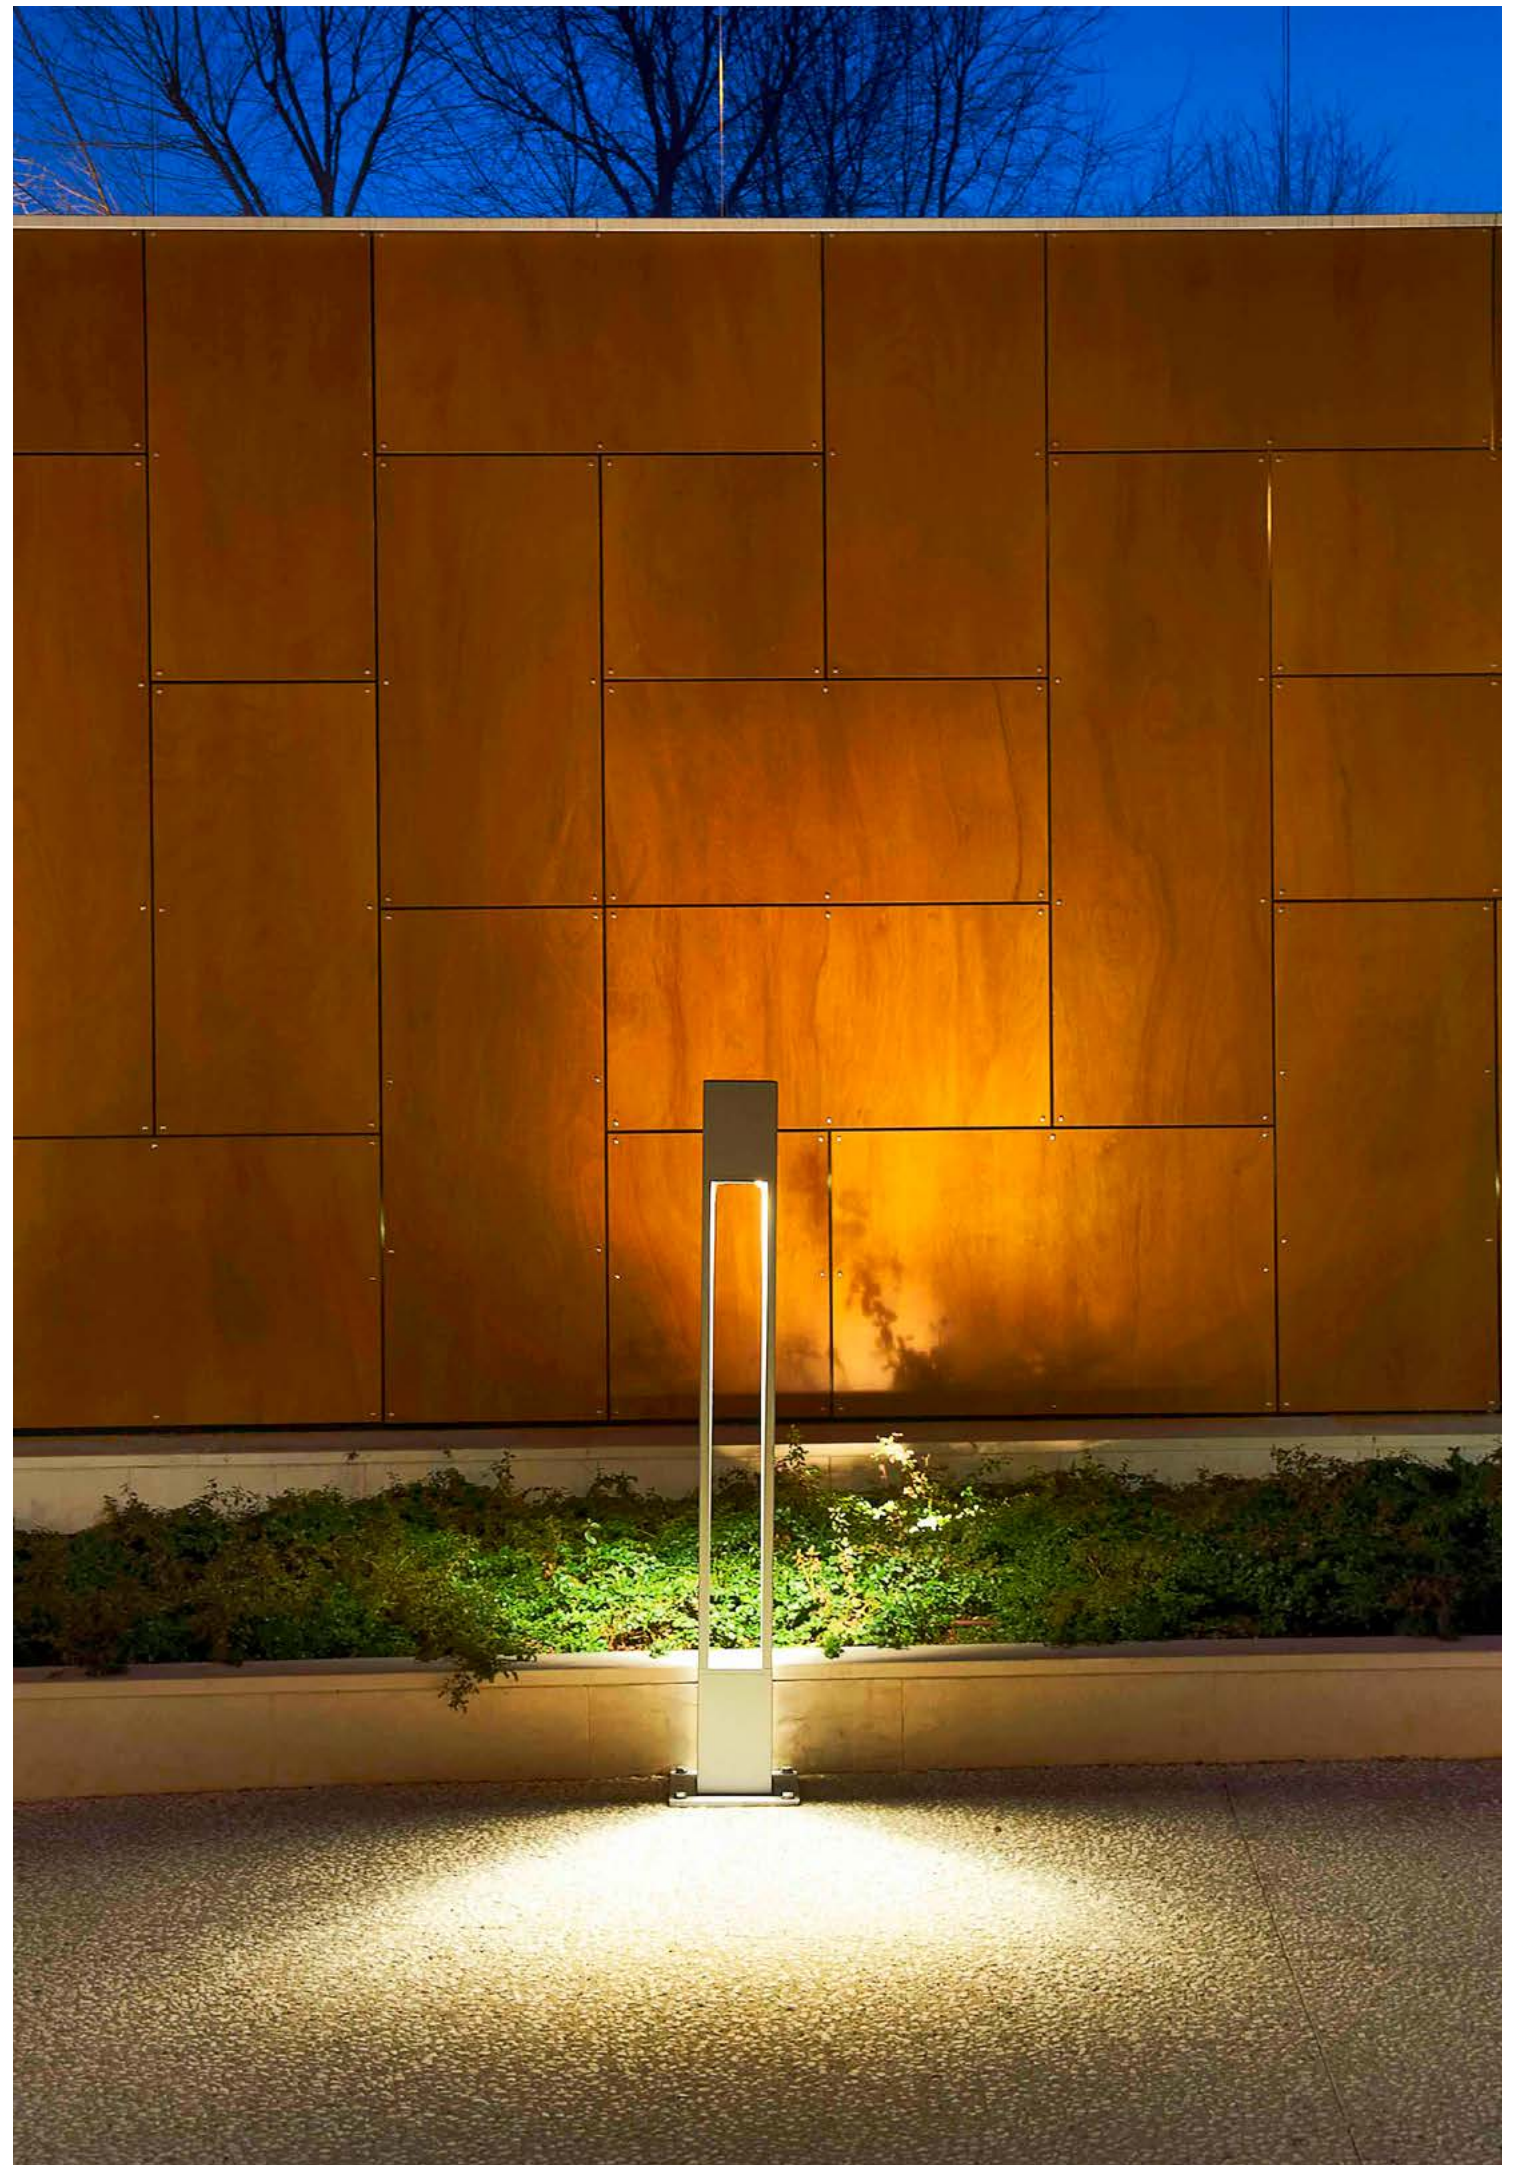

lighting post

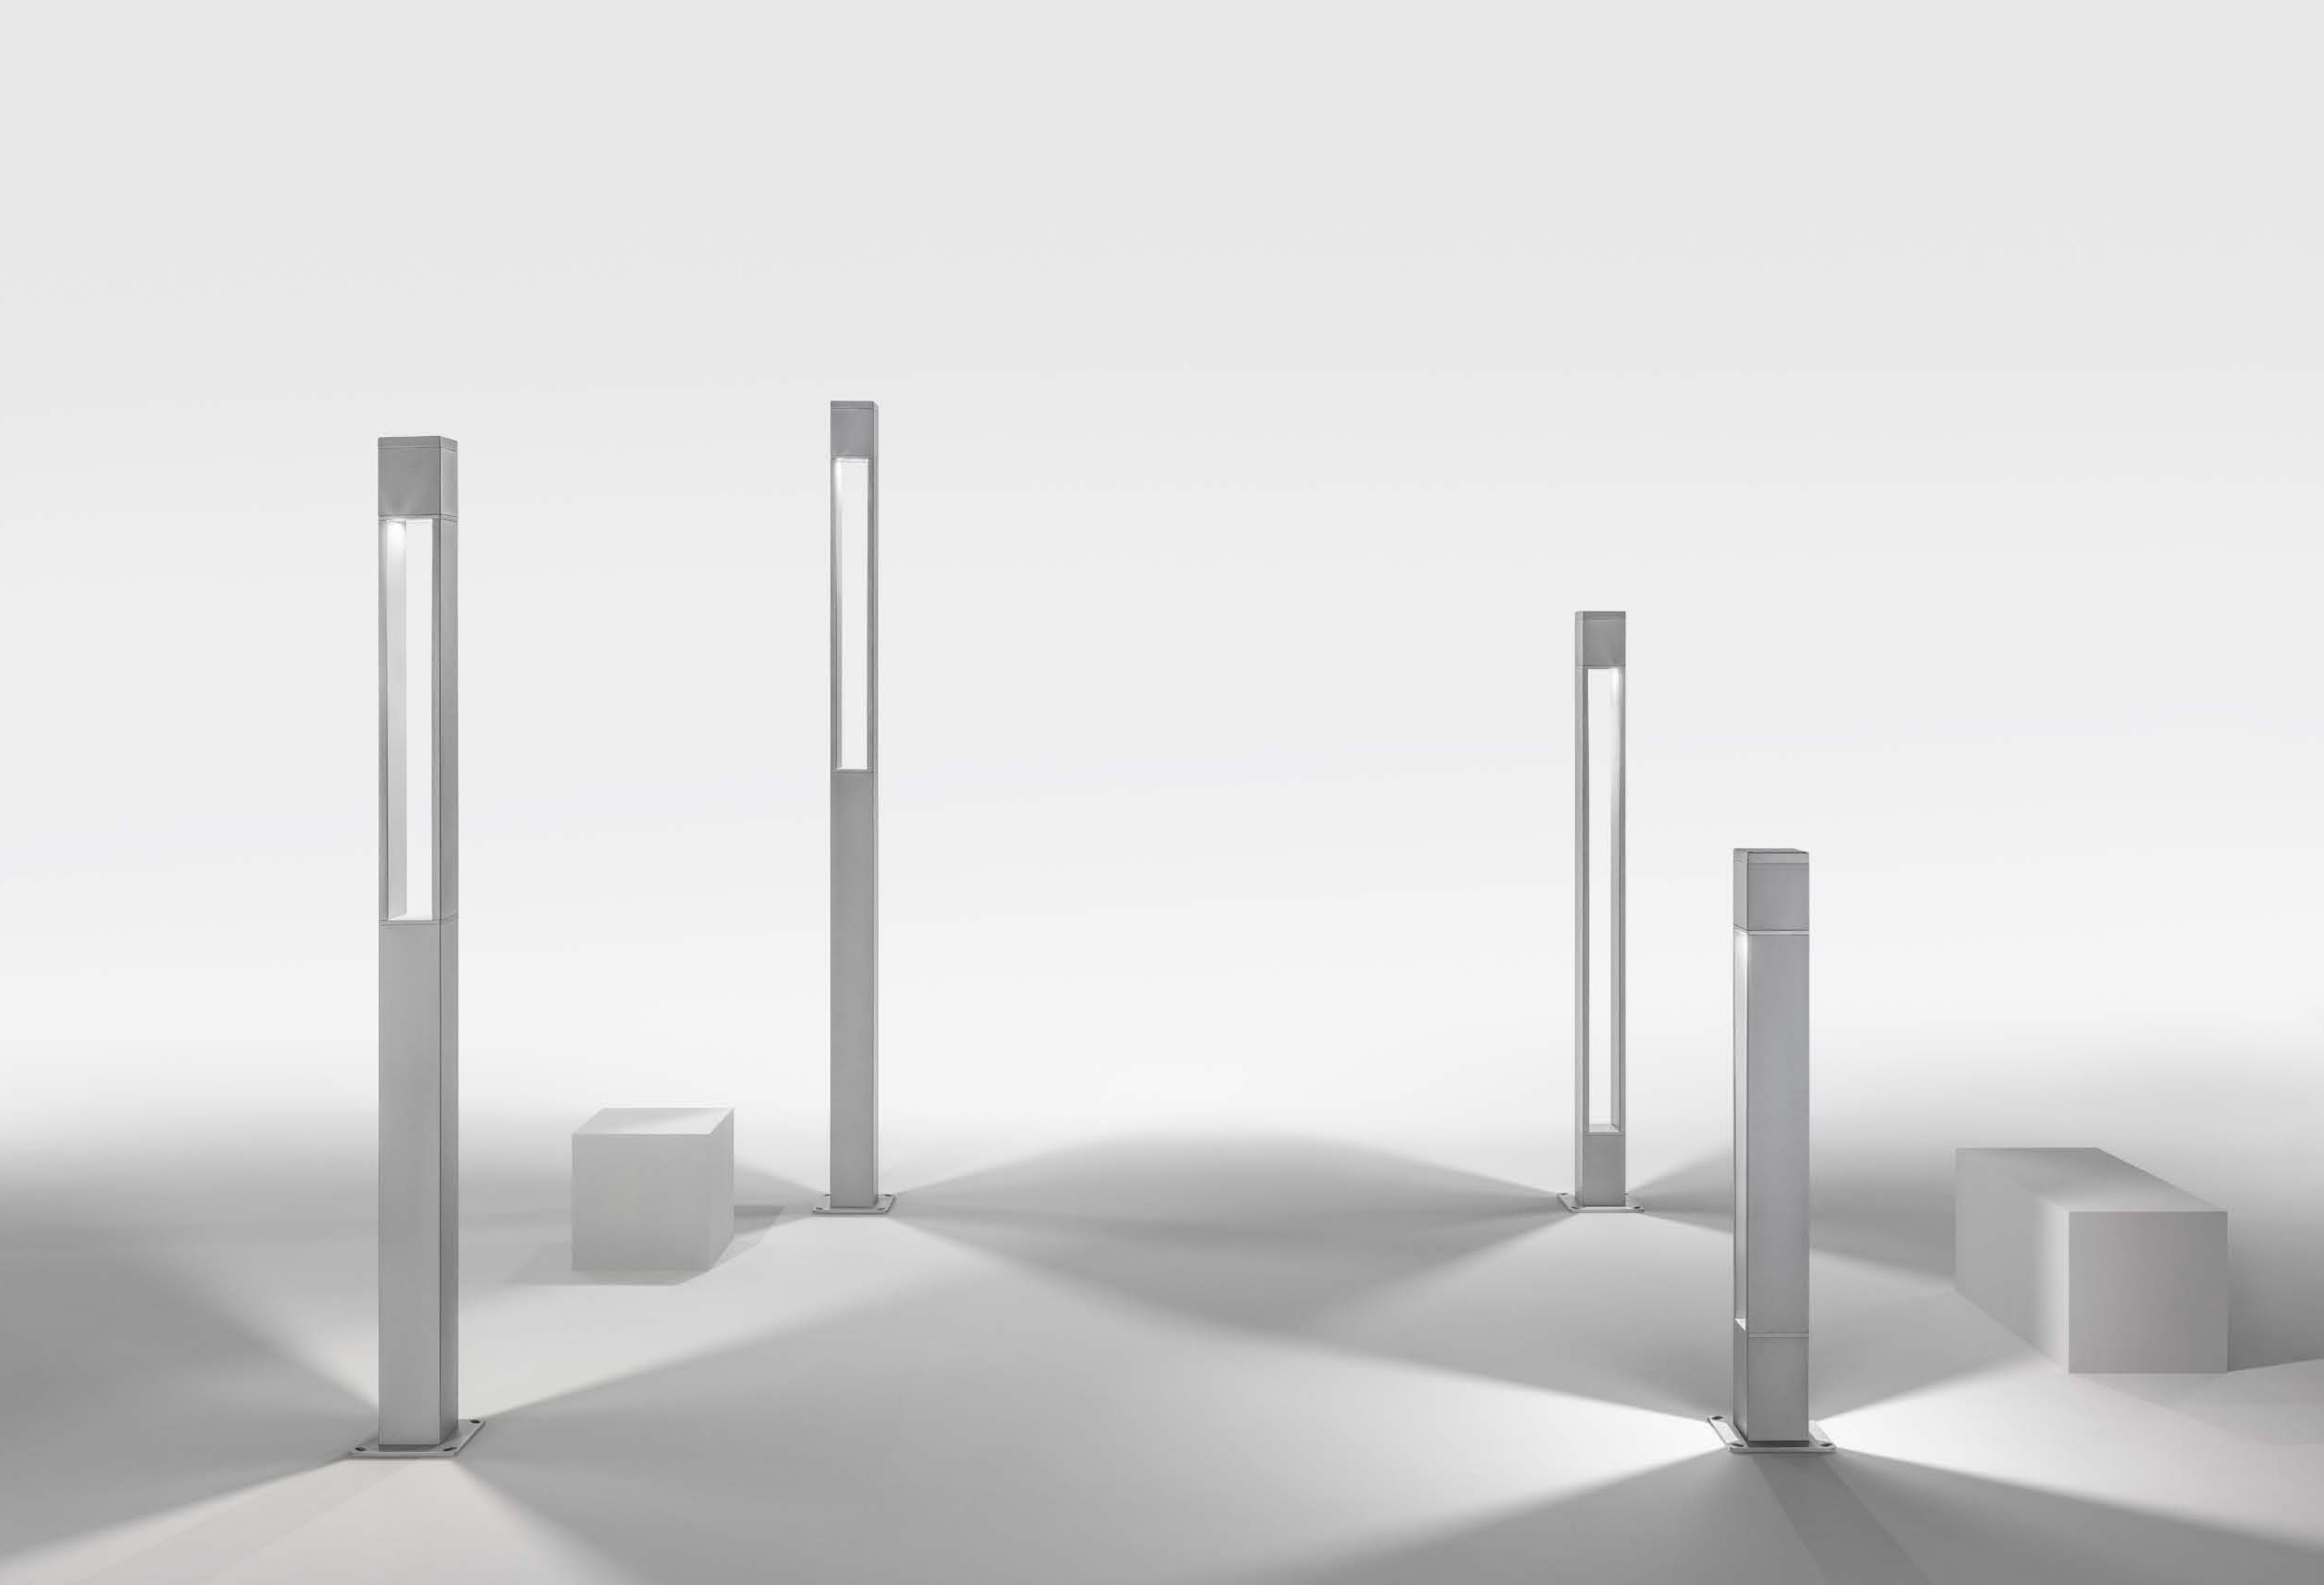

# collection



lighting post


IP65  
IK 10

12 mm flat tempered  
extra clear glass

IP68 connector included

∅ 140 mm

h. 1330 / 1930 mm



urban lighting


IP65  
IK 10

12 mm flat tempered  
extra clear glass

IP68 connector included

∅ 140 mm

h. 2270 / 2600 mm




# lighting post



∅ 140 mm

h. 1330 mm  
h. 1930 mm



WHITE COB LED

→ h. 1330 mm

→ h. 1930 mm

3000K CRI>80  
220-240V 0/50/60 Hz



28W | 1620 lm (\*)  
2 openings



28W | 1620 lm (\*)  
2 openings

2700K / 4000K  
available on request



715 cd/klm




715 cd/klm

# urban lighting



∅ 140 mm

h. 2270 mm  
h. 2600 mm



WHITE COB LED

→ h. 2270 mm

→ h. 2600 mm

3000K CRI>80  
220-240V 0/50/60 Hz



41W | 2390 lm (\*)  
2 openings



41W | 2390 lm (\*)  
2 openings

2700K / 4000K  
available on request



710 cd/klm




710 cd/klm

# details

Extruded aluminium alloy body and shoulders. Die-cast head made of aluminium alloy with very low copper content and aluminium alloy floor fixing flange. A4 Stainless steel screws. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. PMMA diffuser. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

## standard finishes


## on request finishes



.06 grey



.01 black



.02 white



.07 corten



.08 anthracite



.09 bronze

(\*) Real Data