Features

- Includes Forté® 1.75-gpm multifunction handshower, 60" metal hose, 30" slidebar and transitional slidebar trim.
- Advanced spray engine provides three experiences: full coverage, pulsating massage and silk spray.
- Full-coverage spray produces an encompassing spray for everyday use and utilizes Katalyst® air induction to create large, full drops.
- Pulsating massage spray targets sore muscles to ease away aches and pains.
- Silk spray releases a dense, luxurious spray ideal for rinsing.
- Thumb tab allows for a smooth transition between sprays.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- 1.75 gpm (6.6 lpm) flow rate.
- 30" slidebar features adjustable mounting brackets for installation flexibility.
- Coordinates with Forté®, Alteo® and Refinia® faucets and accessories.

Material

- KOHLER finishes resist corrosion and tarnishing.

Recommended Products/Accessories

K-23723 Faucet cleaner

ADA **OBC**

WaterSense • Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
OBC

KOHLER® Faucet Lifetime Limited Warranty
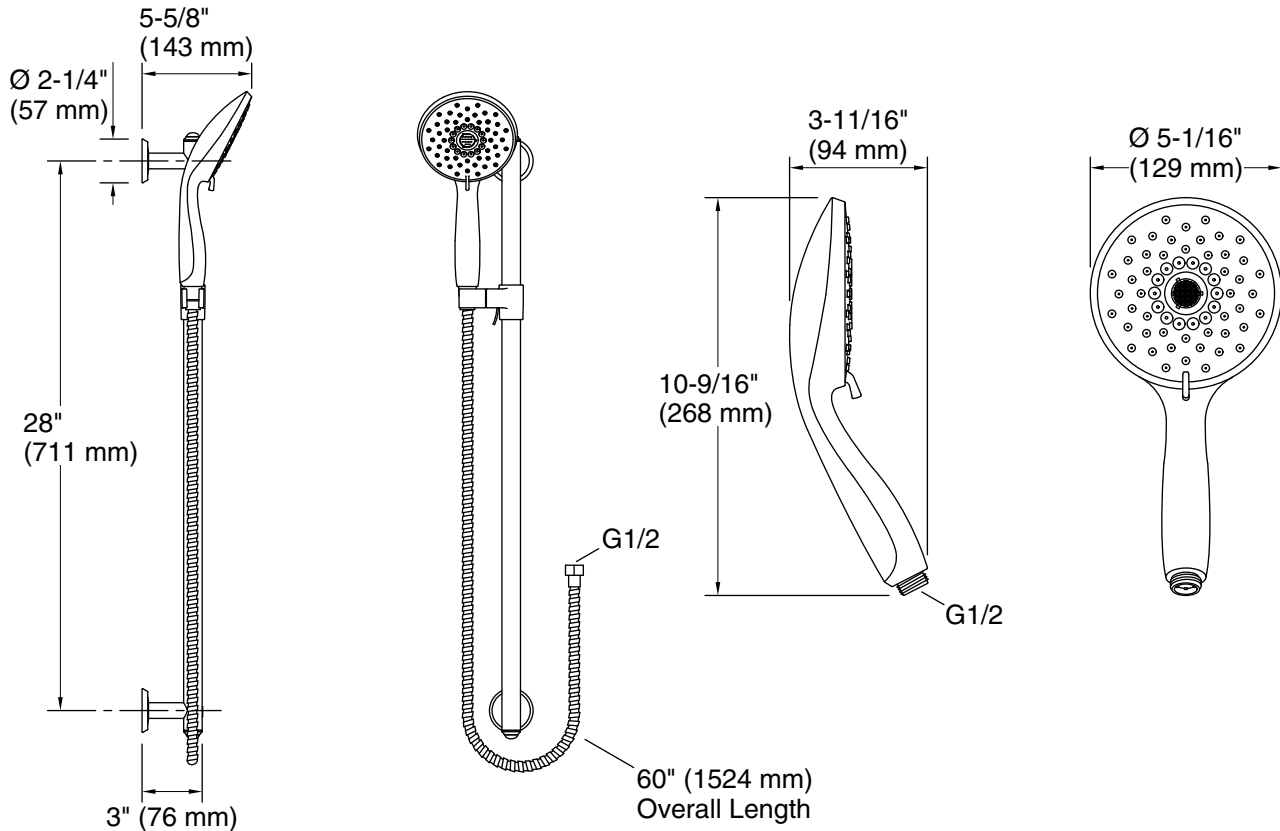See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
3-22-2020 05:57 - US/CA

THE BOLD LOOK
OF KOHLER®

5-5/8"
(143 mm)

Ø 2-1/4"
(57 mm)

28"
(711 mm)

3" (76 mm)

G1/2

60" (1524 mm)
Overall Length

3-11/16"
(94 mm)

10-9/16"
(268 mm)

G1/2

Ø 5-1/16"
(129 mm)

Technical Information
All product dimensions are nominal.

Handshower:
Rated maximum flow: 1.75 gal/min (6.6 l/min)
Pressure: 45 psi (3.1 bar)

Notes
Install this product according to the installation instructions.

IMPORTANT! The slide bar must be mounted to stud framing supports at both the top and bottom mounting locations. Plastic wall anchors will not support the slide bar. Do not use or depend on plastic wall anchors to attach the slide bar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
3-22-2020 05:57 - US/CA

THE BOLD LOOK
OF KOHLER®