

# FU2011CP Futura FU Satinjet Slide Rail Shower

## INSTALLATION GUIDE

### TECHNICAL SPECIFICATIONS

**Operating Pressure:**

Min 35kPa, Max 500kPa.

Recommended installation of a pressure limiting valve if supply exceeds 500kPa

**Operating Temperature:**


Max 70°C.

NB: New Zealand building code clause G12 - Water Supplies specifies all outlets used primarily for personal hygiene shall deliver water at a safe temperature.

Inlet connections: All 1/2" BSP

**Notes:**

- After installation all connections must be checked for leaks.
- All installations must be carried out in compliance with relevant water regulations.

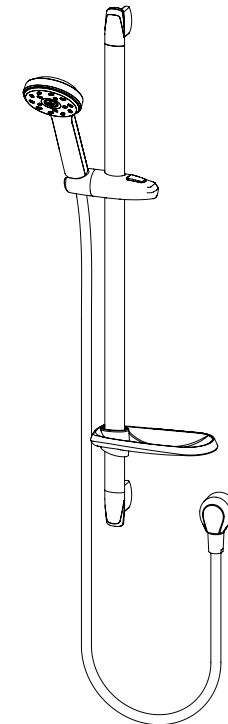

Methven warrants this product against manufacturing defects and that it is suitable for use under the operating conditions specified in this instruction sheet.

For your warranty please refer to [www.methven.com](http://www.methven.com) or call Customer Service.

New Zealand  
0800 804 222


Australia  
1300 638 483

UK  
0800 195 1602




NOTE FOR HANDSET ONLY INSTALLATIONS - use step 5 only.

1.

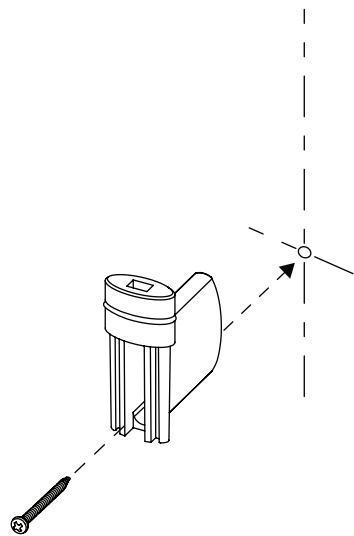


Locate the bottom bracket in the desired position and attach with one screw.

2.

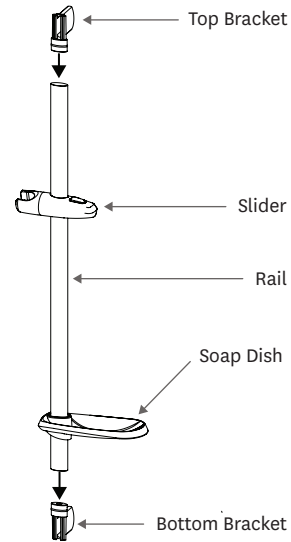


Attach the slider and the soap dish to the rail in the desired orientation. Fit the rail to the bottom bracket. Fit the top bracket to the rail.

3.

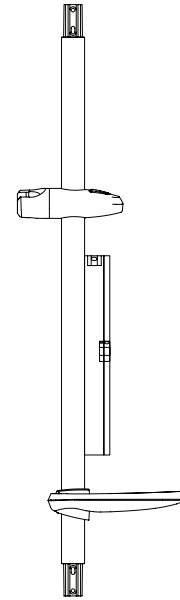


Ensure that the rail is vertical.

4.

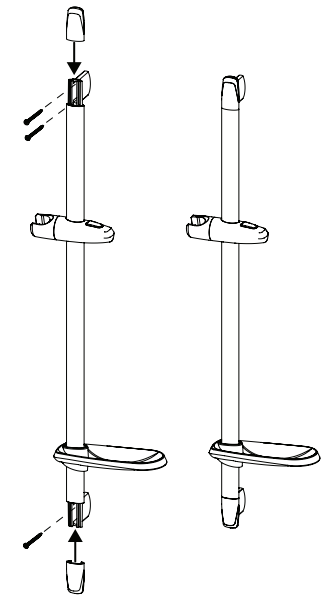


Insert the remaining screws. Fit the end caps.

5.

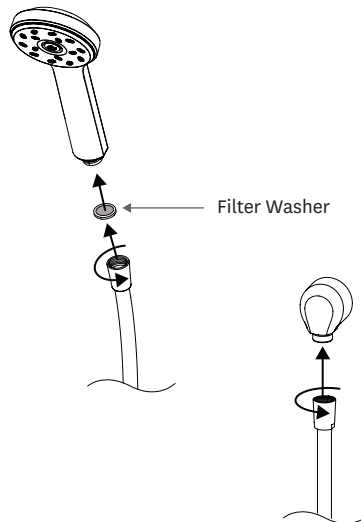

For handset only installations remove existing hose. Insert the filter washer into the new hose before screwing to the handset.

6.

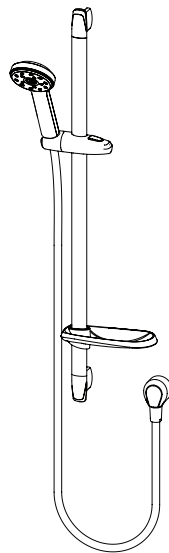


Adjust shelf and slider position to desired height.



### CLEANING

Water contains lime which remains on the surface after the water has evaporated. These lime deposits can be prevented from forming by wiping immediately after use.

To clean the chrome-plated surfaces use a soft cloth, soap and warm water. Never use cleaning agents that contain a corrosive acid or a scouring additive.



Do not use any sharp objects to clean nozzles.

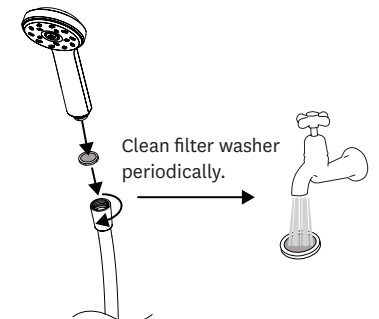

Clean filter washer periodically.

**NOTE: Removal of the flow restrictor in the handset may be necessary to optimise flow performance in low or unequal pressure systems only**