## EASTON

# EAKM12

Easton Vintage Two Hole Bridge Gooseneck Kitchen Faucet, Metal Lever Handles



#### **TECHNICAL DETAILS**

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 1/4" Deck Thickness Minimum: 0" Fittings Hole Diameter: 1" Flow Restriction Options: 1.75, 1.5, 1.0 Handle Spread Maximum: 7 7/8" Handle Spread Minimum: 7 7/8" Handle Turn Angle: Quarter Turn Depth / Width: 13 1/4" Height: 16" Inlet Connection Size: 1/2" Inlet Connection Type: Straight Male Threads Inlet Supply Spread Maximum: 10 7/8" Inlet Supply Spread Minimum: 4 7/8" Length: 13 1/2" Number of Holes: Two Hole Primary Material: Brass Restricted Maximum Flow Rate: 2.2 gpm Spray Included in Unit: N Suggested Application: Bar, Kitchen, Laundry Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN EASTON VINTAGE TWO HOLE BRIDGE GOOSENECK KITCHEN FAUCET, METAL LEVER HANDLES| EAKM12

#### **INSPIRATION**

Code # EAKM12: CEC Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

**CODES & STANDARDS** 

#### **PRODUCT FEATURES**

Brass metal is used for all trim and valve components

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Easton is our most comprehensive fittings family.

Easton has a clean-lined utilitarian profile, with a slightly elongated spout.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in other flow options. Contact a sales associate for details.

#### CERTIFICATIONS




**PRODUCT (NOTES)** 

Spray sold separately

## EASTON

Easton Vintage Two Hole Bridge Gooseneck Kitchen Faucet, Metal Lever Handles

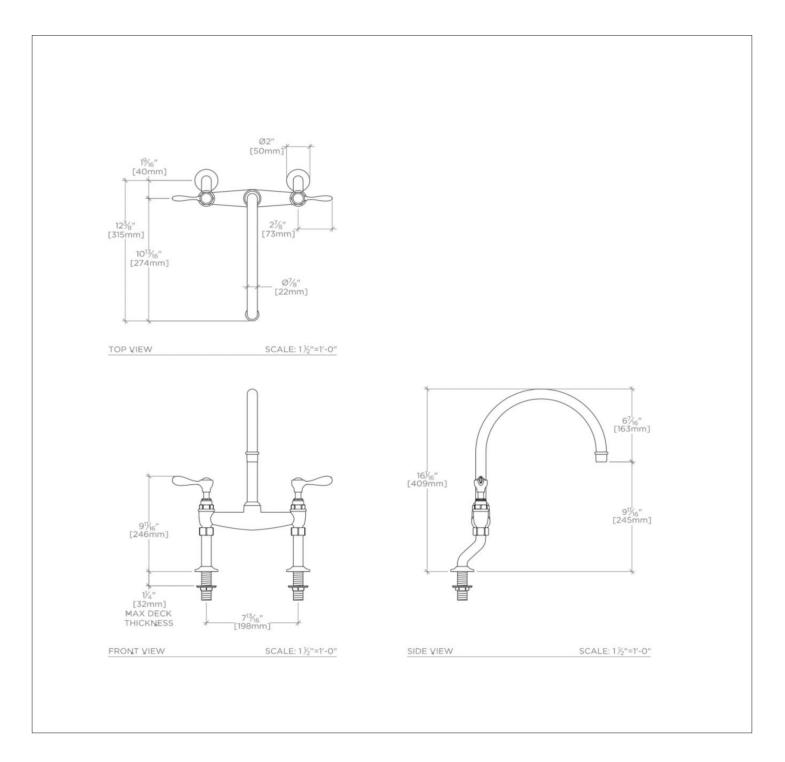

## EAKM12