

KOHLER

Wellworth®

Two-piece elongated dual-flush toilet K-3988-RA

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Right-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf).
- 2-1/8" (54 mm) fully-glazed trapway.
- Coordinates with other products in the Wellworth collection.
- Combination consists of the K-4198 bowl and the K-4458-RA tank.
- Seat not included.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt installation.

Water Conservation & Rebates

Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 Elongated cleansing toilet seat

K-5420 Low-Profile Bolt Caps

K-9236 Trip Lever Dual Flush

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

Included Components

Product consists of:

K-4458-RA Toilet tank, dual-flush

K-4198 Elongated Bowl

K-9236 Trip Lever Dual Flush

Additional Components:

Bolt cap accessory pack

Bowl

Tank

Tank cover

Trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense®

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





Wellworth®

Two-piece elongated dual-flush toilet K-3988-RA

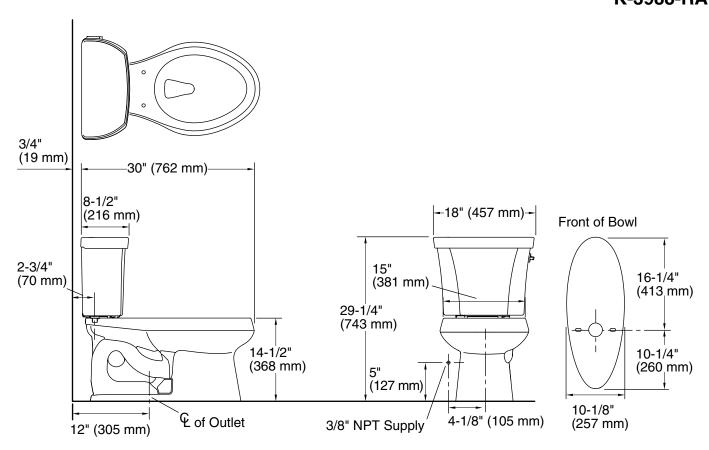

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)
Reduced: 1.1 gpf (4.3 lpf)

Water surface size: 11-1/4" x 8-1/4" (286 mm x 210 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

