


64110 04 45 66 MONOMANDO DE DUCHA CON KIT KELOGIC KELOGIC SINGLE LEVER SHOWER MIXER WITH KIT

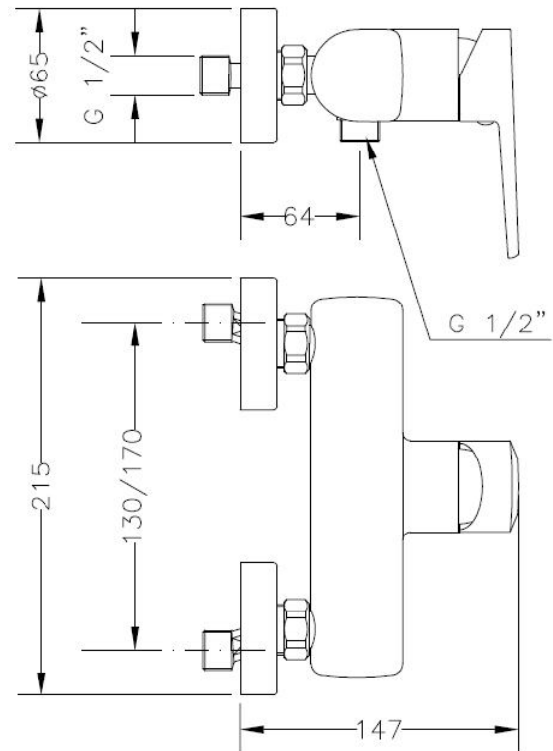

Características

- 1) Cuerpo y florones realizados en latón según UNE-EN 1982.
- 2) Maneta realizada en Zamak.
- 3) Cromado según EN 248.
- 4) Cartucho cerámico silencioso Ø40 con salida dirigida.
- 5) Suministrado con válvula anti retorno con limitador de caudal.
- 6) Suministrado con flexo ducha de PVC (170 cm), mango de ducha, soporte y excéntricas de latón para fijación.
- 7) Caudal mínimo: 8 l/min (3 bar).
- 8) Temperatura máxima uso: 85 °C.
- 9) Temp. máx. recomendada: 65 °C.
- 10) Presión máxima uso: 10 bar.
- 11) Presión mínima uso: 0,5 bar.
- 12) Presión recomendada: 1 - 5 bar.

Features

- 1) Body and covers made in brass according to UNE-EN 1982.
- 2) Handle made in Zamak.
- 3) Chrome plated according to EN 248.
- 4) Guided outlet noiseless Ø40 ceramic cartridge.
- 5) Fitted with check-valve with flow reducer.
- 6) Fitted with PVC flexible hose (170 cm long), hand-shower, shower holder and fixing brass made eccentrics nuts.
- 7) Minimum flow rate: 8 l/min (3 bar).
- 8) Maximum use temperature: 85 °C.
- 9) Max. recommended temp.: 65 °C.
- 10) Maximum use pressure: 10 bar.
- 11) Minimum use pressure: 0,5 bar.
- 12) Recommended pressure: 1 - 5 bar.