
WATERWORKS

BOULEVARD

BDTF88

Boulevard Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

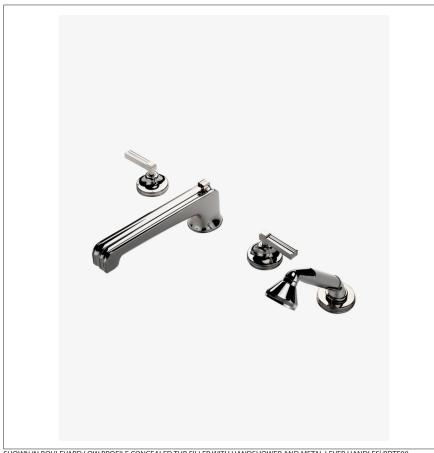

TECHNICAL DETAILS

ADA Compliance: No Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 11/16" Deck Thickness Minimum: 0" Diameter of Head: 2" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Depth / Width: 11" Height: 6" Index Marking: Blank Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Adapter Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Length: 13" Number of Handles: Two Number of Holes: Four Hole Pivot: N Primary Material: Brass Spout Swivel: N Suggested Application: Bath Valve Material: ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN BOULEVARD LOW PROFILE CONCEALED TUB FILLER WITH HANDSHOWER AND METAL LEVER HANDLES BDTF88

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

Code # BDTU88: ASME A112.18.1, CSA B125, IAPMO, State of MA

PRODUCT FEATURES

Brass metal is used for all trim and valve components.


The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.





BOULEVARD

Boulevard Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

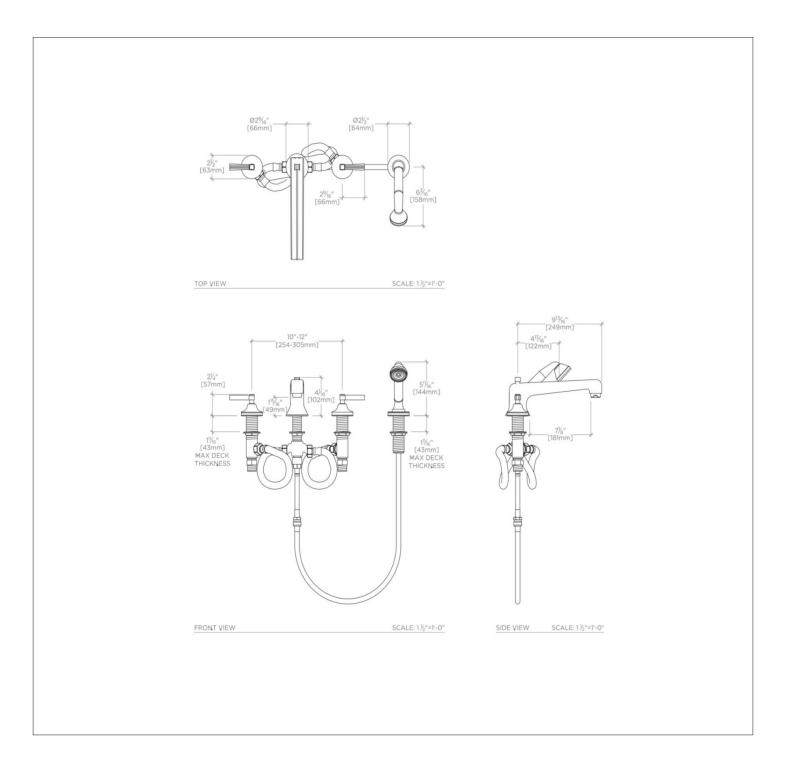

BDTF88